

2000 Argentia Road, Plaza One, Suite 203 Mississauga, Ontario, Canada L5N 1P7 t: 905.826.4044

October 3, 2024

VIA E-MAIL TO: slauzon@distrikt.com


Sasha Lauzon, M.Pl., MCIP, RPP Vice President of Development & Planning Distrikt 90 Wingold Avenue, Unit 1 Toronto, Ontario M6B 1P5

Re: Reliance Letter – Noise Feasibility Study, Proposed Mixed-Use/Residential Development, Oakville TOC Development, 217 – 227 Cross Avenue and 571 – 587 Argus Road, Oakville, Ontario

Dear Sasha,

As requested, we are providing this reliance letter for the proposed mixed-use/residential development located at 217 – 227 Cross Avenue and 571 – 587 Argus Road in Oakville, Ontario. Our previous report was entitled, "Noise Feasibility Study, Proposed Mixed-Use/Residential Development, 217 – 227 Cross Avenue and 571 – 587 Argus Road, Oakville, Ontario" dated March 15, 2024. The latest site plan for the proposed development prepared by BDP Quadrangle dated September 20, 2024, is attached.

The building locations are generally the same as those included in the previous report. The heights of the proposed buildings have increased by 9-storeys for Building A, 3-storeys for Building B, and Building C has been reduced by 6-storeys. The recommendations included in our previous report remain valid. The detailed study will be submitted with the next Oakville TOC submission which will include responses to comments provided by the Town of Oakville including, updated road and rail traffic information, a review of detailed floor plans and building elevations to refine glazing requirements, and a statement regarding air traffic noise. We trust this is sufficient for your current purposes, please feel free to contact us if you have any further questions or concerns.

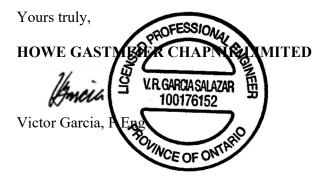

Any conclusions or recommendations provided by HGC Engineering in this letter/memo have limitations as detailed on our website: https://acoustical-consultants.com/limitations/.









2000 Argentia Road, Plaza One, Suite 203 Mississauga, Ontario, Canada L5N 1P7 t: 905.826.4044

Noise Feasibility Study Proposed Mixed-Use/Residential Development 217 – 227 Cross Avenue and 571 – 587 Argus Road Oakville, Ontario

Prepared for:

Oakville Argus Cross LP 1-90 Wingold Avenue North York, Ontario, M6B 1P5

Prepared by



Sheeba Paul, MEng, PEng

March 15, 2024 HGC Project No. 02100093







Table of Contents

I	Introduction and Summary	1
2	Site Descriptions and Sources of Sound	2
3	Sound Level Criteria	2
3.1	Road and Rail Traffic Noise	2
4	Traffic Noise Predictions	4
4.1	Road Traffic Data	4
4.2	Rail Traffic	5
4.3	Traffic Noise Predictions	6
5	Traffic Noise Recommendations	9
5.1	Outdoor Living Areas	9
5.2	Indoor Living Areas and Ventilation Requirements	
5.3	Building Façade Constructions	10
5.4	Warning Clauses	13
5.5	Impact of the Development on Itself	
5.6	Impact of the Development on the Environment	
6	Assessment of Stationary Sources of Sound at the Proposed Residential Units	
6.1	Noise Source Description	
6.2	Criteria for Acceptable Sound Levels	
	6.2.1 Stationary Noise Criteria	
6.3	Stationary Source Assessment	20
6.4	Results	
7	Summary and Recommendations	
8	Conclusions	24

Figure 1: Key Plan

Figure 2: Proposed Site Plan

Figure 3: Aerial Photo Showing Surrounding Land Uses

Figure 4: Aerial Photo Showing Source and Receptor Locations

Figure 5: Sound Levels Due to Steady Stationary Noise Sources, Daytime Figure 6: Sound Levels Due to Steady Stationary Noise Sources, Nighttime

Appendix A: Road Traffic Data Appendix B: Rail Traffic Data Appendix C: Preliminary Drawings







1 Introduction and Summary

HGC Engineering was retained by Oakville Argus Cross LP to conduct a noise feasibility study for a proposed mixed-use/residential development located at 217 – 227 Cross Avenue and 571 – 587 Argus Road in Oakville, Ontario. The study is required by the municipality as part of the approvals process.

This report has been updated to include an updated site plan prepared by BDP Quadrangle and dated March 13, 2024.

The primary sources of noise are road traffic on the Queen Elizabeth Way (QEW), Trafalgar Road, and Cross Avenue, as well as rail traffic on the Canadian National (CN) railway to the south of the site. Road traffic data was obtained from the Ministry of Transportation (MTO), Region of Halton, and the Town of Oakville. Rail traffic data was obtained from Metrolinx and CN personnel. Traffic data was used to predict future traffic sound levels at the proposed buildings. The predicted sound levels were evaluated with respect to the guidelines of the Ministry of the Environment, Conservation and Parks (MECP), Region and Town.

The study finds that the traffic noise exceeds the MECP sound level criteria during daytime and nighttime hours at the proposed development. Acoustic barriers are required for several elevated terraces. Central air conditioning is required for the proposed buildings. Upgraded building and glazing constructions are required for the proposed buildings. When detailed floor plans and building elevations are available for the proposed buildings, the window glazing requirements should be refined based on actual window to floor area ratios.

Sound level impacts from the existing neighbouring commercial/retail uses were also investigated and were determined to be below the relevant MECP criteria. Detailed noise studies are recommended for each building as the development proposal proceeds.

Associated acoustical requirements are specified in this report. Warning clauses are recommended to inform future residents of the traffic noise impacts, the presence of the neighbouring commercial facilities and to address sound level excesses.







2 Site Descriptions and Sources of Sound

An aerial photo showing a key plan is attached as Figure 1 also showing the surrounding land uses. A site plan dated March 13, 2024 prepared by BDP Quadrangle and is included as Figure 2. The proposed development will consist of three residential towers: 37-storeys (Tower A) and 49-storeys (Tower B) each with 6-storey podiums, and 65-storeys (Tower C) with a 7-storey podium. Six levels of underground parking are expected to be provided beneath the towers with commercial/retail space provided on the ground floors.

The site is located at 217 – 227 Cross Avenue and 571 – 587 Argus Road in Oakville, Ontario. Currently the subject site includes various commercial/office buildings which are to be removed. Figure 3 shows an aerial photo showing the surrounding land uses. The remaining surrounding lands are primarily existing commercial/industrial land uses including: Holiday Inn Oakville and the Animal Hospital of Oakville to the north; All Fix Automotive, Grandeur Motors, KidLogic, a car wash and various commercial facilities to the west; various commercial buildings to the northeast; the Oakville GO Station and Avis Car Rental to the south. There are proposed mixed-use developments in the area and this is an area in transition. A site visit was conducted to investigate the noise sources associated with the surrounding uses and is further discussed in Section 6.0.

3 Sound Level Criteria

3.1 Road and Rail Traffic Noise

Guidelines for acceptable levels of road and rail traffic noise applicable to residential developments are given in the MECP publication NPC-300, "Environmental Noise Guideline Stationary and Transportation Sources – Approval and Planning", release date October 21, 2013 and are listed in Table 1 below. The Federation of Canadian Municipalities (FCM) and Railway Association of Canada (RAC) "Guidelines for New Development in Proximity to Railway Operations", dated May 2013 (RAC/FCM guidelines were also reviewed dated November 2006). The values in Table 1 are energy equivalent (average) sound levels [LeQ] in units of A-weighted decibels [dBA].







Table 1: MECP Road and Rail Traffic Noise Criteria [dBA]

Space	Daytime L _{EQ} (16 hour) Road/Rail	Nighttime L _{EQ} (8 hour) Road/Rail			
Outdoor Living Areas	55 dBA				
Inside Living/Dining Rooms	45 dBA / 40 dBA	45 dBA / 40 dBA			
Inside Bedrooms	45 dBA / 40 dBA	40 dBA / 35 dBA			

Daytime refers to the period between 07:00 and 23:00, while nighttime refers to the period between 23:00 and 07:00. The term "Outdoor Living Area" (OLA) is used in reference to an outdoor patio, a backyard, a terrace or other area where passive recreation is expected to occur. Balconies that are less than 4 m in depth are not considered to be outdoor living areas under MECP guidelines.

The guidelines in the MECP publication allow the sound level in an OLA to be exceeded by up to 5 dBA, without mitigation, if warning clauses are placed in the purchase and rental agreements to the property. Where OLA sound levels exceed 60 dBA, physical mitigation is required to reduce the OLA sound level to below 60 dBA and as close to 55 dBA as technically, economically and administratively feasible.

Indoor guidelines for rail noise are 5 dBA more stringent than for road noise, to account for the low frequency (rumbling) character of locomotive sound, and its greater potential to transmit through exterior wall/window assemblies.

A central air conditioning system as an alternative means of ventilation to open windows is required for all dwellings where nighttime sound levels outside bedroom/living/dining room windows exceed 60 dBA or daytime sound levels outside bedroom/living/dining room windows exceed 65 dBA. Forced-air ventilation with ducts sized to accommodate the future installation of air conditioning is required when nighttime sound levels at bedroom/living/dining room windows are in the range of 51 to 60 dBA or when daytime sound levels at bedroom/living/dining room windows are in the range of 56 to 65 dBA.

Building components such as walls, windows and doors must be designed to achieve indoor sound level criteria when the plane of bedroom/living/dining room window sound level is greater than 55 dBA due to nighttime and greater than 60 dBA during the daytime hours due to rail traffic noise.







Warning clauses are required to notify future residents of possible excesses when nighttime sound levels exceed 50 dBA at the plane of the bedroom/living/dining room window and daytime sound levels exceed 55 dBA in the outdoor living area and at the plane of the bedroom/living/dining room window due to rail traffic.

4 Traffic Noise Predictions

4.1 Road Traffic Data

Road traffic data for the QEW was obtained from the MTO in the form of summer average daily traffic (SADT) for the year 2019 and is provided in Appendix B. The data was projected to the year 2034 using a 2.5%/year growth rate. A daytime commercial vehicle percentage of 14% was split into 5.4% medium trucks and 8.6% heavy trucks, was used in the analysis. A day/night split of 67%/13% and a posted speed limit of 100 km/h were used in the analysis.

Road traffic data for Cross Avenue was obtained from the Town of Oakville. The data was provided in the form of peak hour turning movement counts for the year 2020 and is provided in Appendix B. The traffic data was projected to the year 2034 using a 2.5% growth rate. A commercial vehicle percentage for Cross Avenue of 5.4% was provided and split into 2.1% medium trucks and 3.3% heavy trucks. A day/night split of 90%/10% was assumed in the analysis. A posted speed limit of 50 km/h was used for Cross Avenue.

Road traffic data for Argus Road was obtained from the Town of Oakville. The data was provided in the form of peak hour turning movement counts for the year 2020 and is provided in Appendix B. The traffic data was projected to the year 2034 using a 2.5% growth rate. A commercial vehicle percentage for Argus Road of 7.8% was provided and split into 3.0% medium trucks and 4.8% heavy trucks. A day/night split of 90%/10% was assumed in the analysis. A posted speed limit of 50 km/h was used for Argus Road.

Ultimate road traffic information for Trafalgar Road was obtained from Region of Halton personnel and is provided in Appendix A. A posted speed limit of 50 km/h was used for Trafalgar Road. An existing commercial vehicle percentage of 2.7% was obtained from the Region of Halton, split into







1.5% medium trucks and 1.2% heavy trucks was also used in the analysis, along with a day-night split of 90%/10%. Table 2 summarizes the road traffic data used in the analysis.

Medium Heavy Road Name Total Cars **Trucks Trucks** Daytime 193 272 12 136 19 328 224 736 **OEW** Nighttime 95 194 5 9 7 8 9 520 110 692 Projected to 2034 **Total** 288 466 18 114 28 848 335 428 Daytime 17 839 396 622 18 857 **Cross Avenue Nighttime** 1 982 2 095 44 69 Projected to 2034 **Total** 440 691 20 952 19 821 Daytime 2 720 89 142 2 951 **Argus Road** 302 **Nighttime** 328 10 16 Projected to 2034 **Total** 99 3 022 158 3 2 7 9 Daytime 48 164 742 594 49 500 Trafalgar Road 5 500 **Nighttime** 5 352 82 66 Ultimate **Total** 53 516 824 660 **55 000**

Table 2: Road Traffic Data

4.2 Rail Traffic

Rail traffic data for the CN Oakville Subdivision was obtained from CN railway and Metrolinx/GO Transit personnel and is attached in Appendix B. This line is used for way freight and passenger operations and is classified as a principal main line. The maximum permissible train speed for way freight trains in the area of the site is 97 kph (60 mph), 129 kph (80 mph) for passenger, and 153 kph (95 mph) for GO trains. In conformance with CN and GO Transit assessment requirements, the maximum speeds, maximum number of cars and locomotives per train were used in the traffic noise analysis to yield a worst-case estimate of train noise. The data was projected to the year 2034 using a 2.5% per year growth rate. Table 3 summarises the Metrolinx and CN rail traffic data used in the analysis.





Table 3: Rail Traffic Data Projected to the Year 2034

Type of Train	Number of Trains Day/ Night	Number of locomotives	Number of cars	Max Speed (KPH)	
Way Freight	5.8 / 3.1	4	25	56	
Passenger	19.3 / 0.0	2	10	56	
GO	362.9 / 55.4	1	12	129	

Note: All GO trains are modelled as diesel, as per Metrolinx requirements

4.3 Traffic Noise Predictions

To assess the levels of traffic noise which will impact the site in the future, predictions were made using a numerical computer modeling package (*Cadna-A version 2023 MR1 build 197.5343* due to the complexity of the site. The model is based on the methods from ISO Standard 9613-2.2, "*Acoustics - Attenuation of Sound During Propagation Outdoors*", which accounts for reduction in sound level with distance due to geometrical spreading, air absorption, ground attenuation and acoustical shielding by intervening structures.

The road and rail noise sources have been included in the model as line sources included in Cadna/A which have been calibrated to Stamson. Our experience suggests that road and rail sound levels predicted by Cadna are reasonably accurate. The model road traffic values have been qualified to be within 1-2 dBA of those predicted in STAMSON 5.04, a computer algorithm developed by the MECP.

Predictions of overall sound levels from all road and rail sources were made at various representative façade locations throughout the site. The predicted sound levels from road and rail traffic impacting the proposed development are summarized in the following tables at each facade. Appendix C shows the figures indicating the predicted sound level from road and rail traffic along each façade of the proposed buildings.





Table 4: Daytime Predicted Future Sound Levels [dBA], Without Mitigation

Building	Façade		e - at Façade LeQ(16)	Daytime - at Façade Total		
2 unung	- u , u , ·	Road	Rail	L _{EQ(16)}		
	Northwest	74	<55	74		
Tower A	Northeast	71	60	71		
37-Storey	Southeast	59	61	63		
	Southwest	72	60	72		
	Northwest	74	<55	74		
	Northeast	71	59	71		
	Interior Southeast	66	59	67		
6-Storey Podium	Interior Southwest	60	58	62		
	Southeast	58	59	61		
	Southwest	72	60	72		
	7 th Floor OLA			63*		
	Northwest	70	<55	70		
Tower B	Northeast	68	61	69		
49-Storey	Southeast	60	65	66		
	Southwest	70	62	71		
	Northwest	69	<55	69		
C Ctamara Da dinan	Northeast	67	57	67		
6-Storey Podium	Southeast	60	64	66		
	Southwest	70	62	71		
	Northwest	70	<55	70		
Tower C	Northeast	68	64	69		
65-Storey	Southeast	63	67	68		
	Southwest	68	63	69		
	Northwest	70	<55	70		
	Northeast	69	64	70		
	Southeast	65	67	69		
	Southwest	65	63	67		
7-Storey Podium	Interior Northwest	64	<55	64		
	Interior Southwest	64	58	65		
	7 th Floor OLA			65*		
	8 th Floor OLA			66*		

Note: *With a minimum 1.07 m solid parapet wall





Table 5: Nighttime Predicted Future Sound Levels [dBA], Without Mitigation

Building	Façade		ne - at Façade L _{EQ(8)}	Nighttime - at Façade Total
		Road	Rail	$L_{EQ(8)}$
	Northwest	74	< 50	74
Tower A	Northeast	71	55	71
37-Storey	Southeast	58	56	60
	Southwest	72	55	72
	Northwest	73	< 50	73
	Northeast	70	54	71
6 Stanay Dadiyan	Interior Southeast	66	54	66
6-Storey Podium	Interior Southwest	59	53	60
	Southeast	57	54	59
	Southwest	72	56	72
	Northwest	70	< 50	70
Tower B	Northeast	67	56	67
49-Storey	Southeast	57	60	62
	Southwest	70	57	70
	Northwest	69	< 50	69
6 Stanay Dadiyan	Northeast	67	52	67
6-Storey Podium	Southeast	56	59	61
	Southwest	70	57	70
	Northwest	70	< 50	70
Tower C	Northeast	68	59	69
65-Storey	Southeast	57	62	63
	Southwest	68	58	68
	Northwest	70	< 50	70
	Northeast	68	60	69
7 Ctamary Dading	Southeast	59	62	64
7-Storey Podium	Southwest	64	59	65
	Interior Northwest	65	< 50	65
	Interior Southwest	64	53	64





5 Traffic Noise Recommendations

The predictions indicate that traffic sound levels exceed MECP limits during daytime and nighttime hours at the proposed façades of the buildings. The following recommendations are provided.

5.1 Outdoor Living Areas

There are several outdoor amenity spaces indicated on the drawings located on the 7th floors of the podium for Towers A and C and on the 8th floors of the podium for Tower C. The predicted sound level on all of the common outdoor amenity terraces were predicted with a minimum 1.07 m high solid parapet wall.

The predicted sound level on the proposed terraces throughout the site range from 65 dBA to 68 dBA, well in excess of the MECP limit of 55 dBA. Acoustic barriers on these terraces would need to be: 3.2 m for the 7th floor terrace at Tower A; 3.4 m for the 7th floor terrace, and 3.0 m for the 8th floor terrace at Tower C to reduce sound levels to 59 dBA. Barriers exceeding 3 m are not considered feasible technically or economically for the project. Consideration could be given in detail design to integrating some smaller structures, screens or landscaping features to create quieter pockets or zones on this terrace. A unique warning clause is suggested below to advise tenants that noise levels on this terrace will be high.

As a general note, the wall component of the barrier should be of a solid construction with a surface density of no less than 20 kg/m². The walls may be constructed from a variety of materials such as wood, brick, pre-cast concrete or other concrete/wood composite systems or transparent materials provided that it is free of gaps or cracks within or below its extent.

The dwelling units may have balconies that are less than 4 m in depth. These balconies are not considered outdoor living areas and do not need to be assessed under MECP guidelines.







5.2 Indoor Living Areas and Ventilation Requirements

Central Air Conditioning

The predicted nighttime sound levels at the proposed buildings will exceed 65 dBA during the daytime hours and 60 dBA during the nighttime hours, and thus air conditioning systems are required so that windows may remain closed.

Window or through-the-wall air conditioning units (similar to motel style) are not recommended for any residential units because of the noise they produce and because the units penetrate through the exterior wall which degrades the overall noise insulating properties of the envelope. This can be achieved if the heating and cooling within each unit is housed in its own closet with an access door for maintenance. The location, installation and sound ratings of the outdoor air conditioning devices should minimize noise impacts and comply with criteria of MECP publication NPC-216.

5.3 Building Façade Constructions

Future sound levels at the proposed buildings with will exceed 65 dBA during the day and 60 dBA during the night due to road and rail traffic noise. MECP guidelines recommend that the windows, walls and doors be designed so that the indoor sound levels comply with MECP noise criteria.

Detailed glazing requirements for different facades and spaces could be considered in value engineering, if required, when detailed floor plans and building elevations are available.

Exterior Wall Constructions

The exterior walls of the proposed buildings may include precast/masonry panel portions, as well as spandrel glass panels within an aluminum window system. In this analysis, it has been assumed that sound transmitted through elements other than the glazing elements is negligible in comparison. For this assumption to be true, spandrel or metal panel sections must have an insulated drywall partition on separate framing behind.







Exterior Doors

There may be swing doors and some glazed sliding patio doors for entry onto the balconies from living/dining/bedrooms and some bedrooms. The glazing areas on the doors are to be counted as part of the total window glazing area. If exterior swing doors are to be used, they shall be insulated metal doors equipped with head, jamb and threshold weather seals.

Acoustical Requirements for Glazing

At the time of this report, detailed floor plans and elevations are under development. Assuming a typical window to floor area of 80% (60% fixed and 20% operable) for the living/dining rooms and bedrooms, the minimum acoustical requirement for the basic window glazing, including glass in fixed sections, swing or sliding doors, and operable windows, is provided in Table 6.





Table 6: Required Minimum Glazing STC Proposed Building

Building	Façade	Preliminary Glazing STC ^{1, 2}
	Northwest	STC-42
Tower A	Northeast	STC-39
37-Storeys	Southeast	STC-33
	Southwest	STC-40
	Northwest	STC-41
	Northeast	STC-39
6-Storey Podium	Interior Southeast	STC-35
0-Storey Fodium	Interior Southwest	STC-33
	Southeast	STC-33
	Southwest	STC-40
	Northwest	STC-38
Tower B	Northeast	STC-36
49-Storeys	Southeast	STC-34
•	Southwest	STC-39
	Northwest	STC-37
6 Staney Dading	Northeast	STC-36
6-Storey Podium	Southeast	STC-33
	Southwest	STC-39
	Northwest	STC-38
Tower C	Northeast	STC-38
65-Storeys	Southeast	STC-36
•	Southwest	STC-37
	Northwest	STC-38
	Northeast	STC-38
7 Storay Padium	Southeast	STC-36
7-Storey Podium	Southwest	STC-35
	Interior Northwest	STC-33
	Interior Southwest	STC-33

Note:

The northwest, northeast, and southwest façades of Tower A and the 6-storey podium below it, have significant STC requirements. It is suggested that the window to floor area ratios be minimized as much as possible along these façades. Sliding patio doors should not be included into bedrooms, swing doors are more suitable for suites with exposure to the QEW.







¹ Based on 80% window to floor area ratio for living/dining rooms and bedrooms.

² STC requirement refers to fixed glazing. Small leaks through operable doors and windows are assumed, however, tight weather seals should be provided to reduce such leakage to the extent feasible. OBC – Ontario Building Code

These calculations assume insignificant sound transmission through the walls in comparison with the windows. Exterior walls that are not glazed should have sufficient acoustical insulation value such that the noise transmitted through is negligible in comparison with the windows. These aspects can be verified as part of the detail design of the envelope, as needed.

Note that acoustic performance varies with manufacturer's construction details, and these are only guidelines to provide some indication of the type of glazing likely to be required. Acoustical test data for the selected assemblies should be requested from the suppliers, to ensure that the stated acoustic performance levels will be achieved by their assemblies.

Further Review

When detailed floor plans and building elevations are available for the buildings, the glazing requirements should be refined based on actual window to floor area ratios.

5.4 Warning Clauses

The guidelines recommend that warning clauses be included in the development agreements, purchase and tenancy agreements and offers of the purchase and sale for the dwelling units. These are provided below.

Suitable wording for future dwellings with minor sound level excesses is given below.

Type A:

Purchasers/tenants are advised that despite the inclusion of noise control features in the development and within the building units, sound levels due to increasing road and rail traffic may continue to be of concern, occasionally interfere with some activities of the dwelling occupants as the sound levels exceed the Municipality's and the Ministry of the Environment, Conservation and Parks' noise criteria.

Suggested wording for future dwellings requiring central air conditioning systems is given below.

Type B:

This dwelling unit has been supplied with a central air conditioning system which will allow windows and exterior doors to remain closed, thereby ensuring that the indoor sound levels are within the sound level limits of the Municipality and the Ministry of the Environment, Conservation and Parks.







These sample clauses are provided by the MECP as examples and can be modified by the Municipality as required.

Suggested wording for future dwellings where terraces cannot be sufficiently mitigated against traffic noise.

Type C:

Due to site constraints, an acoustical barrier to shield the outdoor amenity terrace from the road and rail traffic could not be accommodated. Noise levels on this terrace are expected to be well above the sound level limits of the Ministry of the Environment, Conservation and Parks.

CN requires a standard warning clause as this development is located near a principal mainline. The following sample clause is typical of those included in agreements of purchase and sale or lease on the Lands that are within 300 meters of the railway right-of-way.

Type D:

Warning: Canadian National Railway Company or its assigns or successors in interest has or have a rights-of-way within 300 metres from the land the subject hereof. There may be alterations to or expansions of the railway facilities on such rights-of-way in the future including the possibility that the railway or its assigns or successors as aforesaid may expand its operations, which expansion may affect the living environment of the residents in the vicinity, notwithstanding the inclusion of any noise and vibration attenuating measures in the design of the development and individual dwelling(s). CNR will not be responsible for any complaints or claims arising from use of such facilities and/or operations on, over or under the aforesaid rights-of-way.

GO Transit's standard warning clause for residential developments located within 300 m of a railway right-of-way (principal main line) is given below.

Type E:

Warning: Metrolinx and its assigns and successors in interest has or have a right-of-way within 300 metres from the land the subject hereof. There may be alterations to or expansions of the rail facilities on such right-of- way in the future including the possibility that Metrolinx or any railway entering into an agreement with Metrolinx to use the right-of-way or their assigns or successors as aforesaid may expand their operations, which expansion may affect the living environment of the residents in the vicinity, notwithstanding the inclusion of any noise and vibration attenuating measures in the design of the development and individual dwelling(s). Metrolinx will not be responsible for any complaints or claims arising from use of such facilities and/or operations on, over or under the aforesaid right-of-way.







5.5 Impact of the Development on Itself

Section 5.8.1.1 of the Ontario Building Code (OBC), released on January 1, 2020, specifies the minimum required sound insulation characteristics for demising partitions, in terms of Sound Transmission Class (STC) or Apparent Sound Transmission Class (ASTC) values. In order to maintain adequate acoustical privacy between separate suites in a multi-tenant building, inter-suite walls must meet or exceed STC-50 or ASTC-47. Suite separation from a refuse chute or elevator shaft must meet or exceed STC-55. In addition, it is recommended that the floor/ceiling constructions separating suites from any amenity or commercial spaces also meet or exceed STC-55. Tables 1 and 2 in Section SB-3 of the Supplementary Guideline to the OBC provide a comprehensive list of constructions that will meet the above requirements.

Tarion's Builder Bulletin B19R requires the internal design of condominium projects to integrate suitable acoustic features to insulate the suites from noise from each other and amenities in accordance with the OBC, and limit the potential intrusions of mechanical and electrical services of the buildings on its residents. If B19R certification is needed, an acoustical consultant is required to review the mechanical and electrical drawings and details of demising construction and mechanical/electrical equipment, when available, to help ensure that the noise impact of the development on itself is maintained within acceptable levels.

5.6 Impact of the Development on the Environment

Sound levels from noise sources such as rooftop air-conditioners, cooling towers, exhaust fans, etc. should not exceed the minimum one-hour L_{EQ} ambient (background) sound level from road traffic, at any potentially impacted residential point of reception. Based on the levels observed during our site visit, the typical minimum ambient sound levels in the area are expected to be 50 dBA or more during the day and 45 dBA or more at night. Thus, any electro-mechanical equipment associated with this development (e.g. emergency generator testing, fresh-air handling equipment, etc.) should be designed such that they do not result in noise impact beyond these ranges.







6 Assessment of Stationary Sources of Sound at the Proposed Residential Units

6.1 Noise Source Description

There are existing commercial facilities surrounding the site including: Holiday Inn Oakville and the Animal Hospital of Oakville to the north; All Fix Automotive, Grandeur Motors, KidLogic, a car wash and various commercial facilities to the west; among other commercial buildings to the northeast; the Oakville GO Station and Avis Car Rental to the south.

The rooftop mechanical equipment (air conditioning units), automotive repair shops bay doors, car wash bays, are potentially significant stationary sources of sound. A site visit was conducted in January 2022 to investigate the acoustical environment. Sensitive receptor locations were taken at the façades of the proposed buildings.

At the Oakville GO Station, when trains were operated in reverse and when the train is about to leave the station, a warning bell is operated. Communications with GO transit staff indicate that these bells are safety devices used for warning purposes only, and are thus exempt from noise assessment under MECP guidelines. Other occasional noises emitted from this station (such as occasional announcements over the outdoor PA system) are not anticipated to be an issue.

6.2 Criteria for Acceptable Sound Levels

6.2.1 Stationary Noise Criteria

Under MECP guidelines, the acoustical environment in this area is classified as "urban" or "Class I", as background sound levels are set by significant volumes of road traffic on surrounding roadways during daytime and nighttime hours.

Stationary sources of sound are collectively defined as all sources that emit sound within a commercial or industrial facility boundary. The facilities to the north, northwest and west are therefore classified as a stationary sources of sound.







MECP Guideline NPC-300 is the applicable guideline for use in investigating Land Use Compatibility issues with regard to noise. A commercial facility is classified in NPC-300 as a stationary source of sound (as compared to sources such as traffic or construction, for example) for noise assessment purposes. A stationary noise source encompasses the noise from all the activities and equipment within the property boundary of a facility including regular on-site truck traffic for deliveries, material handling and mechanical equipment. In terms of background sound, the development is located in an urban acoustical environment which is characterized by an acoustical environment dominated by road traffic and human activity.

Stationary Source (Steady Sound)

NPC-300 is intended for use in the planning of both residential and commercial/industrial land uses and provides the acceptability limits for sound due to commercial operations in that regard. The facade of a residence (i.e., in the plane of a window), or any associated usable outdoor area is considered a sensitive point of reception (within 30 m of a dwelling façade). NPC-300 stipulates that the exclusionary sound level limit for a stationary noise source in urban Class 1 and 2 areas are taken to be 50 dBA during daytime and evening hours (07:00 to 19:00 and 19:00 to 23:00), and 45 dBA during nighttime hours (23:00 to 07:00) at the plane of the windows of noise sensitive spaces. If the background sound levels due to road traffic exceed the exclusionary limits, then that background sound level becomes the criterion. The background sound level is defined as the sound level that occurs when the source under consideration is not operating, and may include traffic noise and natural sounds.

Commercial activities such as the occasional movement of customer/employee vehicles, deliveries to conveniences stores and restaurants and garbage collection are not of themselves considered to be significant noise sources in the MECP guidelines. Accordingly, these sources have not been considered in this study.

Hourly daytime traffic data was obtained for the QEW from the MTO and for Trafalgar Road from the Region of Halton. Hourly daytime traffic data was not available for Cross Avenue. Using the current traffic volumes obtained from the Town, the traffic data was applied to a generic 24 hour traffic pattern developed by the US Department of Transportation, Federal Highways Administration contained in the report titled "Summary of National and Regional Travel Trends 1970 – 1995" dated







May 1996. The traffic volumes were then used to predict sound levels at the residential receptors during the day/nighttime hours to determine the minimum hour background sound levels at those locations due to the traffic on the public roadways.

The minimum hour traffic volumes used in the analysis are summarized in the following table.

Table 7: Minimum Hourly Traffic Volumes on Surrounding Roadways

Doodryon	Hour	ly Data	Commercial
Roadway	Day	Night	Vehicle %
QEW	3 921	922	14
Trafalgar Rd	1 099	59	2.7
Cross Ave	395	91	5.4

The predicted quietest daytime hour and nighttime hour sound levels at the facades of the proposed residences, which will be exposed to the commercial facilities are found to be higher than the MECP exclusionary limits in the daytime hours for the majority of facades with exposure to the QEW and Cross Avenue. As such, the sound level limits as summarized in Table 8 are therefore used in the following sections of this report as the applicable criteria for each façade of the proposed residential buildings.





Table 8: Applicable Sound Level Limits, LEQ (dBA) for Class I Areas

		Sound Le	evel Limits
Building	Façade	Daytime (07:00 to 23:00)	Nighttime (23:00 to 07:00)
	Northwest	68	61
Tower A	Northeast	62	56
37-Storeys	Southeast	50	45
	Southwest	65	58
	Northwest	67	60
	Northeast	65	58
6 Stanay	Interior Southeast	51	45
6-Storey Podium	Interior Southwest	50	45
roululli	Southeast	50	45
	Southwest	63	57
	7th Floor OLA	57*	
	Northwest	64	57
Tower B	Northeast	61	55
49-Storeys	Southeast	52	45
	Southwest	63	56
	Northwest	61	54
6-Storey	Northeast	60	54
Podium	Southeast	54	49
	Southwest	62	55
	Northwest	63	56
Tower C	Northeast	60	54
65-Storeys	Southeast	52	45
	Southwest	56	49
	Northwest	64	57
	Northeast	59	52
	Southeast	58	51
7-Storey	Southwest	57	51
Podium	Interior Northwest	55	49
	Interior Southwest	54	48
	7 th Floor North	59*	
	8 ^h Floor OLA	59*	1

Note: *With a minimum 1.07 m solid parapet wall

Compliance with MECP criteria generally results in acceptable levels of sound at residential receptors although there may be residual audibility during periods of low background sound.







6.3 Stationary Source Assessment

Predictive noise modelling was used to assess the potential sound impact of the nearby land uses at the closest sensitive receptors. The noise prediction model was based on sound emission levels for the nearby noise sources, assumed operational profiles (during the day and night), and established engineering methods for the prediction of outdoor sound propagation. These methods include the effects of distance, air absorption, and acoustical screening by barrier obstacles.

Sound emission data for the rooftop equipment was obtained from HGC Engineering project files for typical commercial facilities. The source levels associated used in the analysis is listed in Table 11 below.

Table 11: Source Sound Power Levels [dB re 10-12 W]

Source	Octave Band Centre Frequency [Hz]							
Source		125	250	500	1k	2k	4k	8k
Exhaust Fan	84	88	86	85	80	80	76	74
Car Wash Bay	85	76	75	77	76	79	81	83
Vacuum	86	74	87	82	84	89	90	88
Condenser Fans	84	79	78	77	76	70	63	59
Tractor Trailer Acceleration	101	100	94	96	97	95	91	86
Medium Truck Acceleration	108	90	92	90	94	91	84	77
Medium Truck Reefer	82	77	78	67	67	64	58	50
Medium Truck Idle	72	68	70	65	72	69	60	52
Restaurant Exhaust Fan	86	74	87	82	84	89	90	88
Lennox KG060 (A-Weighted)		67	72	77	76	73	68	61
Lennox KG120 (A-Weighted)		76	79	84	83	79	73	66
Lennox KG150 (A-Weighted)		77	80	85	84	79	74	66
Lennox KG240 (A-Weighted)		79	84	88	89	85	82	73
Cooling Tower	95	91	86	86	84	85	86	85

The above outlined sound levels and site features were used as input to a predictive computer model. The software used for this purpose (*Cadna-A Version 2023 MR 1 build: 197.5343*) is a computer implementation of ISO Standard 9613-2.2 "Acoustics - Attenuation of Sound During Propagation Outdoors." The ISO method accounts for reduction in sound level with distance due to geometrical spreading, air absorption, ground attenuation and acoustical shielding by intervening structures such as barriers.







The following information and assumptions were used in the analysis.

<u>Commercial Buildings</u>

- The rooftop units were assumed to be located as shown in Figure 4. The majority of rooftop units were assumed to be 1 m to 2.5 m tall with the exception of the condenser fans which were 4.0 m in height.
- Lines indicate truck movements.
- Typical hours of operation for the majority of the commercial buildings are daytime only (07:00 to 23:00).

Receptors

• Façades of proposed residential development.

Assumed daytime worst-case scenario:

- All rooftop HVAC equipment operating for 60 minutes in an hour;
- All car wash bays (coin operated) operating for 30 minutes each;
- All vacuums operating for 15 minutes each at the car wash;

Assumed night-time worst-case scenario:

- All rooftop HVAC equipment operating for 30 minutes in an hour;
- All car wash bays (coin operated) operating for 10 minutes each;
- All vacuums operating for 10 minutes each at the car wash;

6.4 Results

The calculations consider the acoustical effects of distance and shielding by the buildings. The sound levels due to the rooftop mechanical equipment at the façades of the proposed buildings are summarized in the following table and Figures 5 and 6.







Table 12: Predicted Stationary Source Sound Levels at the Proposed Residential Buildings [dBA]

Building	Façade	Criteria Day/Night	Daytime	Nighttime
	Northwest	68 / 61	48	45
Tower A	Northeast	62 / 56	42	38
37-Storeys	Southeast	50 / 45	50	45
	Southwest	65 / 58	50	47
	Northwest	67 / 60	45	42
	Northeast	65 / 58	42	39
6 Chamas	Interior Southeast	51 / 45	42	36
6-Storey Podium	Interior Southwest	50 / 45	45	33
Fouluili	Southeast	50 / 45	49	45
	Southwest	63 / 57	51	47
	7th Floor OLA	57* /	40*	
	Northwest	64 / 57	47	44
Tower B	Northeast	61 / 55	45	36
49-Storeys	Southeast	52 / 45	48	42
	Southwest	63 / 56	53	47
	Northwest	61 / 54	47	44
6-Storey	Northeast	60 / 54	38	35
Podium	Southeast	54 / 49	49	44
	Southwest	62 / 55	51	47
	Northwest	63 / 56	50	39
Tower C	Northeast	60 / 54	51	41
65-Storeys	Southeast	52 / 45	42	39
,	Southwest	56 / 49	45	41
	Northwest	64 / 57	44	39
	Northeast	59 / 52	53	41
	Southeast	58 / 51	43	40
7-Storey	Southwest	57 / 51	49	45
Podium	Interior Northwest	55 / 49	46	42
	Interior Southwest	54 / 48	41	37
	7 th Floor OLA	59* /	36*	
	8 th Floor OLA	59* /	39*	

Note: *With a minimum 1.07 m solid parapet wall

The results of this analysis indicate that the predicted steady sound levels due to the surrounding commercial facilities are expected to be below the relevant MECP criteria considering a worst-case operational scenario.

A warning clause should be included in purchase and tenancy agreements to inform future occupants of the existing commercial facilities. Suggested wording is included below:







Type F:

Purchasers/tenants are advised that due to the proximity of nearby commercial facilities, sound from those facilities may at times be audible.

7 Summary and Recommendations

The following recommendations are provided with regard to noise control. Please refer to previous sections of this report where these recommendations are discussed in more detail.

- 1. Central air conditioning is required for all of the proposed buildings.
- 2. Upgraded building constructions are required for the façades of the proposed buildings as indicated in Section 5.3.
- 3. Warning clauses should be included in the property and tenancy agreements and offers of purchase and sale to inform the future owners/residents of the presence of the roadways and railway and the nearby commercial operations.
- 4. When detailed drawings are available, at SPA or as a condition, a detailed noise study should be conducted to refine the glazing constructions based on actual window to floor area ratios. It is suggested that the window to floor area ratios be minimized as much as possible along the façades with exposure to the QEW. Sliding patio doors should not be included into bedrooms, swing doors are more suitable for suites with exposure to the QEW.
- 5. Tarion's Builder Bulletin (B19R) requires that the internal design of condominium projects integrates suitable acoustic features to insulate the suites from noise from each other and amenities in accordance with the OBC, and limit the potential intrusions of mechanical and electrical services of the buildings on its residents. If B19R certification is needed, an acoustical consultant is required to review the mechanical and electrical drawings and details of demising constructions and mechanical/electrical equipment, when available, to help ensure that the noise impact of the development on itself are maintained within acceptable levels. Outdoor sound emissions should also be checked to ensure compliance with the Town's by-law.







8 Conclusions

Based on the assessment presented herein, the conceptual development proposal is considered to be feasible from a noise impact perspective. Preliminary noise modelling of the nearby existing commercial facilities indicates results to be within criteria at residential facades. Detailed noise studies are recommended for each building as the development proposal proceeds.





Limitations

This document was prepared solely for the addressed party and titled project or named part thereof, and should not be relied upon or used for any other project without obtaining prior written authorization from HGC Engineering. HGC Engineering accepts no responsibility or liability for any consequence of this document being used for a purpose other than for which it was commissioned. Any person or party using or relying on the document for such other purpose agrees, and will by such use or reliance be taken to confirm their agreement to indemnify HGC Engineering for all loss or damage resulting therefrom. HGC Engineering accepts no responsibility or liability for this document to any person or party other than the party by whom it was commissioned.

Any conclusions and/or recommendations herein reflect the judgment of HGC Engineering based on information available at the time of preparation, and were developed in good faith on information provided by others, as noted in the report, which has been assumed to be factual and accurate. Changed conditions or information occurring or becoming known after the date of this report could affect the results and conclusions presented.







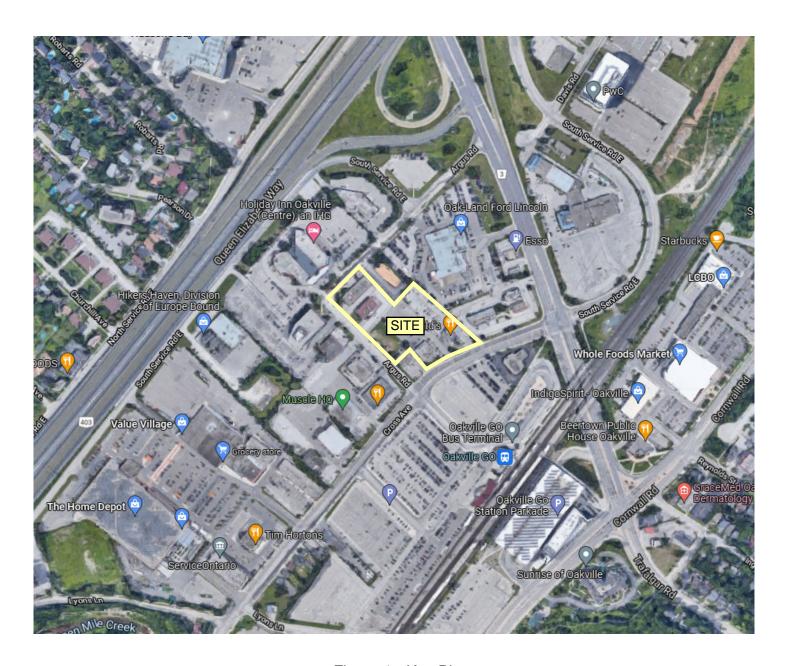


Figure 1 - Key Plan







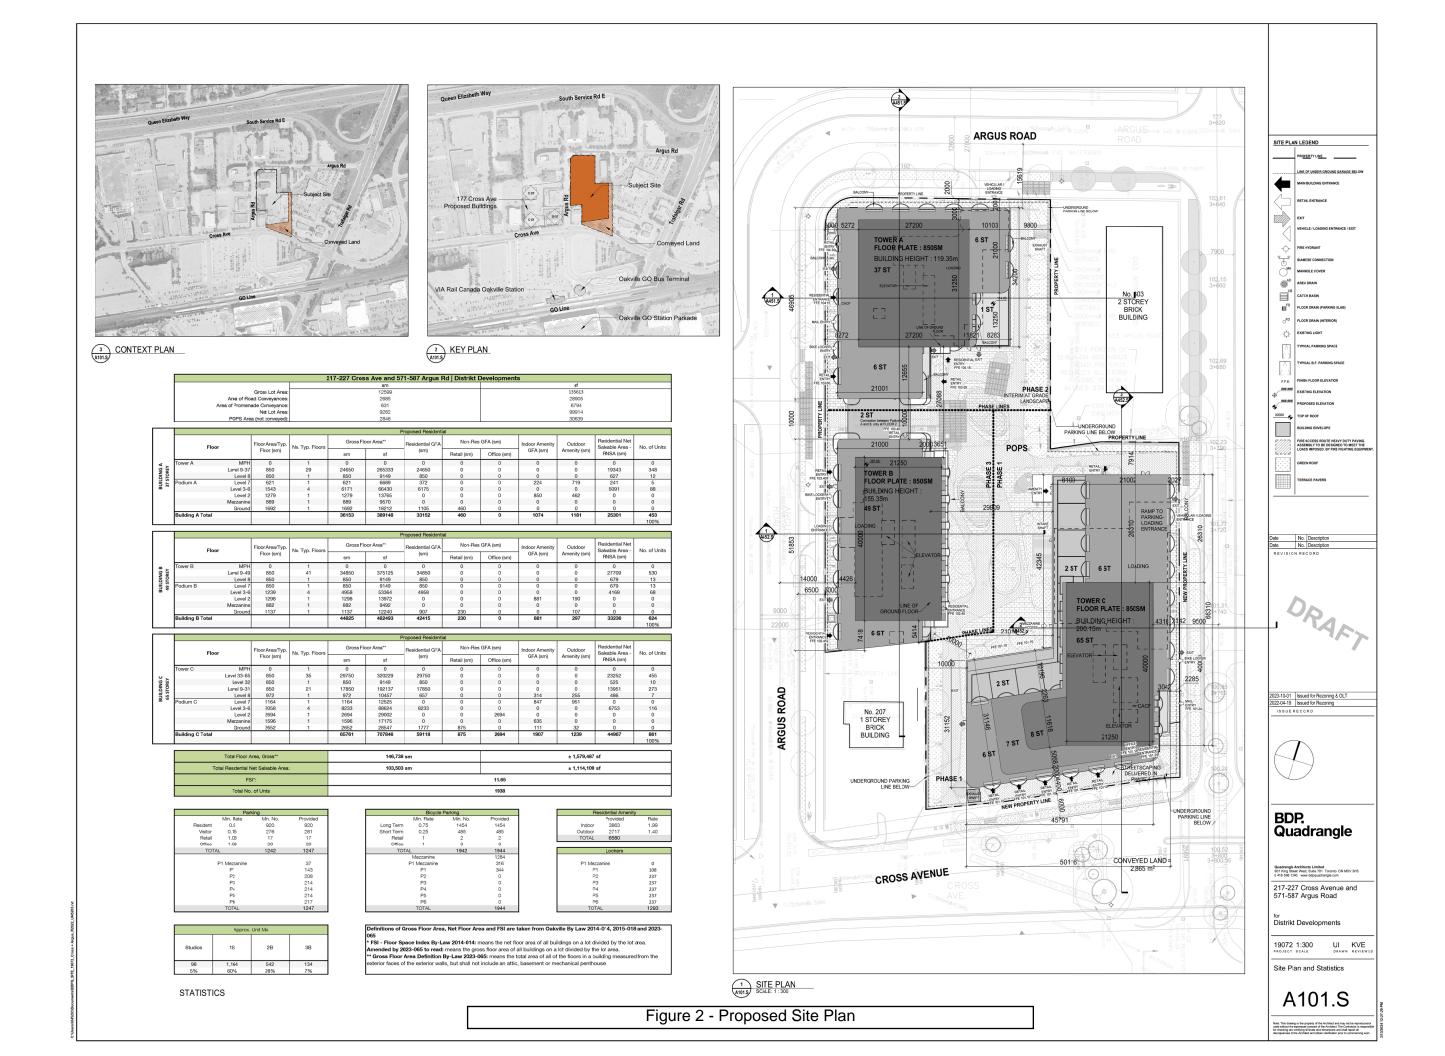




Figure 3 - Aerial Photo Showing Surrounding Land Uses







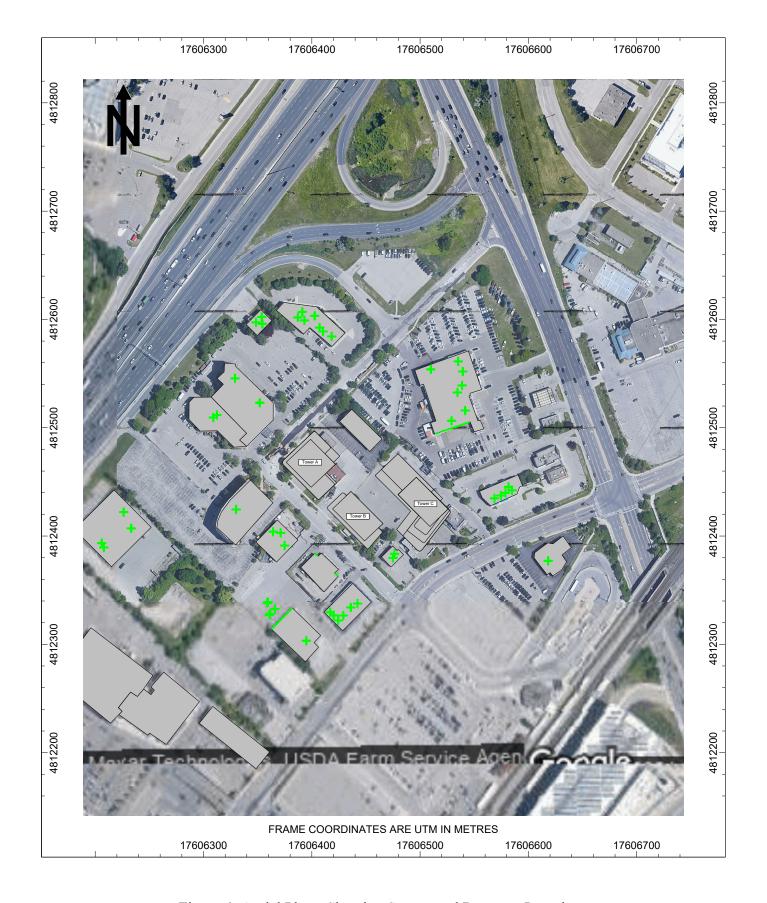


Figure 4: Aerial Photo Showing Source and Receptor Locations







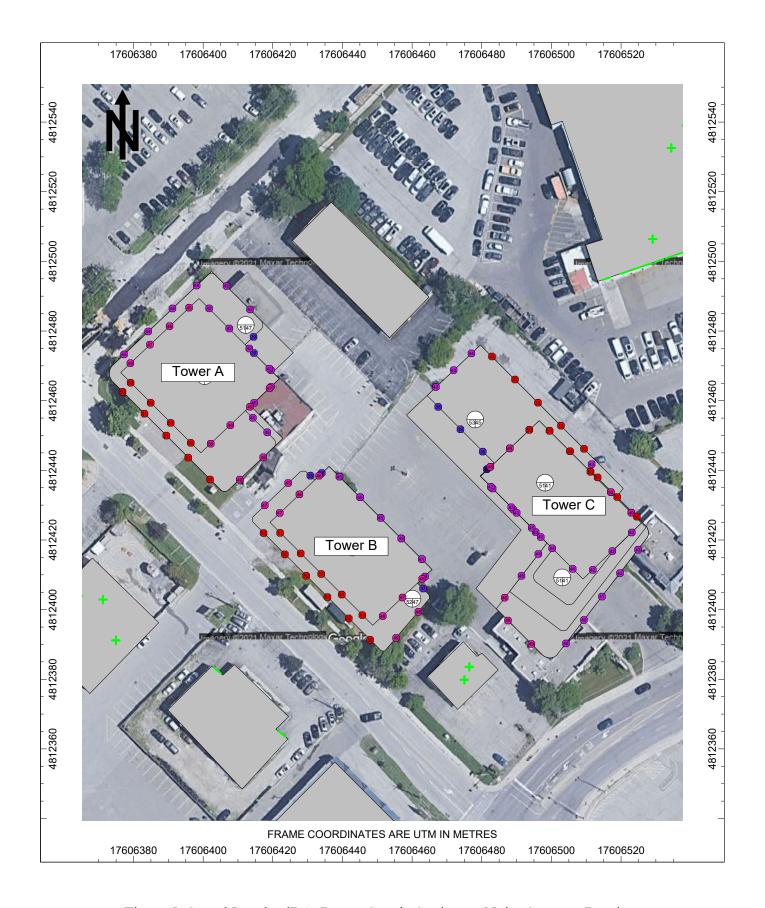


Figure 5: Sound Levels, dBA, Due to Steady Stationary Noise Sources, Daytime







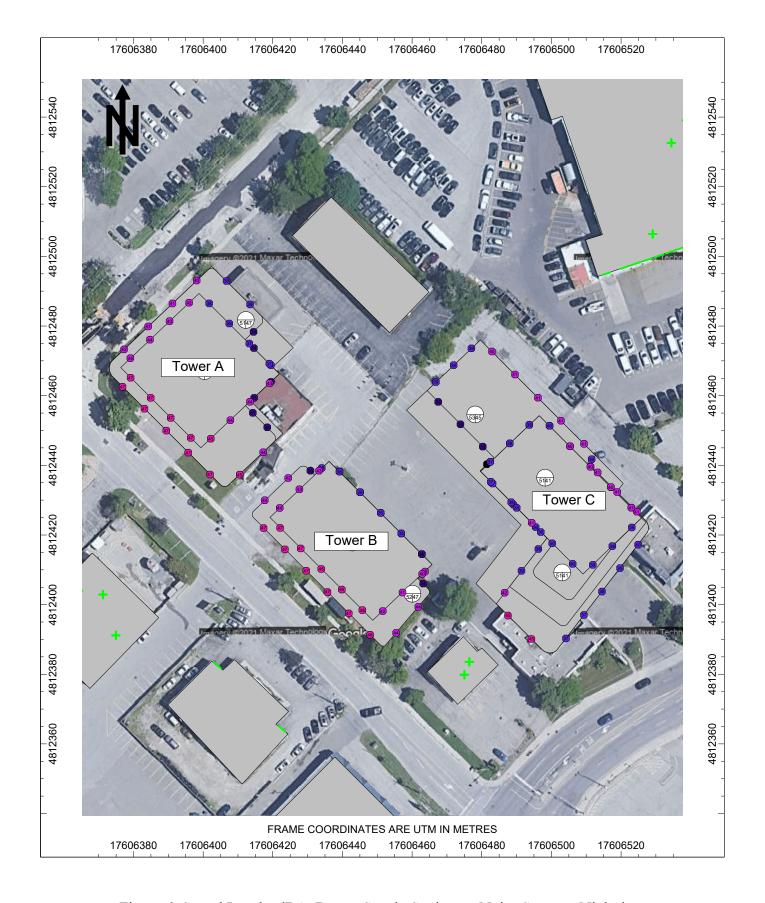


Figure 6: Sound Levels, dBA, Due to Steady Stationary Noise Sources, Nighttime







APPENDIX A

Road Traffic Data







		Dist		Dattara				
Himburan	Location Recognition		Vaan	Pattern	AADT	SADT	SAWDT	WADT
Highway QEW	Location Description	(KM)	Year 2013	Type C	AADT 187000	206100	203500	WADT 168300
QEW			2013	C	206000	226600	220400	185400
QEW			2014	C	210000	231000	224700	189000
QEW			2015	C	215000	236500	230000	193500
QEW			2010	С	205500	224800	224300	186500
QEW			2017	C	208900	229000	227700	188500
QEW			2018	C	212300	232100	230700	192200
QEW	TRAFALGAR RD IC-118	1.4	1988	C	111500	123800	123800	100400
QEW	TRAFALGAR RD IC-118	1.4	1989	C	115300	128000	129100	103800
QEW			1990	C	120100	133300	133300	103800
QEW			1991	C	121300	133400	134600	110400
QEW			1992	C	123300	133400	136900	113400
QEW			1993	C	129500	141200	143300	119100
QEW			1994	C	130800	143200	145800	119100
QEW			1994	C	133800	145200	149900	122400
QEW			1995	C	136800	155100	155600	123500
QEW			1996	C	139800	158000	159400	125800
QEW			1997	C	142700	161300	161300	128400
			1998					
QEW QEW			2000	C C	143400 146500	160600 165500	162000 165500	129100 131800
			~~~~~~~~~~~~~~~~~	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	168900	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~
QEW			2001	C C	149700 152800	168600	172400	134800 137500
QEW			2002	************		171100	******************************	
QEW QEW		~~~	2003 2004	C	156000 158100	174300 178100	175400 178400	140800 142400
<del>-</del>			2004	C	160800		180500	
QEW QEW			2005	C	163500	179000		144400 147100
QEW			2006			181700 184700	183100 187200	
			2007	C C	166200			149300
QEW QEW		~~~	2008	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	168900	186400	183800 190500	151500 154400
QEW			2009	C C	171600 174300	188800 192100	190500	154400
~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~				C	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~			
QEW			2011		177000	195100	196800	159300
QEW			2012	С	179700	198000	193800	161800
QEW			2013	С	195000	214900	212200	175500 180000
QEW			2014	C	200000	220000	214000	*************************
QEW			2015 2016	C C	210000 215000	231000 236500	224700 230000	189000 193500
QEW		enenena annenenenenenenenenenenenen		~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	
QEW			2017	С	205000	224300	223800	186000
QEW			2018	C	208500	228500	227200	188200
QEW	DOVAL MINIDSOR DR (MRL) IC 110	2.1			211900	231600	230200	191800
QEW	ROYAL WINDSOR DR (WBL) IC 119	3.1	1988	C	96000	106600	106600	86400
QEW			1989	С	99300	110200	111200	89400
QEW			1990	C	103200	114600	114600	92900
QEW			1991	С	103900	114300	115300	94500
QEW			1992	C	105400	113800	117000	97000
QEW			1993	С	106000	115500	117300	97500

1988-2019 Traffic Volumes Pub lication Page 33 of 1229

Highway QEW	Direction	FORT ERIE	Description	WEST OF R	Highway	QEW	Direction	TORONTO	Description
VDS Statior LHRS	os	VDS Station	LHRS	OS	Date	Time	VDS1 Volur	VDS2 Volur	Total Volun
QEWDE028 101	135 0.7	QEWDE028	10135	0.7	05/08/2019	1:00	1393	980	2373
QEWDE028 101	135 0.7	QEWDE028	10135	0.7	05/08/2019	2:00	779	629	1408
QEWDE028 101	135 0.7	QEWDE028	10135	0.7	05/08/2019	3:00	635	546	1181
QEWDE028 101	135 0.7	QEWDE028	10135	0.7	05/08/2019	4:00	991	661	1652
QEWDE028 101	135 0.7	QEWDE028	10135	0.7	05/08/2019	5:00	825	1552	2377
QEWDE028 101	135 0.7	QEWDE028	10135	0.7	05/08/2019	6:00	1924	5898	7822
QEWDE028 101	135 0.7	QEWDE028	10135	0.7	05/08/2019	7:00	4837	7597	12434
QEWDE028 101	135 0.7	QEWDE028			05/08/2019			7750	14123
QEWDE028 101	135 0.7	QEWDE028	10135	0.7	05/08/2019	9:00	5980	7466	13446
QEWDE028 101		QEWDE028		0.7	05/08/2019	10:00	6466	6269	12735
QEWDE028 101	135 0.7	QEWDE028	10135	0.7	05/08/2019	11:00	5989	6433	12422
QEWDE028 101	135 0.7	QEWDE028	10135	0.7	05/08/2019	12:00	6066	6798	12864
QEWDE028 101	135 0.7	QEWDE028	10135	0.7	05/08/2019	13:00	6374	6347	12721
QEWDE028 101	135 0.7	QEWDE028	10135	0.7	05/08/2019	14:00	6383	6487	12870
QEWDE028 101	135 0.7	QEWDE028	10135	0.7	05/08/2019	15:00	6307	6662	12969
QEWDE028 101		QEWDE028		0.7	05/08/2019		5659	7046	12705
QEWDE028 101	135 0.7	QEWDE028	10135		05/08/2019		6180	7186	13366
QEWDE028 101	135 0.7	QEWDE028	10135		05/08/2019		6806	7166	13972
QEWDE028 101	135 0.7	QEWDE028			05/08/2019		7014	6598	13612
QEWDE028 101		QEWDE028			05/08/2019			5460	11793
QEWDE028 101	135 0.7	QEWDE028	10135		05/08/2019		4817	4486	9303
QEWDE028 101		QEWDE028			05/08/2019			3922	8192
QEWDE028 101		QEWDE028			05/08/2019		3488	3048	6536
QEWDE028 101		QEWDE028			05/08/2019		2386	1795	4181
QEWDE028 101		QEWDE028			05/09/2019		1463	1006	2469
QEWDE028 101		QEWDE028			05/09/2019		839	726	1565
QEWDE028 101		QEWDE028			05/09/2019			574	1220
QEWDE028 101		QEWDE028			05/09/2019			706	1715
QEWDE028 101		QEWDE028			05/09/2019			1528	2341
QEWDE028 101	135 0.7	QEWDE028	10135		05/09/2019			5913	7733
QEWDE028 101	135 0.7	QEWDE028	10135		05/09/2019		4817	7672	12489
QEWDE028 101		QEWDE028			05/09/2019		6599	8013	14612
QEWDE028 101		QEWDE028			05/09/2019		6522	7594	14116
QEWDE028 101		QEWDE028			05/09/2019		6167	6693	12860
QEWDE028 101		QEWDE028			05/09/2019			6596	12526
QEWDE028 101	135 0.7	QEWDE028	10135	0.7	05/09/2019	12:00		6646	12939
QEWDE028 101		QEWDE028		0.7	05/09/2019		6298	6515	12813
QEWDE028 101	135 0.7	QEWDE028	10135		05/09/2019		6498	6509	13007
QEWDE028 101		QEWDE028			05/09/2019			6784	13317
QEWDE028 101	135 0.7	QEWDE028	10135		05/09/2019		6016	7231	13247
QEWDE028 101	135 0.7	QEWDE028		0.7	05/09/2019	17:00		7056	13128
QEWDE028 101		QEWDE028		0.7	05/09/2019			6540	12532
QEWDE028 101		QEWDE028			05/09/2019		6312	6102	12414
QEWDE028 101		QEWDE028			05/09/2019		6158	4986	11144
QEWDE028 101		QEWDE028			05/09/2019			4071	8905
QEWDE028 101		QEWDE028			05/09/2019			3641	7904
QEWDE028 101		QEWDE028			05/09/2019			2885	6399
QEWDE028 101		QEWDE028			05/09/2019			1988	4592
QEWDE028 101		QEWDE028			05/10/2019			1114	2683
QEWDE028 101		QEWDE028			05/10/2019			765	1664
_		_			•				

QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/10/2019	3:00	772	662	1434
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/10/2019	4:00	944	759	1703
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/10/2019	5:00	855	1429	2284
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/10/2019	6:00	1762	5332	7094
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/10/2019	7:00	4201	6950	11151
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/10/2019	8:00	6309	7534	13843
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/10/2019	9:00	5770	7404	13174
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/10/2019	10:00	6345	6360	12705
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/10/2019	11:00	6233	6860	13093
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/10/2019	12:00	6543	6908	13451
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/10/2019	13:00	6773	7295	14068
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/10/2019	14:00	6612	7050	13662
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/10/2019	15:00	6774	7364	14138
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/10/2019	16:00	6379	7588	13967
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/10/2019	17:00	6797	7336	14133
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/10/2019	18:00	7107	7193	14300
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/10/2019	19:00	7263	6637	13900
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/10/2019	20:00	6735	6032	12767
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/10/2019	21:00	5423	4916	10339
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/10/2019	22:00	4665	3900	8565
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/10/2019	23:00	3920	3391	7311
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/10/2019	23:59	3485	2519	6004
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/11/2019	1:00	2658	1655	4313
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/11/2019	2:00	1323	1050	2373
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/11/2019	3:00	927	781	1708
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/11/2019	4:00	702	675	1377
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/11/2019	5:00	599	766	1365
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/11/201!	6:00	919	1649	2568
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/11/2019	7:00	2120	2620	4740
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/11/201!	8:00	3716	3828	7544
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/11/2019	9:00	5592	5159	10751
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/11/2019	10:00	7124	6334	13458
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/11/2019	11:00	7061	7014	14075
							7559	14626
QEWDE028	10135 10135	0.7 QEWDE028	10135 10135	0.7 05/11/201! 0.7 05/11/201!	12:00	7067 6709	7339 7419	14128
QEWDE028		0.7 QEWDE028			13:00			
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/11/2019	14:00	7021	7600 7305	14621
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/11/2019	15:00	7252	7395	14647
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/11/2019	16:00	7164	7321	14485
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/11/2019	17:00	7255	7377	14632
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/11/2019	18:00	7060	7463	14523
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/11/2019	19:00	6558	7506	14064
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/11/2019	20:00	6232	6254	12486
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/11/2019	21:00	5250	5209	10459
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/11/2019	22:00	4719	4662	9381
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/11/2019	23:00	4187	4206	8393
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/11/2019	23:59	3526	3199	6725
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/12/2019	1:00	2487	2081	4568
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/12/2019	2:00	1593	1346	2939
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/12/2019	3:00	1055	812	1867
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/12/2019	4:00	616	660	1276
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/12/2019	5:00	466	596	1062
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/12/2019	6:00	622	1094	1716

QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/12/2019	7:00	1146	1652	2798
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/12/2019	8:00	2013	1908	3921
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/12/2019	9:00	2988	2751	5739
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/12/2019	10:00	4379	4500	8879
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/12/2019	11:00	5841	6042	11883
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/12/2019	12:00	6811	7056	13867
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/12/2019	13:00	6925	7194	14119
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/12/2019	14:00	6747	7024	13771
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/12/2019	15:00	6520	6847	13367
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/12/2019	16:00	6327	6524	12851
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/12/2019	17:00	6537	6669	13206
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/12/2019	18:00	6222	6545	12767
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/12/2019	19:00	6169	6622	12791
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/12/2019	20:00	5891	6198	12089
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/12/2019	21:00	4871	5292	10163
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/12/2019	22:00	3646	3758	7404
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/12/2019	23:00	3776	3427	7203
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/12/2019	23:59	2059	2001	4060
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/13/2019	1:00	1087	904	1991
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/13/2019	2:00	591	551	1142
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/13/2019	3:00	430	492	922
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/13/2019	4:00	441	633	1074
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/13/2019	5:00	707	1503	2210
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/13/2019	6:00	1891	5725	7616
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/13/2019	7:00	4375	7080	11455
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/13/2019	8:00	6071	7191	13262
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/13/2019	9:00	5743	6977	12720
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/13/2019	10:00	5739	6008	11747
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/13/2019	11:00	5549	5764	11313
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/13/2019	12:00	5689	6173	11862
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/13/2019	13:00	5989	6087	12076
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/13/2019	14:00	5948	6060	12008
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/13/2019	15:00	6068	6051	12119
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/13/2019	16:00	6048	6791	12839
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/13/2019	17:00	6347	6989	13336
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/13/2019	18:00	6604	6847	13451
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/13/2019	19:00	6316	5472	11788
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/13/2019	20:00	5718	4666	10384
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/13/2019	21:00	4215	3749	7964
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/13/2019	22:00	3423	3226	6649
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/13/2019	23:00	2740	2356	5096
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/13/2019	23:59	1989	1727	3716
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/14/2019	1:00	1252	919	2171
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/14/2019	2:00	660	631	1291
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/14/2019	3:00	581	513	1094
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/14/2019	4:00	928	609	1537
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/14/2019	5:00	831	1511	2342
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/14/2019	6:00	1972	5743	7715
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/14/2019	7:00	4645	7425	12070
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/14/2019	8:00	6506	7471	13977
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/14/2019	9:00	5412	7288	12700
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/14/2019	10:00	6040	6360	12400

QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/14/2019	11:00	5921	6774	12695
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/14/2019	12:00	6170	6527	12697
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/14/2019	13:00	6242	6266	12508
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/14/2019	14:00	6482	6368	12850
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/14/2019	15:00	6652	6623	13275
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/14/2019	16:00	6124	7126	13250
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/14/2019	17:00	6667	7626	14293
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/14/2019	18:00	7009	7364	14373
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/14/2019	19:00	7159	5855	13014
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/14/2019	20:00	5958	5044	11002
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/14/2019	21:00	4546	4324	8870
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/14/2019	22:00	4171	3757	7928
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/14/2019	23:00	3161	2746	5907
QEWDE028	10135	0.7 QEWDE028	10135	0.7 05/14/2019	23:59	2318	1806	4124

Victor Garcia

From: Bee, Christopher (MTO) < Christopher.Bee@ontario.ca>

Sent: February 17, 2021 2:24 PM

To: Victor Garcia

Cc: Bee, Christopher (MTO)

Subject: RE: Commercial Vehicle % for QEW at Trafalgar Rd

To Victor Garcia, HGC Engineering

This location's major intersection is QEW and Trafalgar Road.

The % commercial vehicle at QEW near Trafalgar was 14% steady every year from 2007 to 2016 (10 yrs). 2016 is the latest year of official MTO data.

"% commercial" includes large long trucks, small short trucks, vans, cars with trailer, buses, and specials, but DOES NOT INCLUDE REGULAR CARS.

There is no further breakdown details within these classes.

Christopher Bee

MTO Central Region Traffic Office

Safety Traffic Information and Roadwork Coordination Section (STIRCS)

From: Victor Garcia <vgarcia@hgcengineering.com>

Sent: February-16-21 11:41 AM

To: Bee, Christopher (MTO) < Christopher.Bee@ontario.ca> **Subject:** Commercial Vehicle % for QEW at Trafalgar Rd

CAUTION -- EXTERNAL E-MAIL - Do not click links or open attachments unless you recognize the sender.

Good morning,

HGC Engineering is conducting a noise feasibility study for a proposed residential development located at 157 – 165 Cross Avenue in Oakville, Ontario. A google link is included for your reference:

https://goo.gl/maps/7G5T3Uj5vL8GTjAc6

Do you have commercial vehicle percentages available for the QEW in the vicinity of this site?

Thanks,

Victor Garcia, P.Eng

Associate

HGC Engineering NOISE | VIBRATION | ACOUSTICS

Howe Gastmeier Chapnik Limited

2000 Argentia Road, Plaza One, Suite 203, Mississauga, Ontario, Canada L5N 1P7

t: 905.826.4044 e: vgarcia@hgcengineering.com

Visit our website - www.hgcengineering.com Follow Us - LinkedIn | Twitter | YouTube

This e-mail and any attachments may contain confidential and privileged information. If you are not the intended recipient, please notify the sender immediately by return e-mail, delete this e-mail and destroy any copies. Any dissemination or use of this information by a person other than the intended recipient is unauthorized and may be illegal.

Victor Garcia

From: Krusto, Matt < Matt.Krusto@halton.ca>

Sent: March 2, 2021 9:44 AM

To: Victor Garcia

Subject: RE: Road Traffic Data Request **Attachments:** 100323 - nb & sb volume.xls

Hi Victor,

Thanks for checking. I have attached a 2019 24 hour 2-way count on Trafalgar north of Cross. It is 47,400. Therefore, to consider the existing Trafalgar at-capacity, please use 55,000.

The Trafalgar volumes likely won't significantly impact the site at 157 Cross, as it is +300m to the west.

Matt

From: Victor Garcia <vgarcia@hgcengineering.com>

Sent: Tuesday, March 2, 2021 9:07 AM
To: Krusto, Matt < Matt.Krusto@halton.ca>
Subject: RE: Road Traffic Data Request

CAUTION: This email originated from outside the organization. Do not click links or open attachments unless you recognize the sender and know the content is safe. If you are unsure or need assistance please contact the IT Service Desk.

Hi Matt,

We received the truck percentages from the email listed below, do you still provide ultimate traffic volumes for Trafalgar Rd or should we be projecting the volumes obtained from the TMC?

Thanks,

Victor Garcia, P.Eng HGC Engineering NOISE | VIBRATION | ACOUSTICS Howe Gastmeier Chapnik Limited t: 905.826.4044

From: Krusto, Matt < Matt.Krusto@halton.ca>

Sent: February 16, 2021 11:50 AM

To: Victor Garcia <vgarcia@hgcengineering.com>

Subject: RE: Road Traffic Data Request

Hi Victor,

Any requests for turning movement counts go to <u>trafficdatarequests@halton.ca</u> Cornwall traffic data, other than at the Trafalgar Road intersection, must be obtained from the Town of Oakville.

Truck percentages must be based on existing truck percentages from the data you receive.

| Marter Stations | Description | Count date | total vot | ampk cond | off pkeed | off pke

Prepared For: Halton Region

Prepared By: *PYRAMID* Traffic Inc.

Location: REG. RD. #3 200m north of Cross Ave

Site ID: 100323

Interval: 15 min.

Start Date: Thursday Sep 12, 2019

Period	Channel 1	Channel 2	Hourly	Period	Channel 1	Channel 2	Hourly
Ending	NB	SB	Summary	Ending	NB	SB	Summary
0:15	153	44		12:15	466	357	3070
0:30	68	37		12:30	419	326	3078
0:45	76	29		12:45	421	353	3135
1:00	35	28	470	13:00	428	368	3138
1:15	27	5	305	13:15	415	325	3055
1:30	15	24	239	13:30	438	298	3046
1:45	32	10	176	13:45	405		
2:00	14	11	138	14:00	438		
2:15	23	12	141	14:15	416	305	2930
2:30	20	6	128	14:30	458	278	2930
2:45	7	15	108	14:45	433		2968
3:00	8	7	98	15:00	435		
3:15	12	6	81	15:15	496		
3:30	7	3	65	15:30	501	324	
3:45	9	7	59	15:45	478	371	
4:00	9	7	60	16:00	483		
4:15	11	9	62	16:15	550	319	
4:30	12	15	79	16:30	518		
4:45	17	22	102	16:45	569	319	
5:00	19	47	152	17:00	467		
5:15	32	33	197	17:15	640	375	
5:30	33	56	259	17:30	635		
5:45	49	73	342	17:45	628		
6:00	67	103	446	18:00	492		
6:15	72	89	542	18:15	663	319	
6:30	97	158	708	18:30	436	312	3483
6:45	154	235	975	18:45	506		
7:00	164	280	1249	19:00	348	305	3211
7:15	200	295	1583	19:15	480		
7:30	255	381	1964	19:30	349	266	2872
7:45	283	389	2247	19:45	336	243	2623
8:00	326	449	2578	20:00	349	217	2536
8:15	343	452	2878	20:15	357	208	2325
8:30	446	496	3184	20:30	294	221	2225
8:45	437	406	3355	20:45	310	195	2151
9:00	339	453	3372	21:00	235	200	2020
9:15	328	376	3281	21:15	293	156	1904
9:30	301	324	2964	21:30	219	145	1753
9:45	314	340	2775	21:45	258	124	1630
10:00	341	340	2664	22:00	188	116	1499
10:15	325	276	2561	22:15	206	105	1361
10:30	363	284	2583	22:30	191	84	1272
10:45	336	305	2570	22:45	194	78	1162
11:00	354	301	2544	23:00	140	104	1102
11:15	369	305	2617	23:15	178	90	
11:30	399	338	2707	23:30	100	75	
11:45	372	345	2783	23:45	144	55	
12:00	414	379	2921	0:00	64	87	

AM Peak: 3372 PM Peak: 3746 24 HR VOLUME: 47408




Turning Movements Count - Full Study Report

Location...... CROSS AVENUE @ ARGUS ROAD

Municipality...... OAKVILLE

GeoID...... 30151301

Count Date...... Wednesday, 30 September, 2020

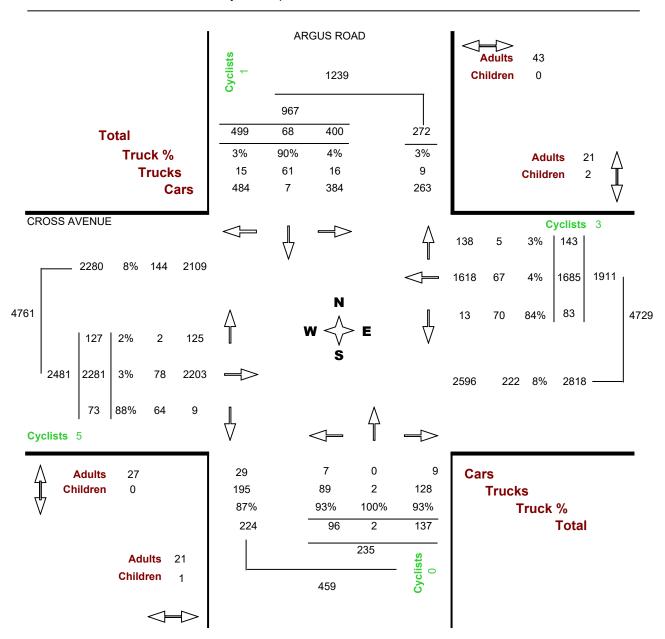

In all counts dated before 2018 - Adult pedestrian numbers include seniors, and the senior count = 0



Turning Movements Report - AM Period


Location...... CROSS AVENUE @ ARGUS ROAD

Municipality...... OAKVILLE

GeoID...... 30151301

Count Date...... Wednesday, 30 September, Peak Hour..... 08:00 AM — 09:00 AM

2020

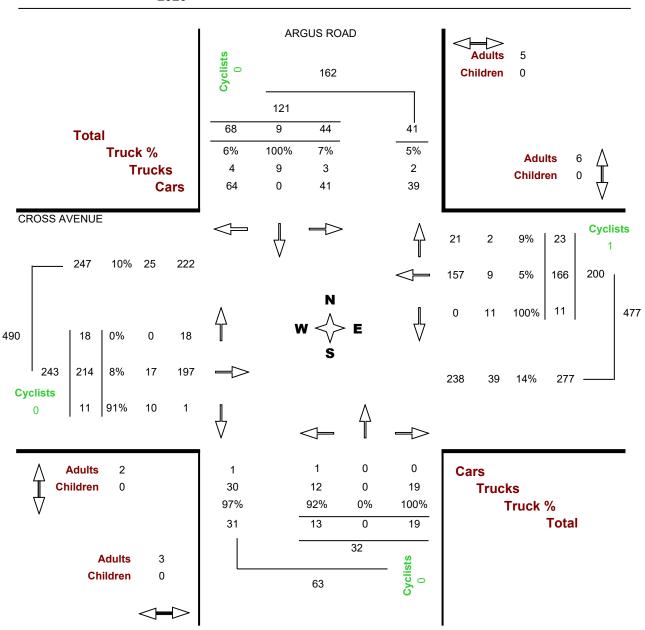

THIS INFORMATIONN IS SUPPLIED FROM OUR RECORDS AND IS NOT GUARANTEED TO BE CORRECT. WE RECOMMEND FIELD CHECKING TO VERIFY THE INFORMATION SHOWN.

In all counts dated before 2018 - Adult pedestrian numbers include seniors, and the senior count = 0



Turning Movements Report - MD Period


Location...... CROSS AVENUE @ ARGUS ROAD

Municipality...... OAKVILLE

GeoID...... 30151301

Count Date...... Wednesday, 30 September, Peak Hour..... 01:00 PM — 02:00 PM

2020

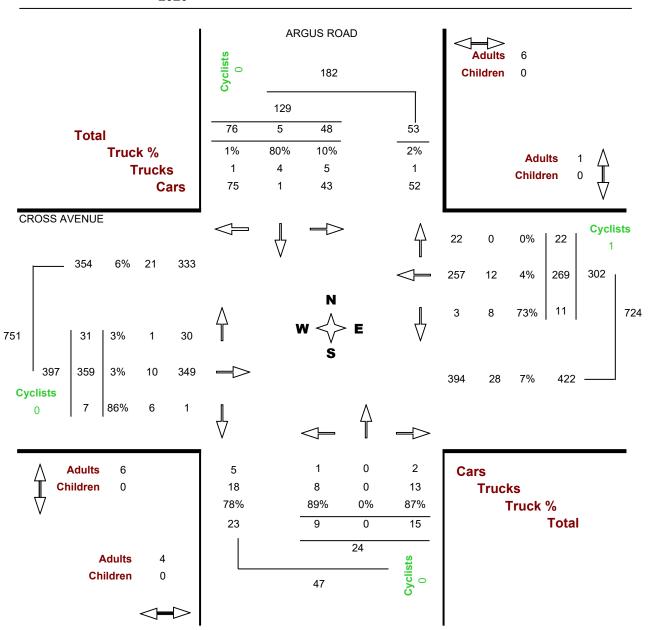

THIS INFORMATIONN IS SUPPLIED FROM OUR RECORDS AND IS NOT GUARANTEED TO BE CORRECT. WE RECOMMEND FIELD CHECKING TO VERIFY THE INFORMATION SHOWN.

In all counts dated before 2018 - Adult pedestrian numbers include seniors, and the senior count = 0



Turning Movements Report - PM Period


Location...... CROSS AVENUE @ ARGUS ROAD

Municipality...... OAKVILLE

GeoID...... 30151301

Count Date...... Wednesday, 30 September, Peak Hour..... 03:15 PM — 04:15 PM

2020

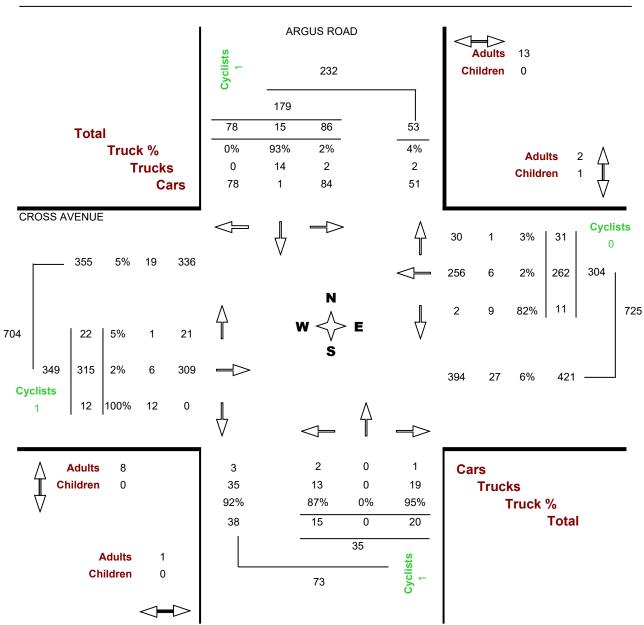

THIS INFORMATIONN IS SUPPLIED FROM OUR RECORDS AND IS NOT GUARANTEED TO BE CORRECT. WE RECOMMEND FIELD CHECKING TO VERIFY THE INFORMATION SHOWN.

In all counts dated before 2018 - Adult pedestrian numbers include seniors, and the senior count = 0



Turning Movement Count - Details Report

Location...... CROSS AVENUE @ ARGUS ROAD

Municipality..... OAKVILLE

Count Date...... Wednesday, September 30, 2020

ARGUS ROAD North Approach South Approach												OSS A	VENUE							
Time Period	LT	North A	pproac RT		Ped	LT	South A			Ped	LT	Eas	t Appr		Ped	LT	West	Appro		Ped
07:00 07:15	3	4	9	Cyclists 0	1	6	0	7	Cyclists 0	1	4	29	1	Cyclists 0	0	1	19	RT 3	Cyclists 0	0
07:15 07:30	3	1	12	0	0	1	0	1	0	0	1	31	3	0	2	4	41	2	0	1
07:30 07:45	3	3	7	0	0	5	0	8	0	0	6	36	1	0	0	2	37	4	0	1
07:45 08:00	6	1	18	0	4	0	0	3	0	0	2	29	3	0	2	1	40	1	0	0
Hourly Total	15	9	46	0	5	12	0	19	0	1	13	125	8	0	4	8	137	10	0	2
08:00 08:15	4	1	21	0	1	7	0	8	0	3	6	34	3	0	1	2	61	5	0	2
08:15 08:30	16	1	9	0	0	0	0	1	0	0	1	37	11	0	0	3	42	1	0	0
08:30 08:45	13	6	17	0	3	5	0	8	0	0	3	36	6	0	1	7	53	3	0	0
08:45 09:00	11	1	21	0	1	1	0	2	0	0	1	59	3	1	4	6	58	2	0	0
Hourly Total	44	9	68	0	5	13	0	19	0	3	11	166	23	1	6	18	214	11	0	2
11:00 11:15	4	0	4	0	0	6	0	6	0	0	1	28	3	0	0	1	41	1	0	0
11:15 11:30	10	0	23	0	1	2	1	1	0	1	1	64	2	0	0	5	84	1	3	0
11:30 11:45	14	2	24	0	0	2	0	3	0	0	2	79	7	0	1	3	91	1	1	3
11:45 12:00	7	0	8	0	0	3	1	3	0	0	4	56	4	0	0	3	95	0	0	1
Hourly Total	35	2	59	0	1	13	2	13	0	1	8	227	16	0	1	12	311	3	4	4
12:00 12:15	21	2	20	0	3	4	0	3	0	0	3	58	8	1	0	3	77	3	0	0
12:15 12:30	6	2	12	0	0	1	0	3	0	4	2	53	4	0	0	4	96	2	0	0
12:30 12:45	13	2	17	0	0	6	0	4	0	3	8	58	4	0	0	1	91	2	0	0
12:45 13:00	15	0	20	0	2	0	0	3	0	2	2	71	6	0	0	5	93	2	0	2
Hourly Total	55	6	69	0	5	11	0	13	0	9	15	240	22	1	0	13	357	9	0	2
13:00 13:15	15	4	23	0	0	5	0	4	0	1	4	66	3	1	0	2	95	2	0	0
13:15 13:30	8	0	16	0	0	0	0	3	0	1	0	71	6	0	0	6	94	2	0	3
13:30 13:45	12	0	18	0	3	3	0	4	0	1	4	55	6	0	1	5	82	2	0	2
13:45 14:00	13	1	19	0	3	1	0	4	0	1	3	77	7	0	0	18	88	1	0	1
Hourly Total	48	5	76	0	6	9	0	15	0	4	11	269	22	1	1	31	359	7	0	6
15:00 15:15	6	2	9	0	2	6	0	7	0	0	5	42	2	0	0	4	50	2	0	0
15:15 15:30	21	3	27	0	3	2	0	3	0	0	2	71	16	0	0	6	85	1	1	1
15:30 15:45	19	5	14	0	6	3	0	6	0	0	3	70	8	0	2	8	63	4	0	7
15:45 16:00	23	2	19	1	2	3	0	3	0	1	2	54	3	0	1	4	81	1	0	0
Hourly Total	69	12	69	1	13	14	0	19	0	1	12	237	29	0	3	22	279	8	1	8
16:00 16:15	23	5	18	0	2	7	0	8	0	0	4	67	4	0	0	4	86	6	0	0
16:15 16:30	6	1	13	0	2	1	0	4	0	0	0	55	5	0	2	4	89	3	0	0
16:30 16:45	17	6	15	0	2	4	0	6	0	0	3	57	2	0	4	3	72	5	0	0
16:45 17:00	19	1	23	0	0	1	0	3	0	0	1	58	3	0	1	4	94	1	0	0
Hourly Total	65	13	69	0	6	13	0	21	0	0	8	237	14	0	7	15	341	15	0	0
17:00 17:15	31	3	11	0	0	3	0	7	0	1	3	43	0	0	1	2	88	3	0	1
17:15 17:30	15	0	15	0	2	2	0	3	0	2	1	57	4	0	0	1	72	1	0	2
17:30 17:45	14	8	12	0	0	5	0	7	0	0	1	47	5	0	0	3	65	4	0	0
17:45 18:00	9	1	5	0	0	1	0	1	0	0	0	37	0	0	0	2	58	2	0	0
Hourly Total	69	12	43	0	2	11	0	18	0	3	5	184	9	0	1	8	283	10	0	3
Grand Total	400	68	499	1	43	96	2	137	0	22	83	1685	143	3	23	127	2281	73	5	27
Truck %	4%	90%	3%			93%	100%	93%			84%	4%	3%			2%	3%	88%		

APPENDIX B

Rail Traffic Data









Train Count Data

System Engineering Engineering Services

1 Administration Road Concord, ON, L4K 1B9 T: 905.669.3264 F: 905.760.3406

TRANSMITTAL

To: Destinataire :	HGC Engineering 2000 Argentia Rd Plaza, Suite 203 Mississauga ON L5N 1P7	Project :	OAK – 21.20 – Cornwall Rd, Oakville ON
Att'n:	Victor Garcia	Routing:	vgarcia@hgcengineering.com
From: Expéditeur :	Michael Vallins	Date:	2021/04/26
Cc:	Adjacent Development CN via e-mail		
☐ Urgent	☐ For Your Use ☐ For ?	Review	☐ For Your Information ☐ Confidential
Re: Tra Oakville, O)akville	Subdivision near Cornwall Rd in

Please find attached the requested Train Traffic Data; this data does not reflect GO Metrolinx Traffic. The application fee in the amount of **\$500.00** +HST will be invoiced.

Should you have any questions, please do not hesitate to contact the undersigned at permits.gld@cn.ca.

Sincerely,

CN Design & Construction

Michael Vallins P.Eng

Manager Public Works- Eastern Canada

Permits.gld@cn.ca

Train Count Data Page 1

Project Number: OAK – 21.20 – Cornwall Rd, Oakville ON

Dear Victor:

Date: 2021/04/26

Re: Train Traffic Data – CN Oakville Subdivision near Cornwall Rd in Oakville, ON

The following is provided in response to Victor's 2021/02/16 request for information regarding rail traffic in the vicinity of Cornwall Rd in Oakville at approximately Mile 21.20 on CN's Oakville Subdivision.

Typical daily traffic volumes are recorded below. However, traffic volumes may fluctuate due to overall economic conditions, varying traffic demands, weather conditions, track maintenance programs, statutory holidays and traffic detours that when required may be heavy although temporary. For the purpose of noise and vibration reports, train volumes must be escalated by 2.5% per annum for a 10-year period.

Typical daily traffic volumes at this site location are as follows:

*Maximum train speed is given in Miles per Hour

•	0700-2300			
Type of Train	Volumes	Max.Consist	Max. Speed	Max. Power
Freight	2	140	60	4
Way Freight	0	25	60	4
Passenger	12	10	95	2

	2300-0700			
Type of Train	Volumes	Max.Consist	Max. Speed	Max. Power
Freight	2	140	60	4
Way Freight	0	25	60	4
Passenger	1	10	95	2

The volumes recorded reflect westbound and eastbound freight and passenger operations on CN's Oakville Subdivision.

Except where anti-whistling bylaws are in effect, engine-warning whistles and bells are normally sounded at all at-grade crossings. There is one (1) at-grade crossing in the immediate vicinity of the study area at Mile 21.97 Kerr St. Anti-whistling bylaws are in effect at this crossing. Please note that engine warning whistles may be sounded in cases of emergency, as a safety and or warning precaution at station locations and pedestrian crossings and occasionally for operating requirements.

With respect to equipment restrictions, the gross weight of the heaviest permissible car is 286,000 lbs.

The four mainline tracks are considered to be continuously welded rail throughout the study area. The presence of four (4) switches located at Mile 21.85, 21.99, 22.07, and 22.20 may exacerbate the noise and vibration caused by train movements.

The Canadian National Railway continues to be strongly opposed to locating developments near railway facilities and rights-of-way due to potential safety and environmental conflicts. Development adjacent to the Railway Right-of-Way is not appropriate without sound impact mitigation measures to reduce the incompatibility. For confirmation of the applicable rail noise, vibration and safety standards, Adjacent Development, Canadian National Railway Properties at Proximity@cn.ca should be contacted directly.

I trust the above information will satisfy your current request.

Sincerely,

Michael Vallins P.Eng

Manager Public Works- Eastern Canada

Permits.gld@cn.ca

Yvonne Lo

From: Rail Data Requests < RailDataRequests@metrolinx.com>

Sent: February 23, 2021 4:26 PM

To: Victor Garcia

Subject: RE: Rail Traffic Data Requests-157-165 Cross Ave, Oakville

Hi Victor:

Further to your request dated February 16, 2021, the subject lands (157-165 Cross Ave, Oakville) are located within 300 metres of the Metrolinx Oakville Subdivision (which carries Lakeshore West GO rail service).

It's anticipated that GO rail service on this Subdivision will be comprised of diesel and electric trains. The GO rail fleet combination on this Subdivision will consist of up to 2 locomotives and 12 passenger cars. The typical GO rail weekday train volume forecast near the subject lands, including both revenue and equipment trips is in the order of 255 trains. The planned detailed trip breakdown is listed below:

	1 Diesel	2 Diesel	1 Electric	2 Electric		1 Diesel	2 Diesel	1 Electric	2 Electric
	Locomotive	Locomotives	Locomotive	Locomotives		Locomotive	Locomotives	Locomotive	Locomotives
Day (0700- 2300)	60	11	101	42	Night (2300- 0700)	8	4	21	8

The current track design speed near the subject lands is 80 mph (129 km/h).

With respect to future electrified rail service, Metrolinx is committed to finding the most sustainable solution for electrifying the GO rail network and we are currently working towards the next phase.

Options have been studied as part of the Transit Project Assessment Process (TPAP) for the GO Expansion program, currently in the procurement phase. The successful proponent team will be responsible for selecting and delivering the right trains and infrastructure to unlock the benefits of GO Expansion. The contract is in a multi-year procurement process and teams are currently completing the bids that will close in 2021. GO Expansion construction will get underway in 2022.

However, we can advise that train noise is dominated by the powertrain at lower speeds and by the wheel- track interaction at higher speeds. Hence, the noise level and spectrum of electric trains is expected to be very similar at higher speeds, if not identical, to those of equivalent diesel trains.

Given the above considerations, it would be prudent at this time, for the purposes of acoustical analyses for development in proximity to Metrolinx corridors, to assume that the acoustical characteristics of electrified and diesel trains are equivalent. In light of the aforementioned information, acoustical models should employ diesel train parameters as the basis for analyses. We anticipate that additional information regarding specific operational parameters for electrified trains will become available in the future once the proponent team is selected.

There are anti-whistling by-laws in affect at Kerr St and Chartwell Rd at-grade crossings.

Operational information is subject to change and may be influenced by, among other factors, service planning priorities, operational considerations, funding availability and passenger demand.

It should be noted that this information only pertains to Metrolinx rail service. It would be prudent to contact other rail operators in the area directly for rail traffic information pertaining to non-Metrolinx rail service.

I trust this information is useful. Should you have any questions or concerns, please do not hesitate to contact me.

Regards,

APPENDIX C

Preliminary Drawings







BDP. Quadrangle

Quadrangle Architects Limited
901 King Street West, Suite 701 Toronto, ON M5V 3H5
t 416 598 1240 www.bdpquadrangle.com



217-227 Cross Avenue and 571-587 Argus Road

Distrikt Developments

Project No. 19072 Date 13 March 2024 Issued for Coordination

ARCHITECTURAL DRAWINGS

Cover Page

A102.S Circulation Site Plan P6 and P3-P5 Underground Plans A152.S

P2 and P1 Underground Plan A153.S P1 Mezzanine Underground Plan A201.S Ground and Bicycle Mezzanine Plans Second and Typical Third to Sixth Floor Plans

Seventh and Eighth Floor Plans A204.S Typical Tower and Mechanical Penthouse Plans A205.S Building A and B - East and North Elevations

Building A and B - West and South Elevations A403.S Building C - East and North Elevations Building C - West and South Elevations A410.S Building C - Coloured Elevation

Building B and C Sections

PLANNING CONSULTANT

Bousfields Inc. 3 Church Street, Suite 200 Toronto, ON M5E 1M2 T (416) 947-9744

CIVIL CONSULTANT

Trafalgar Engineering Ltd. 1-481 Morden Rd Oakville, ON L6K 3W6 T (905) 338-3366

URBAN DESIGN & LANDSCAPE ARCHITECT

148 Kenwood Ave

York, ON M6C 2S3

T (416) 656-6665

Janet Rosenberg & Studio Inc. BA Consulting Group Ltd 45 St Clair Ave W Toronto, ON M4V 1K9 T (416) 961-7110

TRAFFIC

CONSULTANT 1

TRAFFIC **CONSULTANT 2** Paradigm Transportation Solutions Ltd 150 Pinebush Rd #5A

Cambridge, ON N1R 8J8 T (519) 896-3163

STRUCTURAL CONSULTANT Jablonsky Ast & Partners 3 Concorde Gate, Unit 400

Toronto, ON M3C 3N7

T (416) 447-7405

MECHANICAL

CONSULTANT Smith + Andersen 1100-100 Sheppard Ave. East Toronto, ON M2N 6N5 T (416) 487-8151

INTERIOR DESIGN CONSULTANT

Figure 3 200 University Avenue, Suite 200 Toronto, ON M5H 3C6 T (416) 363-6993





2 KEY PLAN

	217-227 Cross Ave and 571-587 Argus Rd Distrikt Developments										
	sm sf										
Gross Lot Area:	12599	135613									
Area of Road Conveyances:	2685	28905									
Area of Promenade Conveyance:	631	6794									
Net Lot Area:	9282	99914									
POPS Area (not conveyed):	2846	30639									

		Proposed Residential												
		Floor	Floor Area/Typ.	No. Typ. Floors	Gross Flo	oor Area**	Residential GFA	Non-Res	GFA (sm)	Indoor Amenity	Outdoor	Residential Net Saleable Area -	No. of Units	
			Floor (sm)	110111111111111111111111111111111111111	sm	sf	(sm)	Retail (sm)	Office (sm)	GFA (sm)	Amenity (sm)	RNSA (sm)	1101 01 011110	
∢ 、	Tower A	MPH	0	1	0	0	0	0	0	0	0	0	0	
AG REY		Level 9-37	850	29	24650	265333	24650	0	0	0	0	19343	348	
BUILDING 37 STOREY		Level 8	850	1	850	9149	850	0	0	0	0	627	12	
UIL 37 S	Podium A	Level 7	621	1	621	6689	372	0	0	224	719	241	5	
₩ "		Level 3-6	1543	4	6171	66430	6175	0	0	0	0	5091	88	
		Level 2	1279	1	1279	13765	0	0	0	850	462	0	0	
		Mezzanine	889	1	889	9570	0	0	0	0	0	0	0	
		Ground	1692	1	1692	18212	1105	460	0	0	0	0	0	
	Building A T	otal			36153	389148	33152	460	0	1074	1181	25301	453	
													100%	

		Proposed Residential											
	Floor		Floor Area/Typ.	No. Typ. Floors	Gross Floor Area**		Residential GFA	Non-Res GFA (sm)		Indoor Amenity		Residential Net Saleable Area -	No. of Units
	11001		Floor (sm)	110. 170.110010	sm	sf	(sm)	Retail (sm)	Office (sm)	GFA (sm)	Amenity (sm)	RNSA (sm)	1.0.0.01110
ω .	Tower B	MPH	0	1	0	0	0	0	0	0	0	0	0
ING		Level 9-49	850	41	34850	375125	34850	0	0	0	0	27709	530
LDING		Level 8	850	1	850	9149	850	0	0	0	0	679	13
BUIL 49 S	Podium B	Level 7	850	1	850	9149	850	0	0	0	0	679	13
B 7		Level 3-6	1239	4	4958	53364	4958	0	0	0	0	4169	68
		Level 2	1298	1	1298	13972	0	0	0	881	190	0	0
		Mezzanine	882	1	882	9492	0	0	0	0	0	0	0
		Ground	1137	1	1137	12240	907	230	0	0	107	0	0
	Building B Tot	tal			44825	482493	42415	230	0	881	297	33236	624
													100%

						P	roposed Residenti	al					
	I FIOOT I		Floor Area/Typ. No. T	No. Typ. Floors	Gross Floor Area**		Residential GFA	Non-Res GFA (sm)		Indoor Amenity		Residential Net Saleable Area -	No. of Units
			Floor (sm)	Floor (sm)	sm	sf	(sm)	Retail (sm)	Office (sm)	GFA (sm)	Amenity (sm)	RNSA (sm)	
	Tower C	MPH	0	1	0	0	0	0	0	0	0	0	0
υ、		Level 33-65	850	35	29750	320229	29750	0	0	0	0	23252	455
REY G		Level 32	850	1	850	9149	850	0	0	0	0	525	10
BUILDING 65 STORE		Level 9-31	850	21	17850	192137	17850	0	0	0	0	13951	273
UIL 65 S		Level 8	972	1	972	10457	657	0	0	314	255	486	7
B	Podium C	Level 7	1164	1	1164	12525	0	0	0	847	951	0	0
		Level 3-6		4	8233	88624	8233	0	0	0	0	6753	116
		Level 2		1	2694	29002	0	0	2694	0	0	0	0
		Mezzanine	1596	1	1596	17175	0	0	0	635	0	0	0
		Ground	2652	1	2652	28547	1777	875	0	111	32	0	0
	Building C Total				65761	707846	59118	875	2694	1907	1239	44967	861
													100%

Total Floor Area, Gross**	146,738 sm	± 1,579,487 sf		
Total Residental Net Saleable Area:	103,503 sm	± 1,114,109 sf		
FSI*:	11.65			
Total No. of Units	1938			

	Parl	king				
	Min. Rate	Min. No.	Provided			
Resident	0.5	920	920			
Visitor	0.15	276	281			
Retail	1.08	17	17			
Office	1.08	29	29			
TOTA	L	1242	1247			
	37					
	143					
	208					
	214					
	P4					
	214					
	217					
	TOTAL		1247			

	Bicycle	Parking					
	Min. Rate	Min. No.	Provided				
Long Term	0.75	1454	1454				
Short Term	0.25	485	485				
Retail	1	2	2				
Office	1	3	3				
TOTA	AL	1942	1944				
	Mezzanine						
	P1 Mezzanine						
	P1						
	P2						
	P3						
	P4						
	P5						
	P6						
	TOTAL		1944				

	Provided	Rate
Indoor	3863	1.99
Outdoor	2717	1.40
TOTAL	6580	
	Lockers	
P1 Mezz	anine	0
P1		108
P2		237
P3		237
P4		237
P5		237
P6		237
TOTA	L	1293

Approx. Unit Mix							
Studios	1B	2B	3B				
98	1,164	542	134				
5%	60%	28%	7%				


Definitions of Gross Floor Area, Net Floor Area and FSI are taken from Oakville By Law 2014-014, 2015-018 and 2023-065

* FSI - Floor Space Index By-Law 2014-014: means the net floor area of all buildings on a lot divided by the lot area.

Amended by 2023-065 to read: means the gross floor area of all buildings on a lot divided by the lot area.

** Gross Floor Area Definition By-Law 2023-065: means the total area of all of the floors in a building measured from the exterior faces of the exterior walls, but shall not include an attic, basement or mechanical penthouse.

STATISTICS

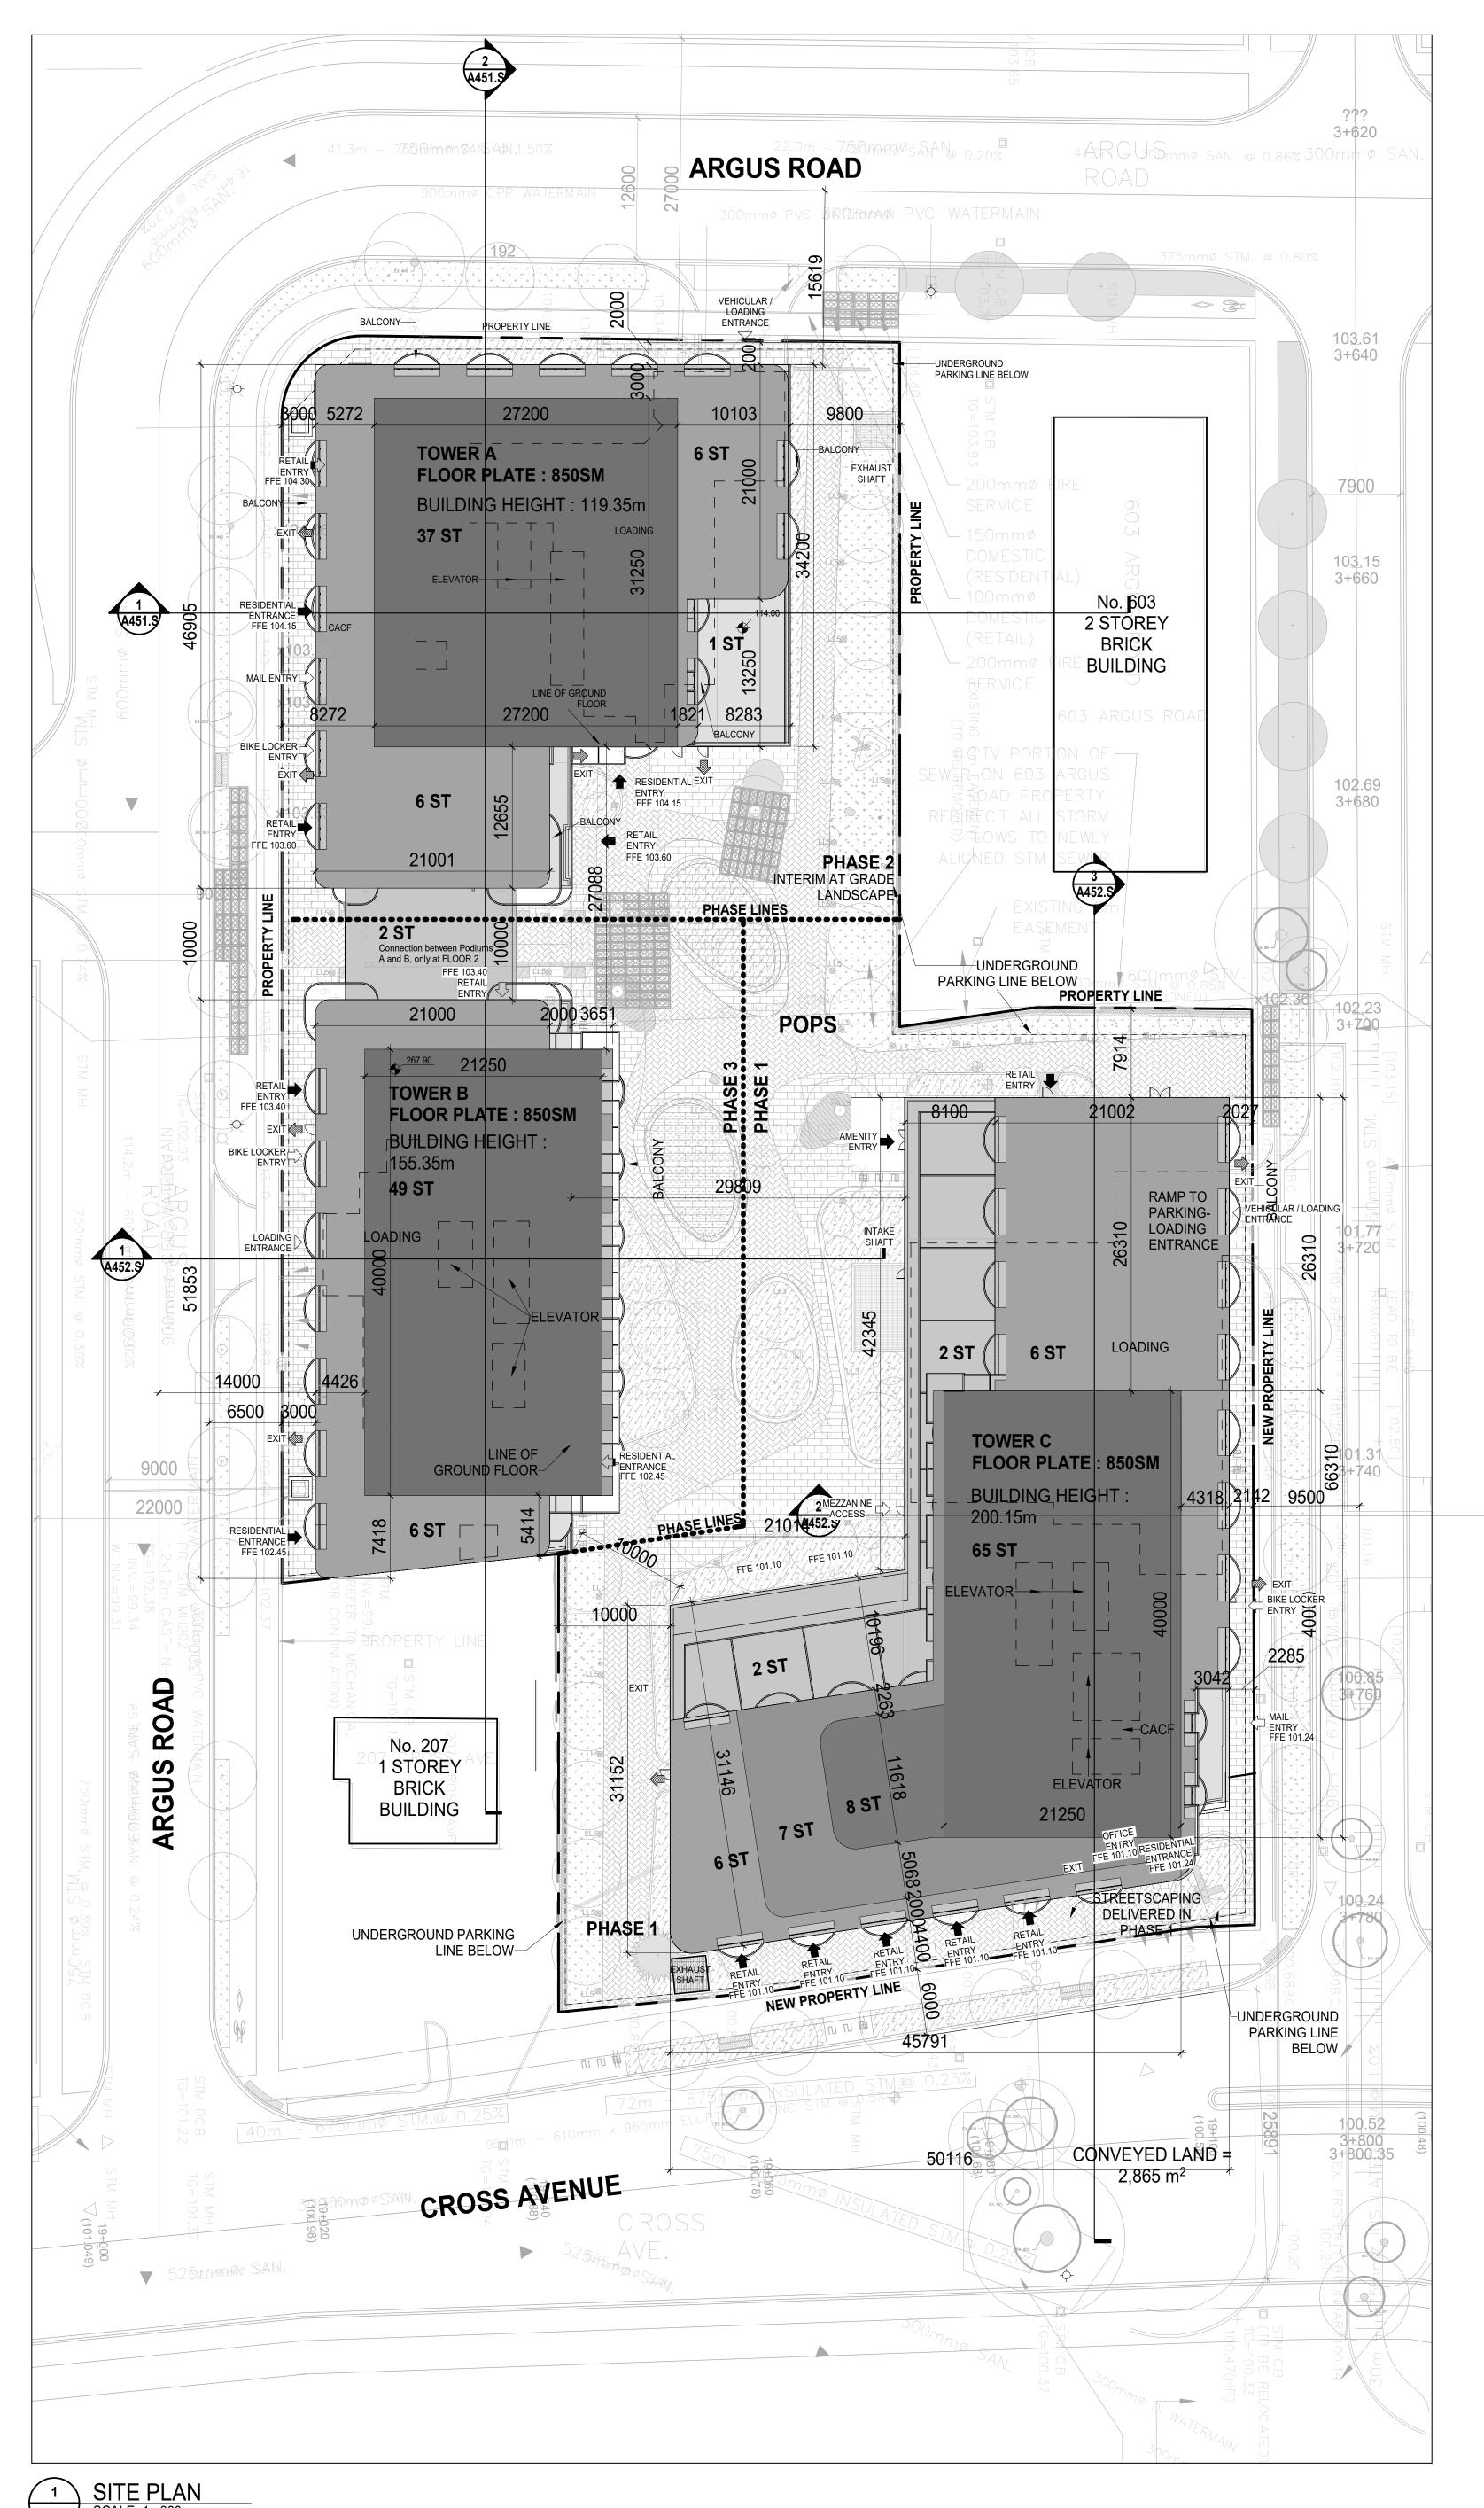

LINE OF UNDER GROUND GARAGE BELOW

MAIN BUILDING ENTRANCE

RETAIL ENTRANCE

EXIT

VEHICLE / LOADING ENTRANCE / EXIT

FIRE HYDRANT

SIAMESE CONNECTION

MANHOLE COVER

AREA DRAIN

CATCH BASIN

FLOOR DRAIN (PARKING SLAB)

FLOOR DRAIN (INTERIOR)

EXISTING LIGHT

TYPICAL PARKING SPACE

TYPICAL PARKING SPACE

FINISH FLOOR ELEVATION

EXISTING ELEVATION

PROPOSED ELEVATION

TOP OF ROOF

BUILDING ENVELOPE

FIRE ACCESS ROUTE HEAVY DUTY PAVING, ASSEMBLY TO BE DESIGNED TO MEET THE LOADS IMPOSED BY FIRE FIGHTING EQUIPMENT.

GREEN ROOF

TERRACE PAVERS


SITE PLAN LEGEND

Date No. Description

Date No. Description

REVISION RECORD

2023-10-01 Issued for Rezoning & OLT 2022-04-19 Issued for Rezoning



BDP. Quadrangle

Quadrangle Architects Limited
901 King Street West, Suite 701 Toronto, ON M5V 3H5
t 416 598 1240 www.bdpquadrangle.com

217-227 Cross Avenue and

571-587 Argus Road

for Distrikt Developments


19072 1:300 PROJECT SCALE


Site Plan and Statistics

A101.S

UI KVE

DRAWN REVIEWED

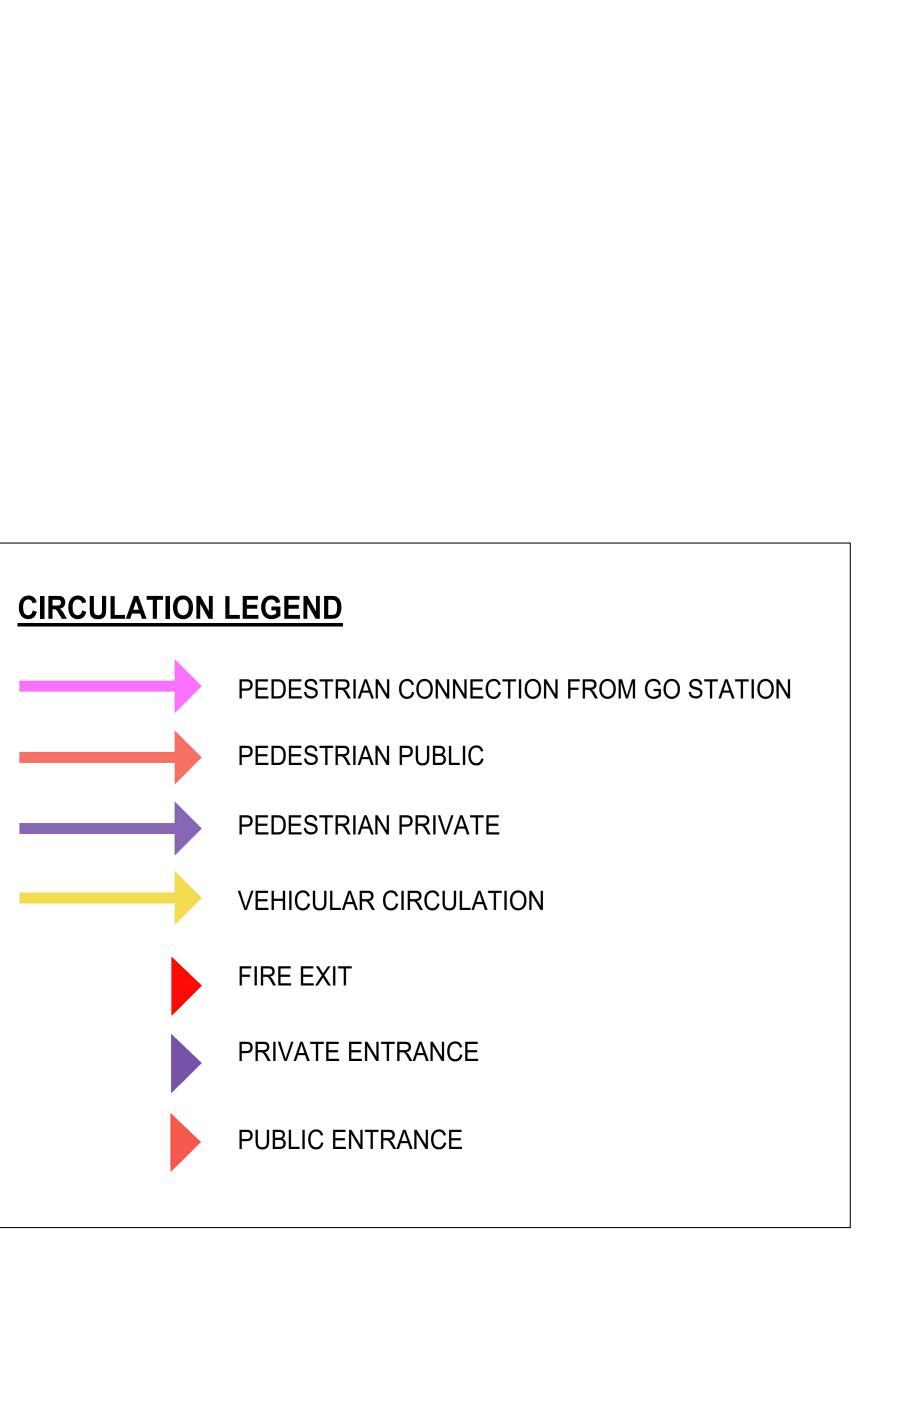

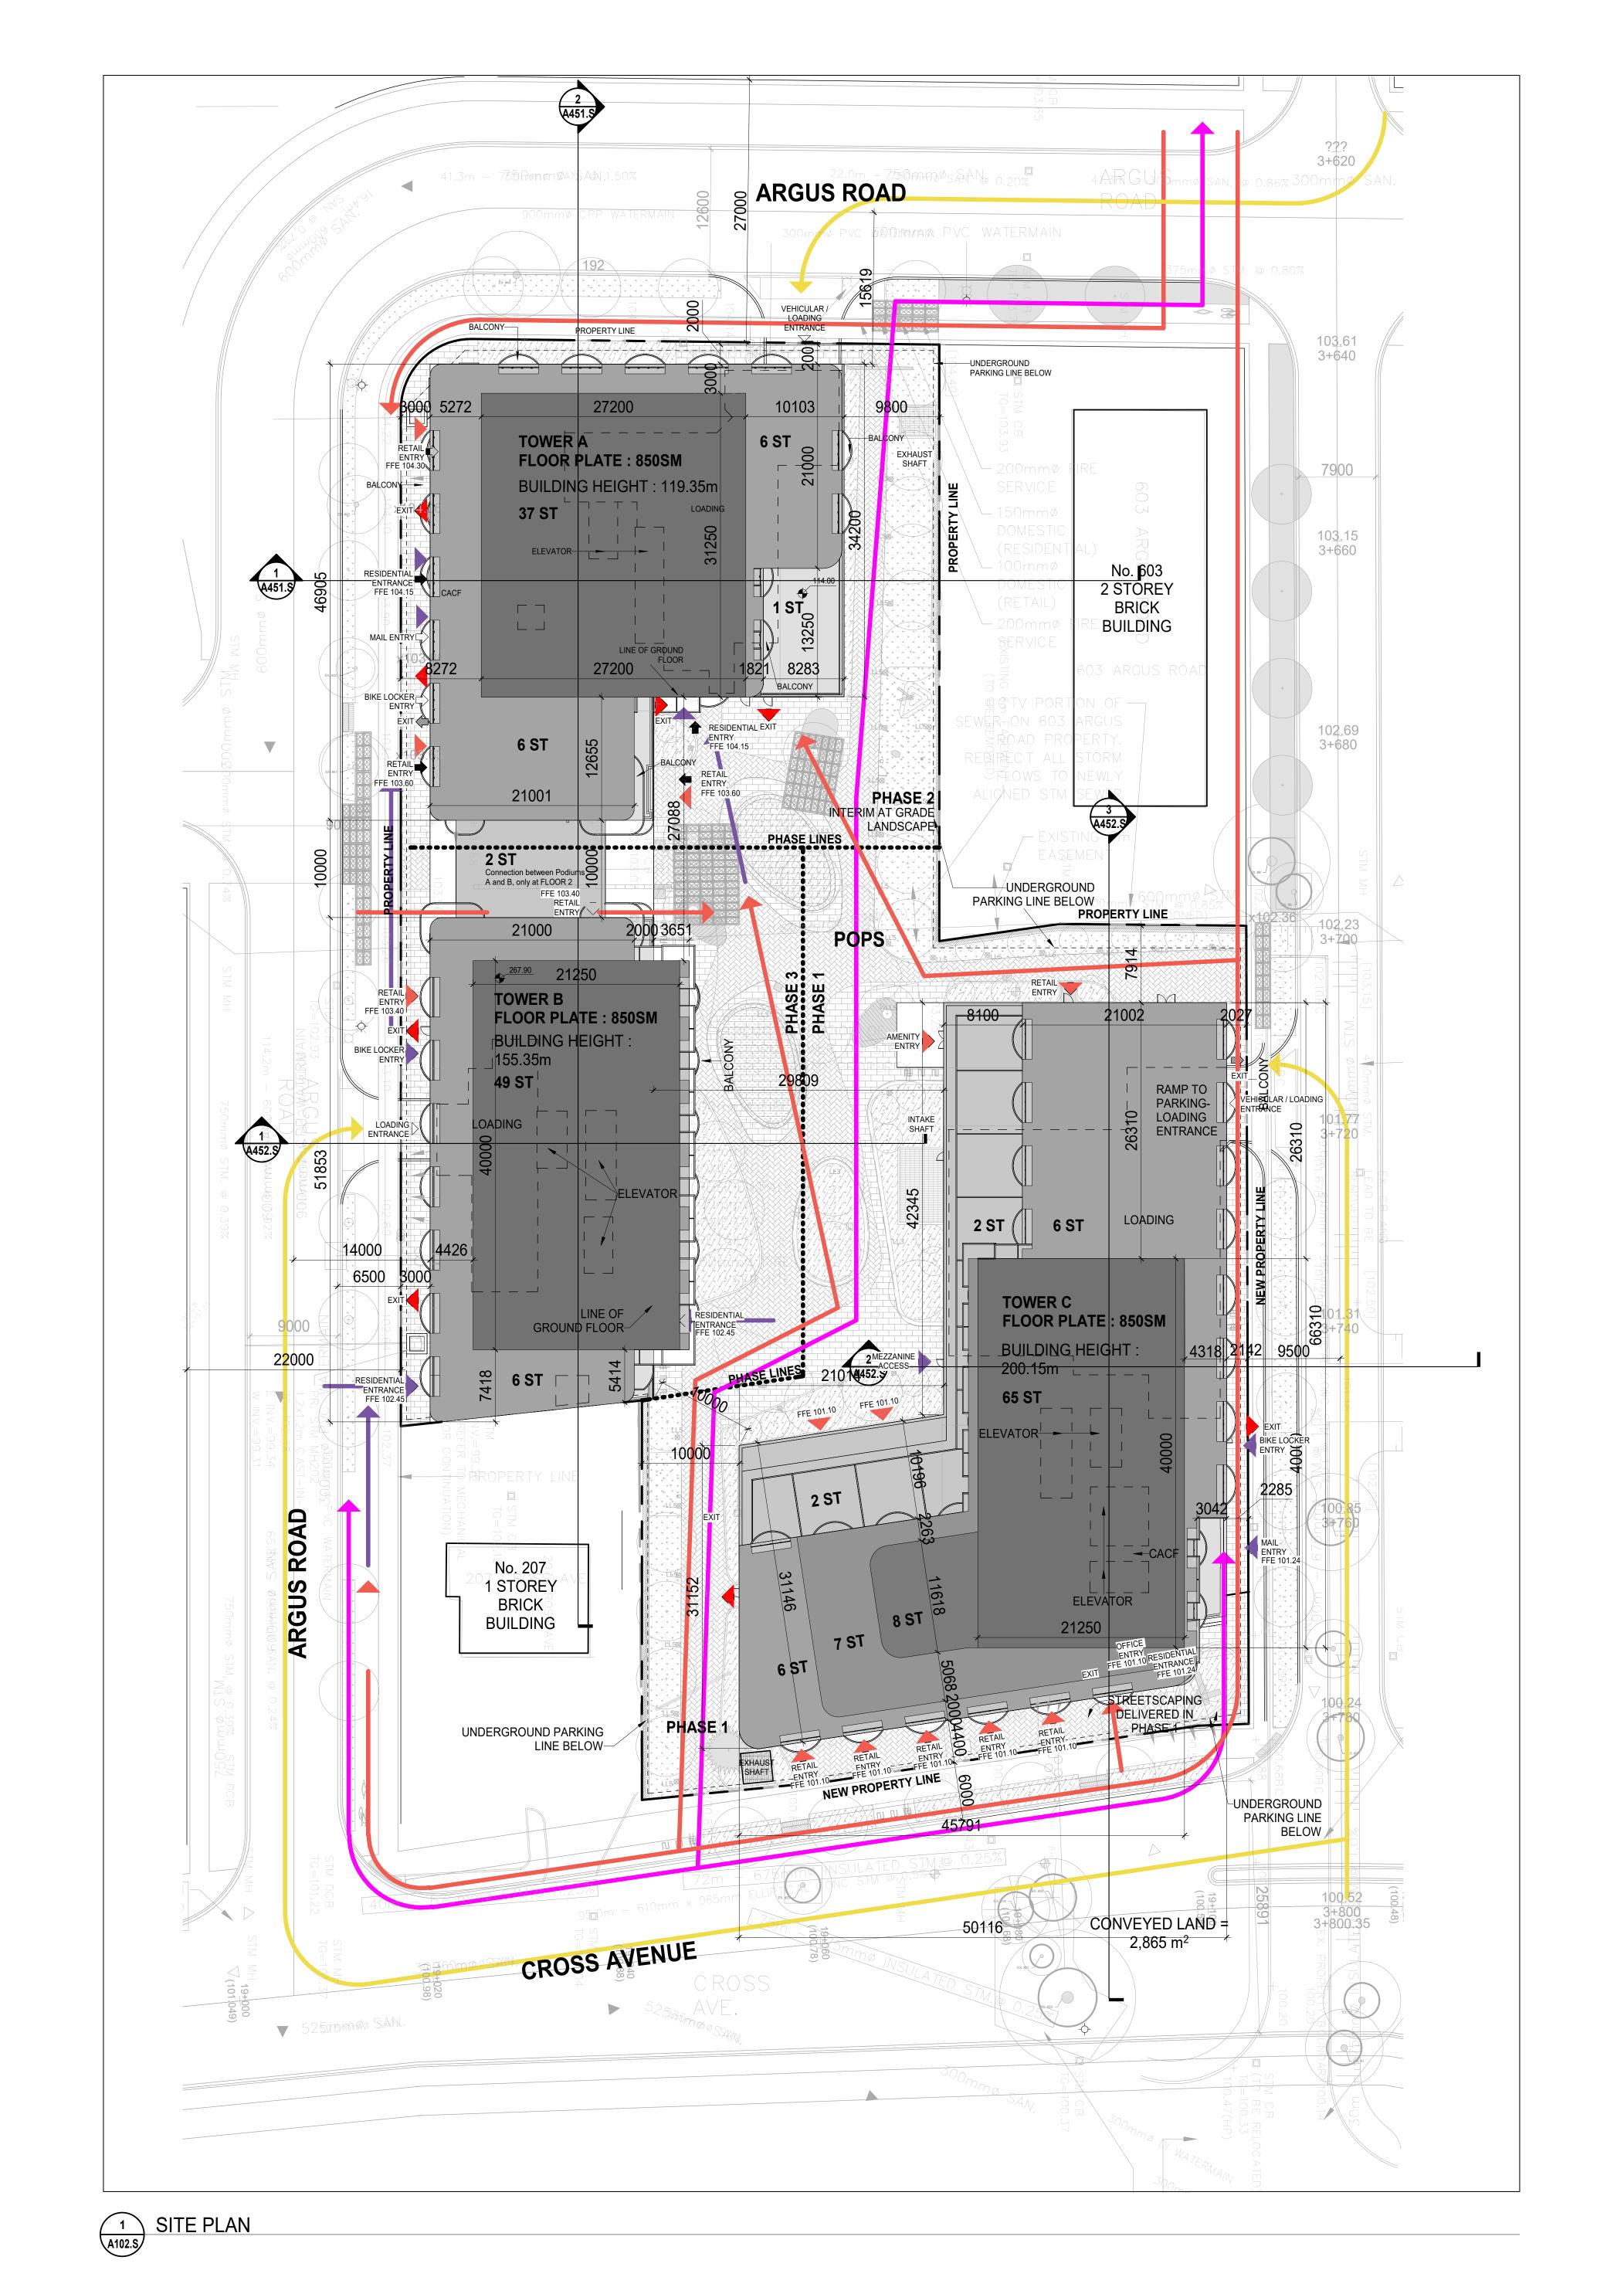


Date No. Description

Date No. Description

REVISION RECORD

2023-10-01 Issued for Rezoning & OLT
2022-04-19 Issued for Rezoning

ISSUERECORD



BDP. Quadrangle

Quadrangle Architects Limited
901 King Street West, Suite 701 Toronto, ON M5V 3H5
t 416 598 1240 www.bdpquadrangle.com


217-227 Cross Avenue and 571-587 Argus Road


| for | Distrikt Developments

19072 1:300 UI KVE
PROJECT SCALE DRAWN REVIEWED

Circulation Site Plan


A102.S

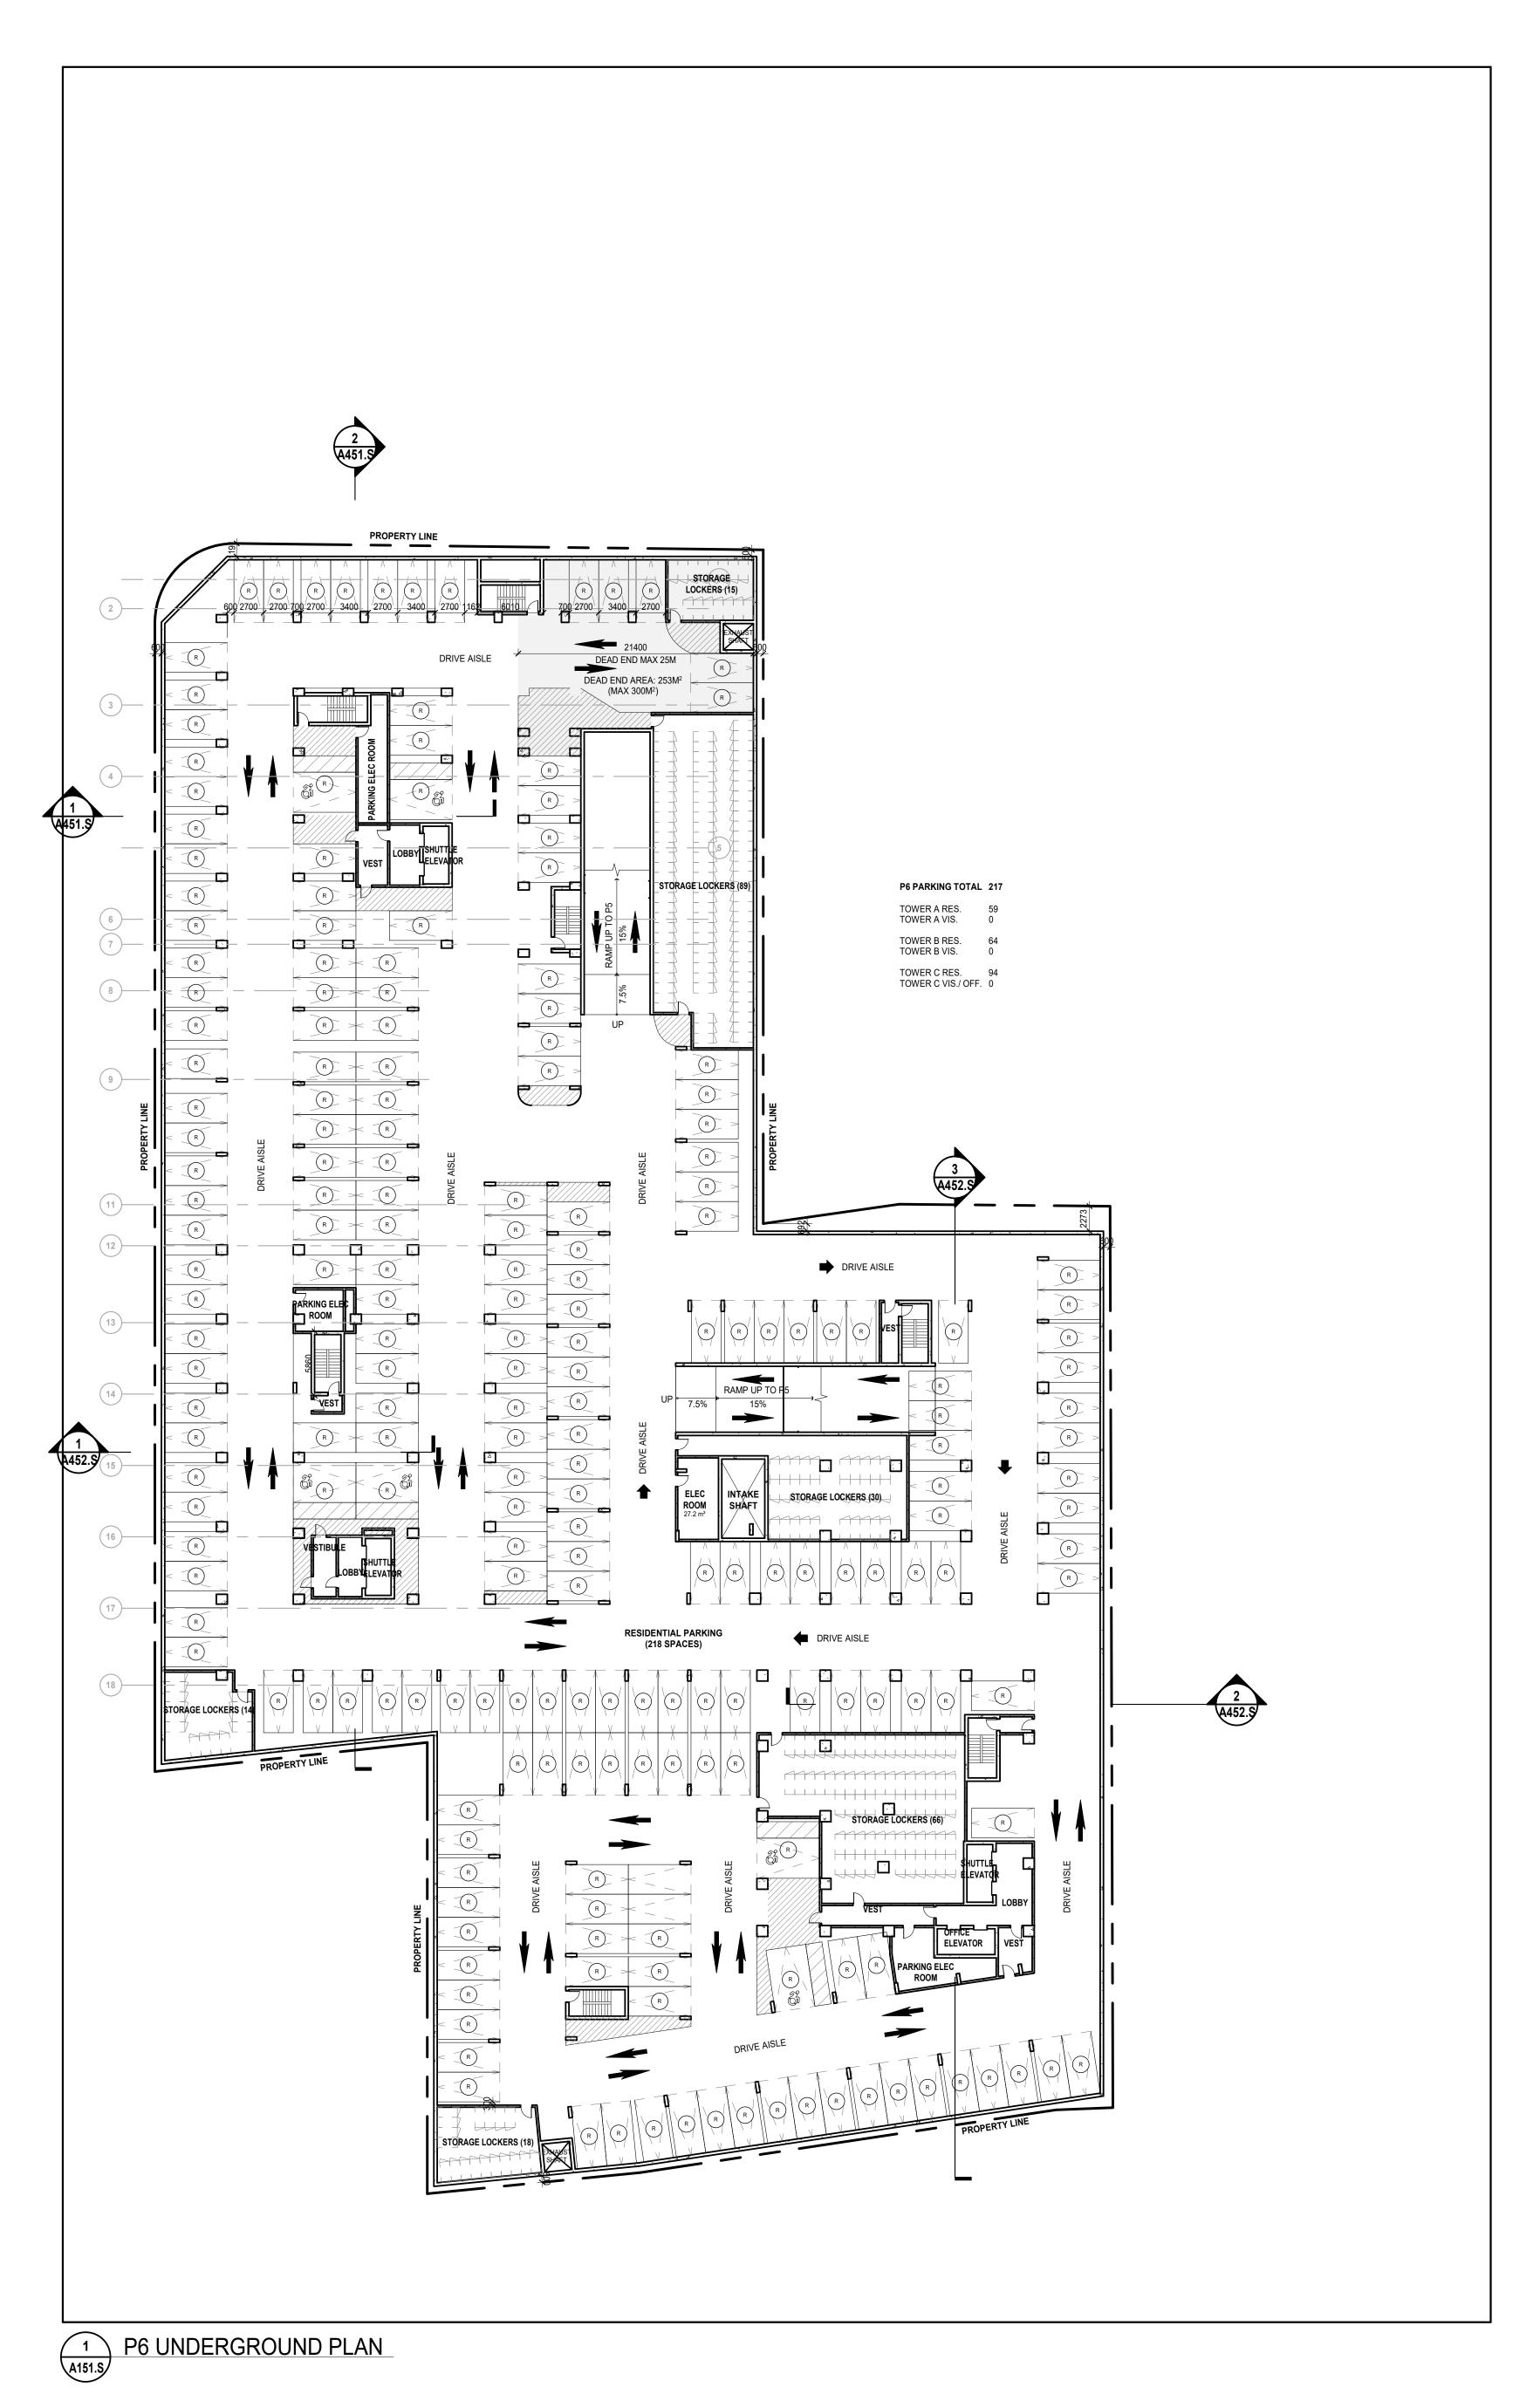

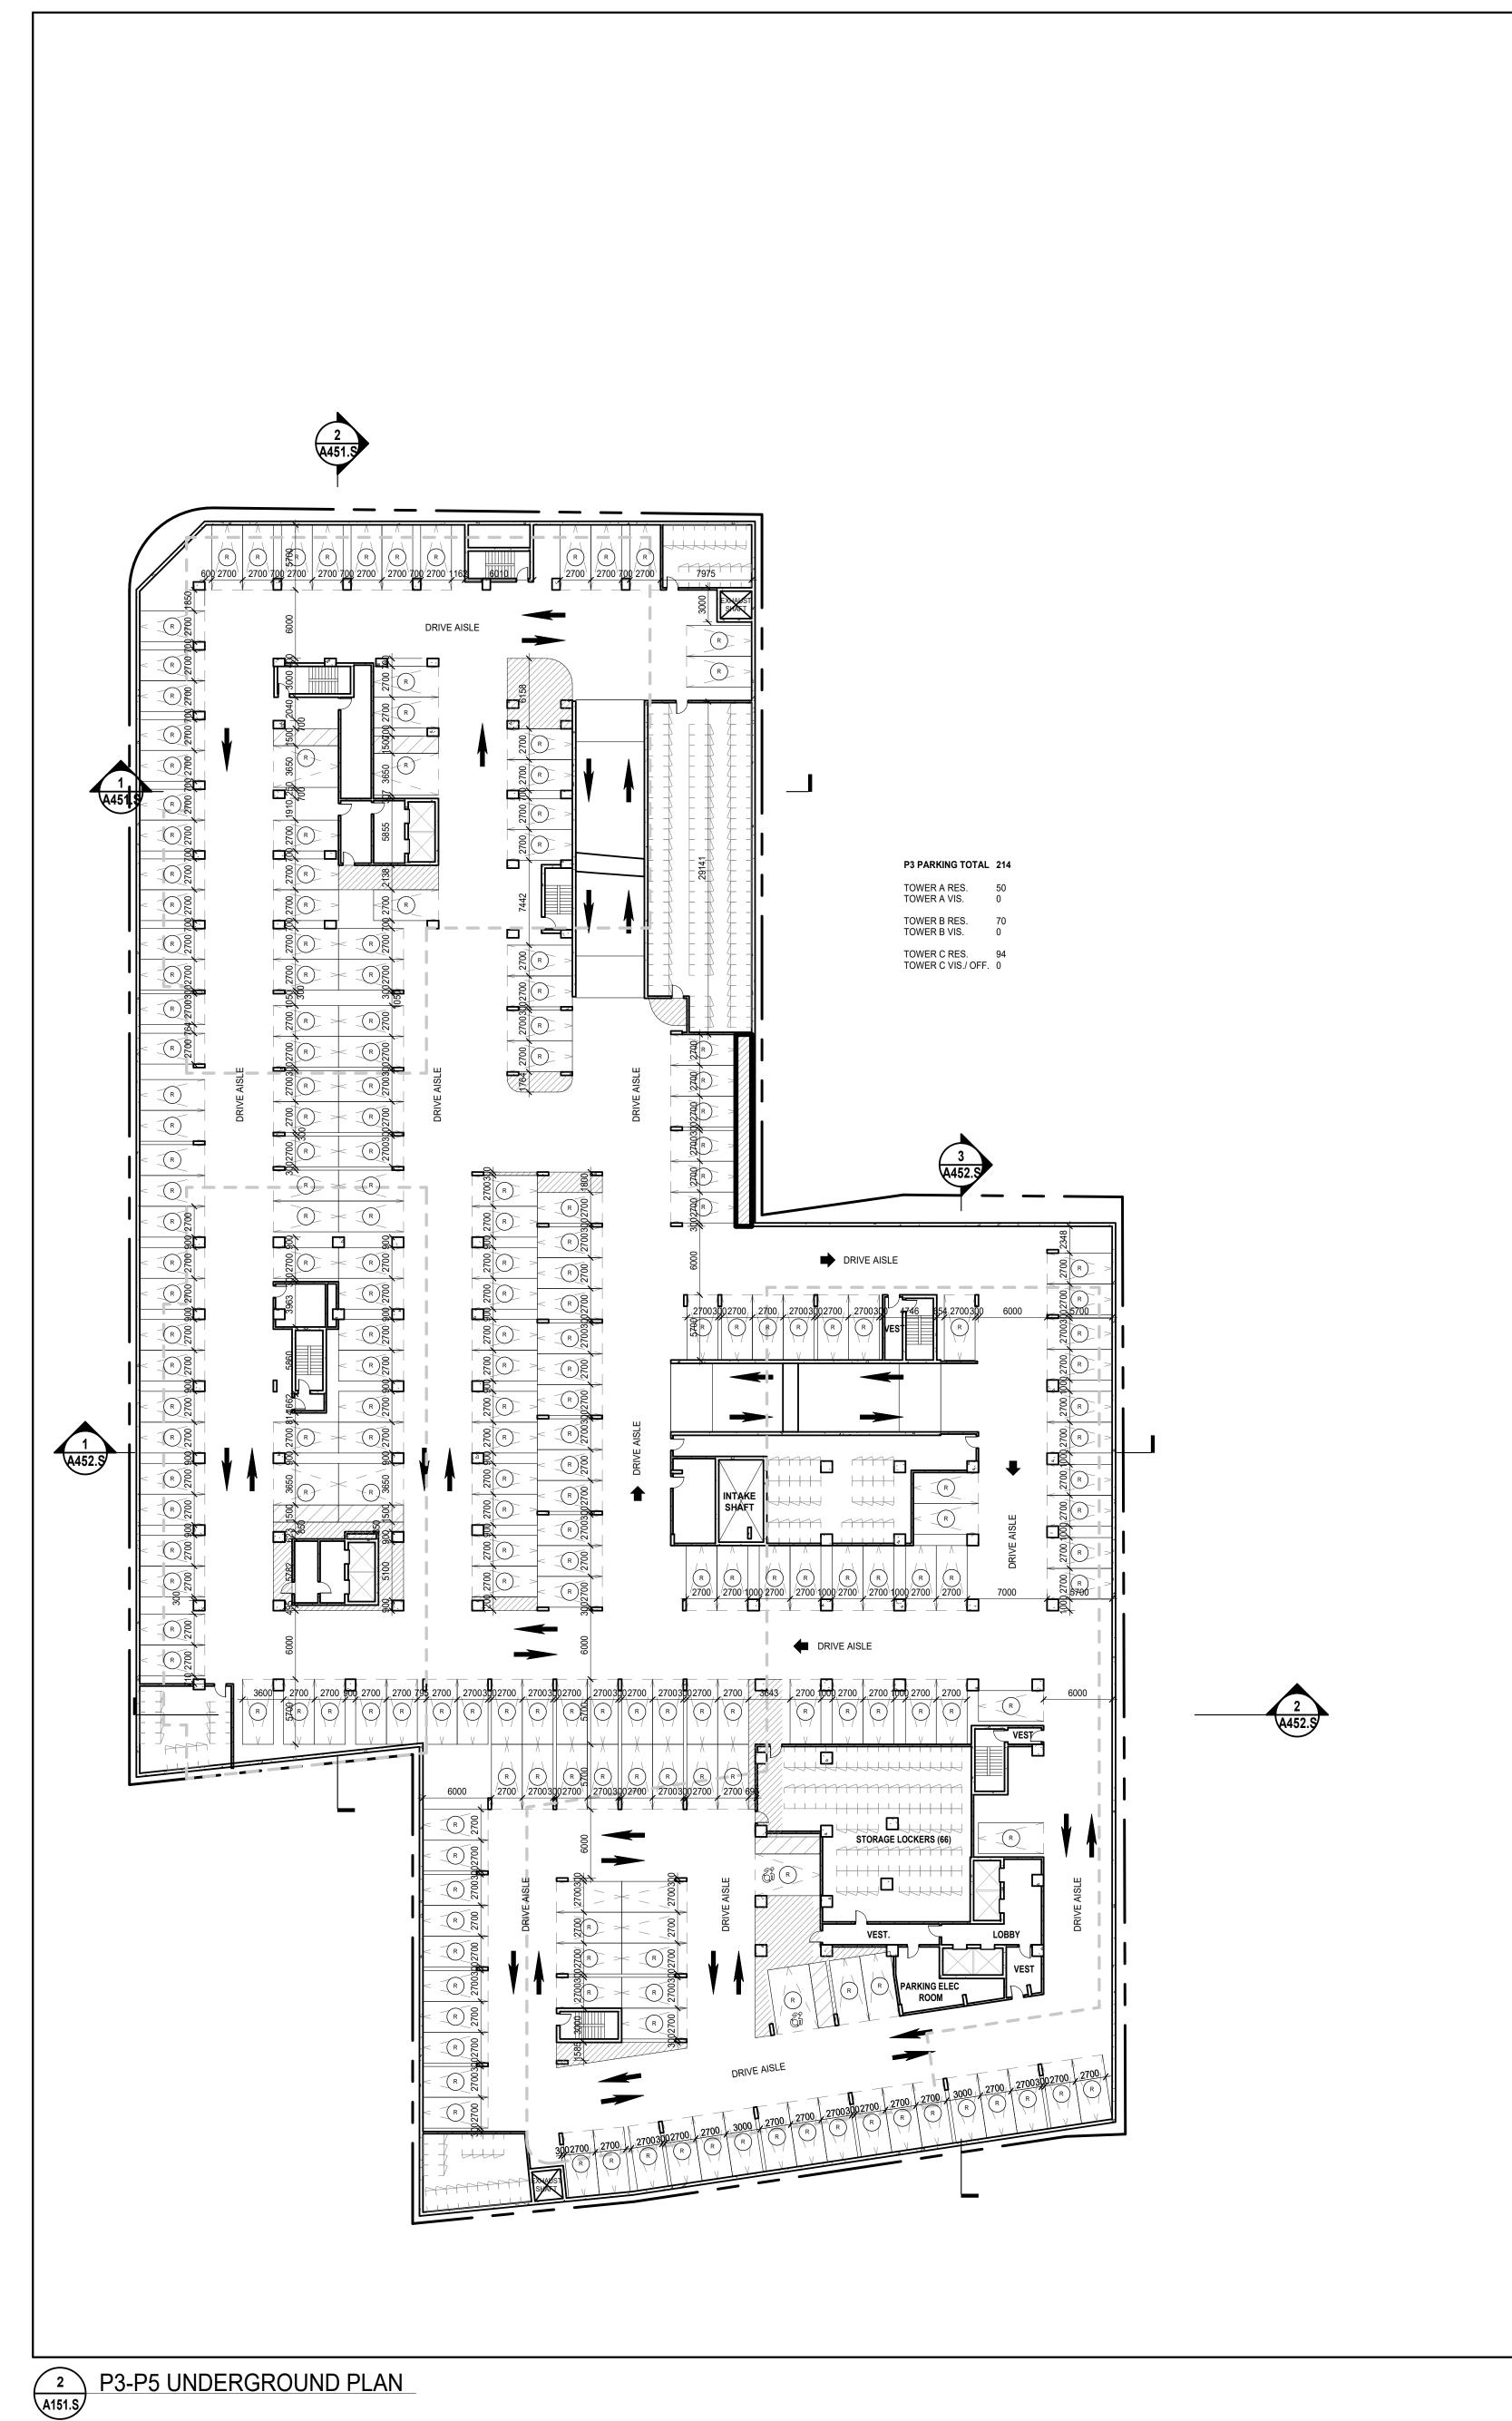

REVISION RECORD

ISSUE RECORD



BDP. Quadrangle

Quadrangle Architects Limited
901 King Street West, Suite 701 Toronto, ON M5V 3H5
t 416 598 1240 www.bdpquadrangle.com


217-227 Cross Avenue and 571-587 Argus Road


Distrikt Developments

19072 1:300 AuthorChecker

P6 and P3-P5 Underground Plans

A151.S

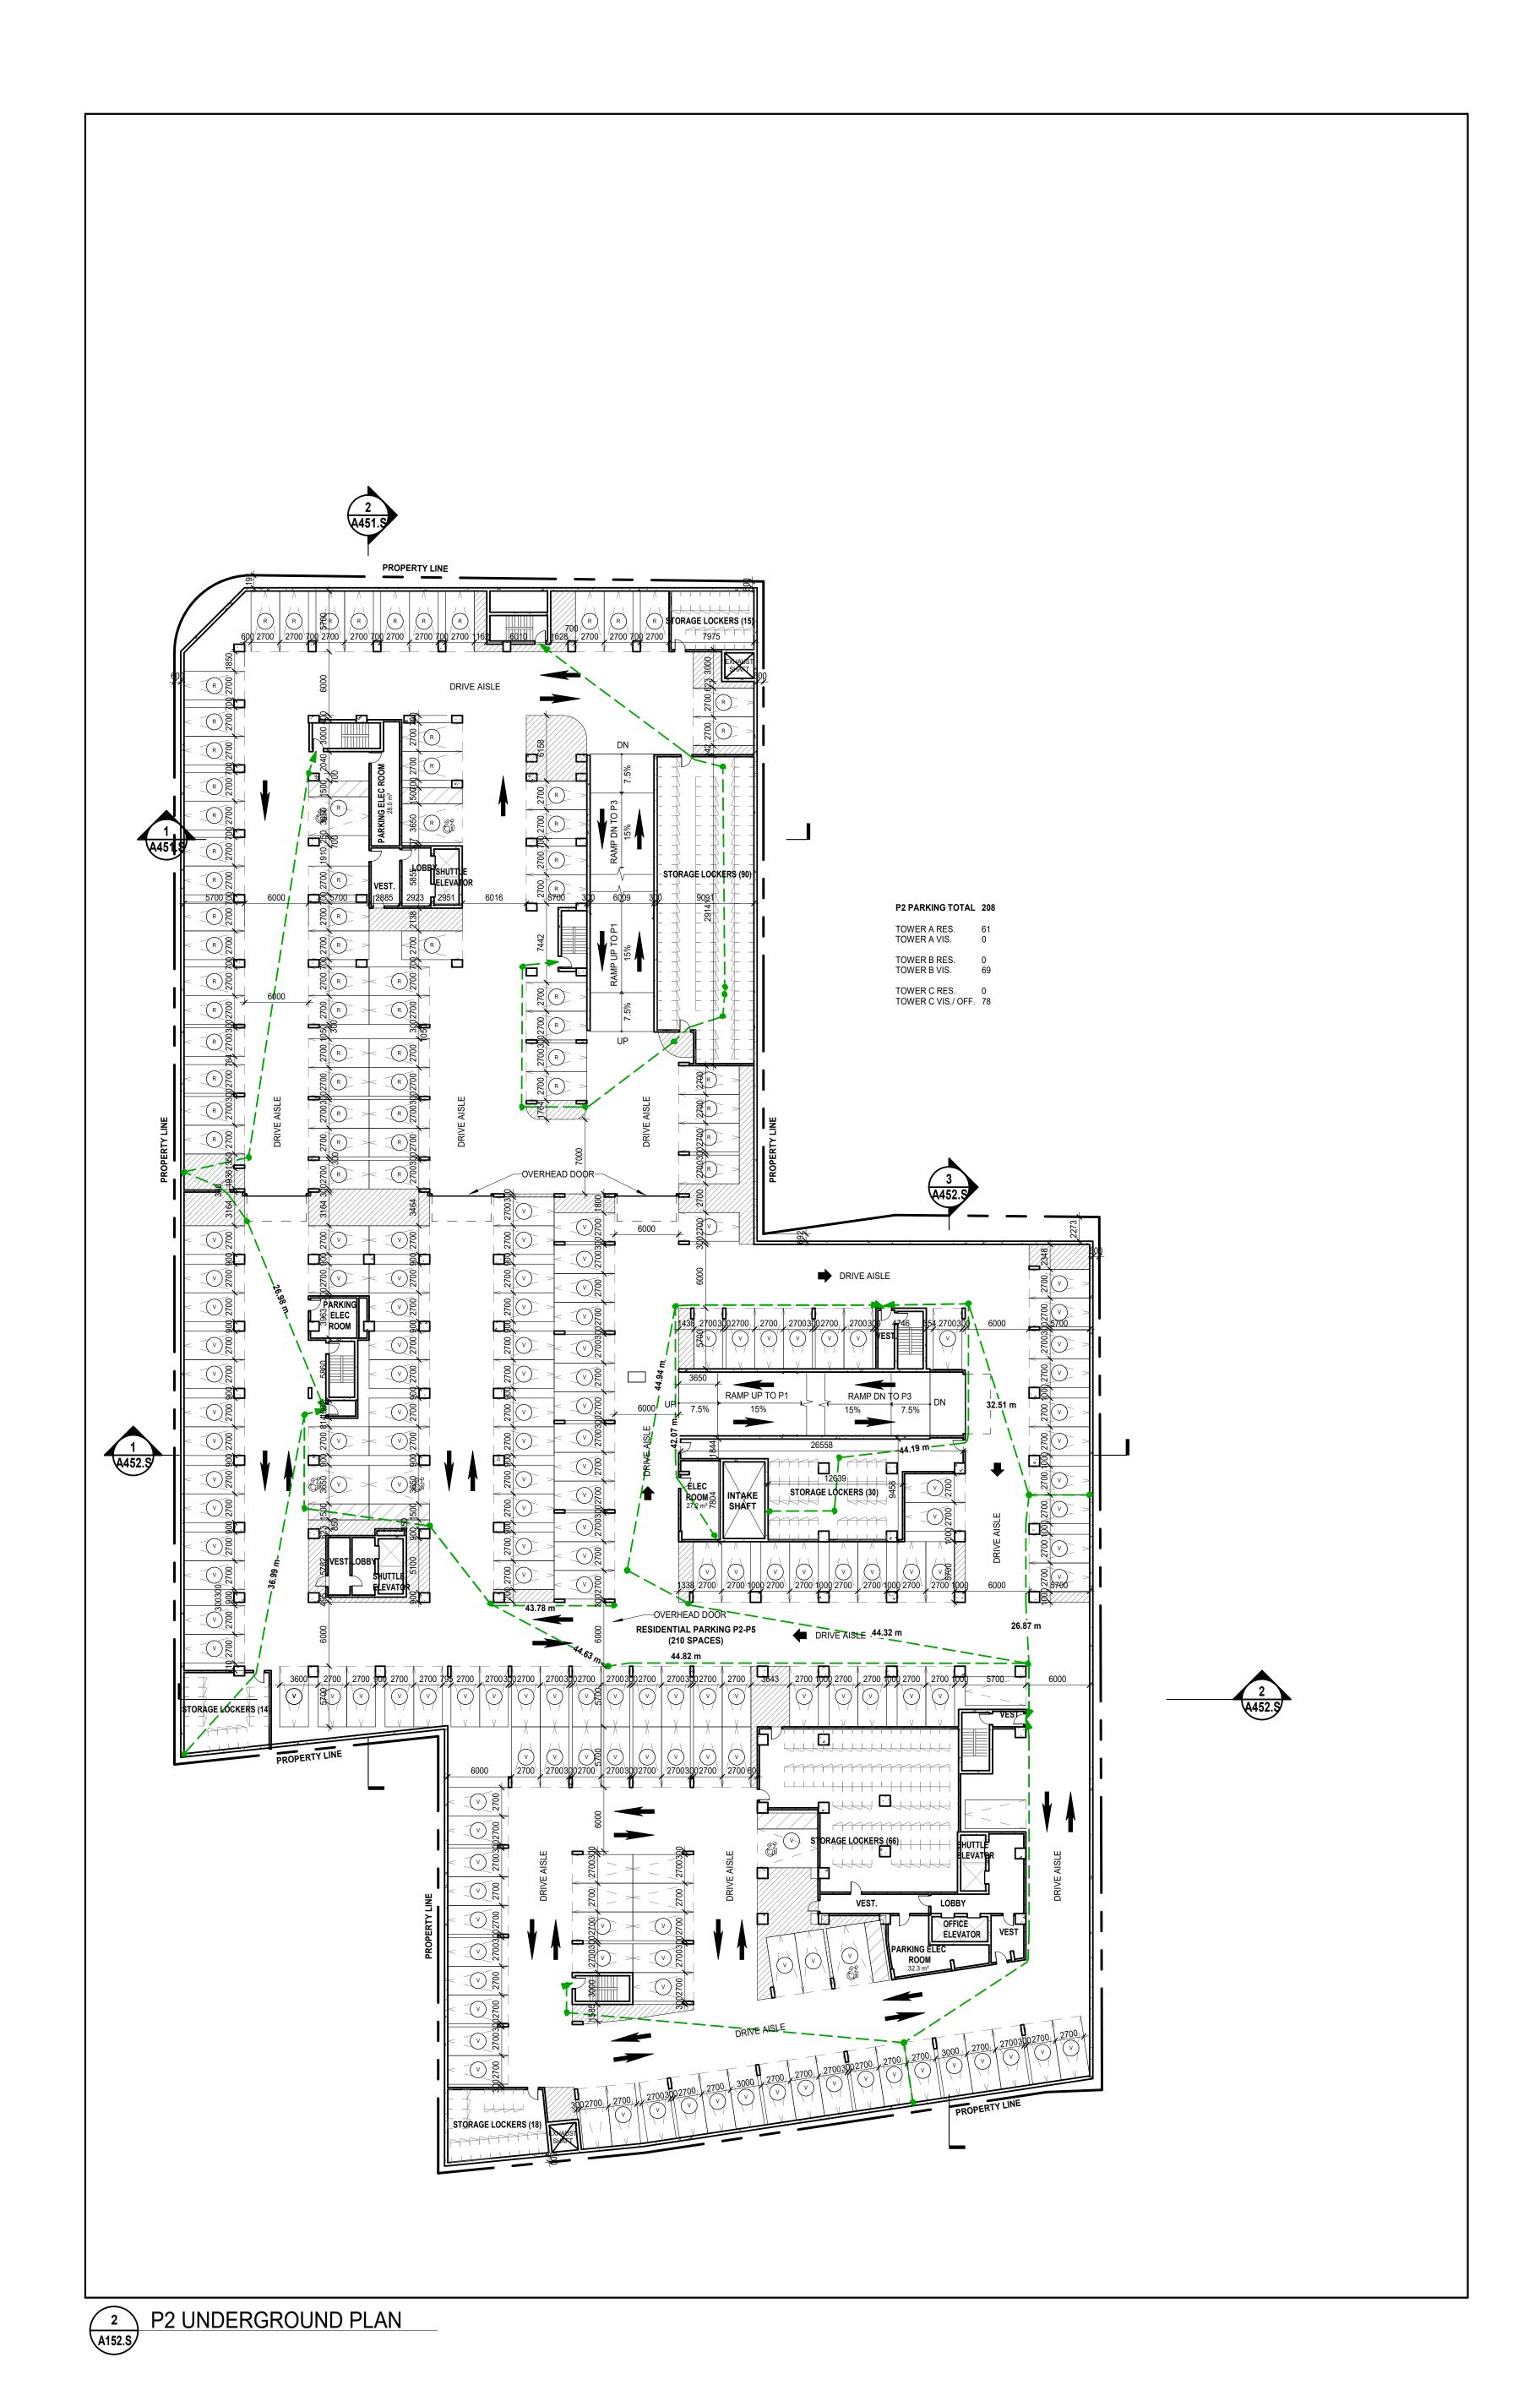

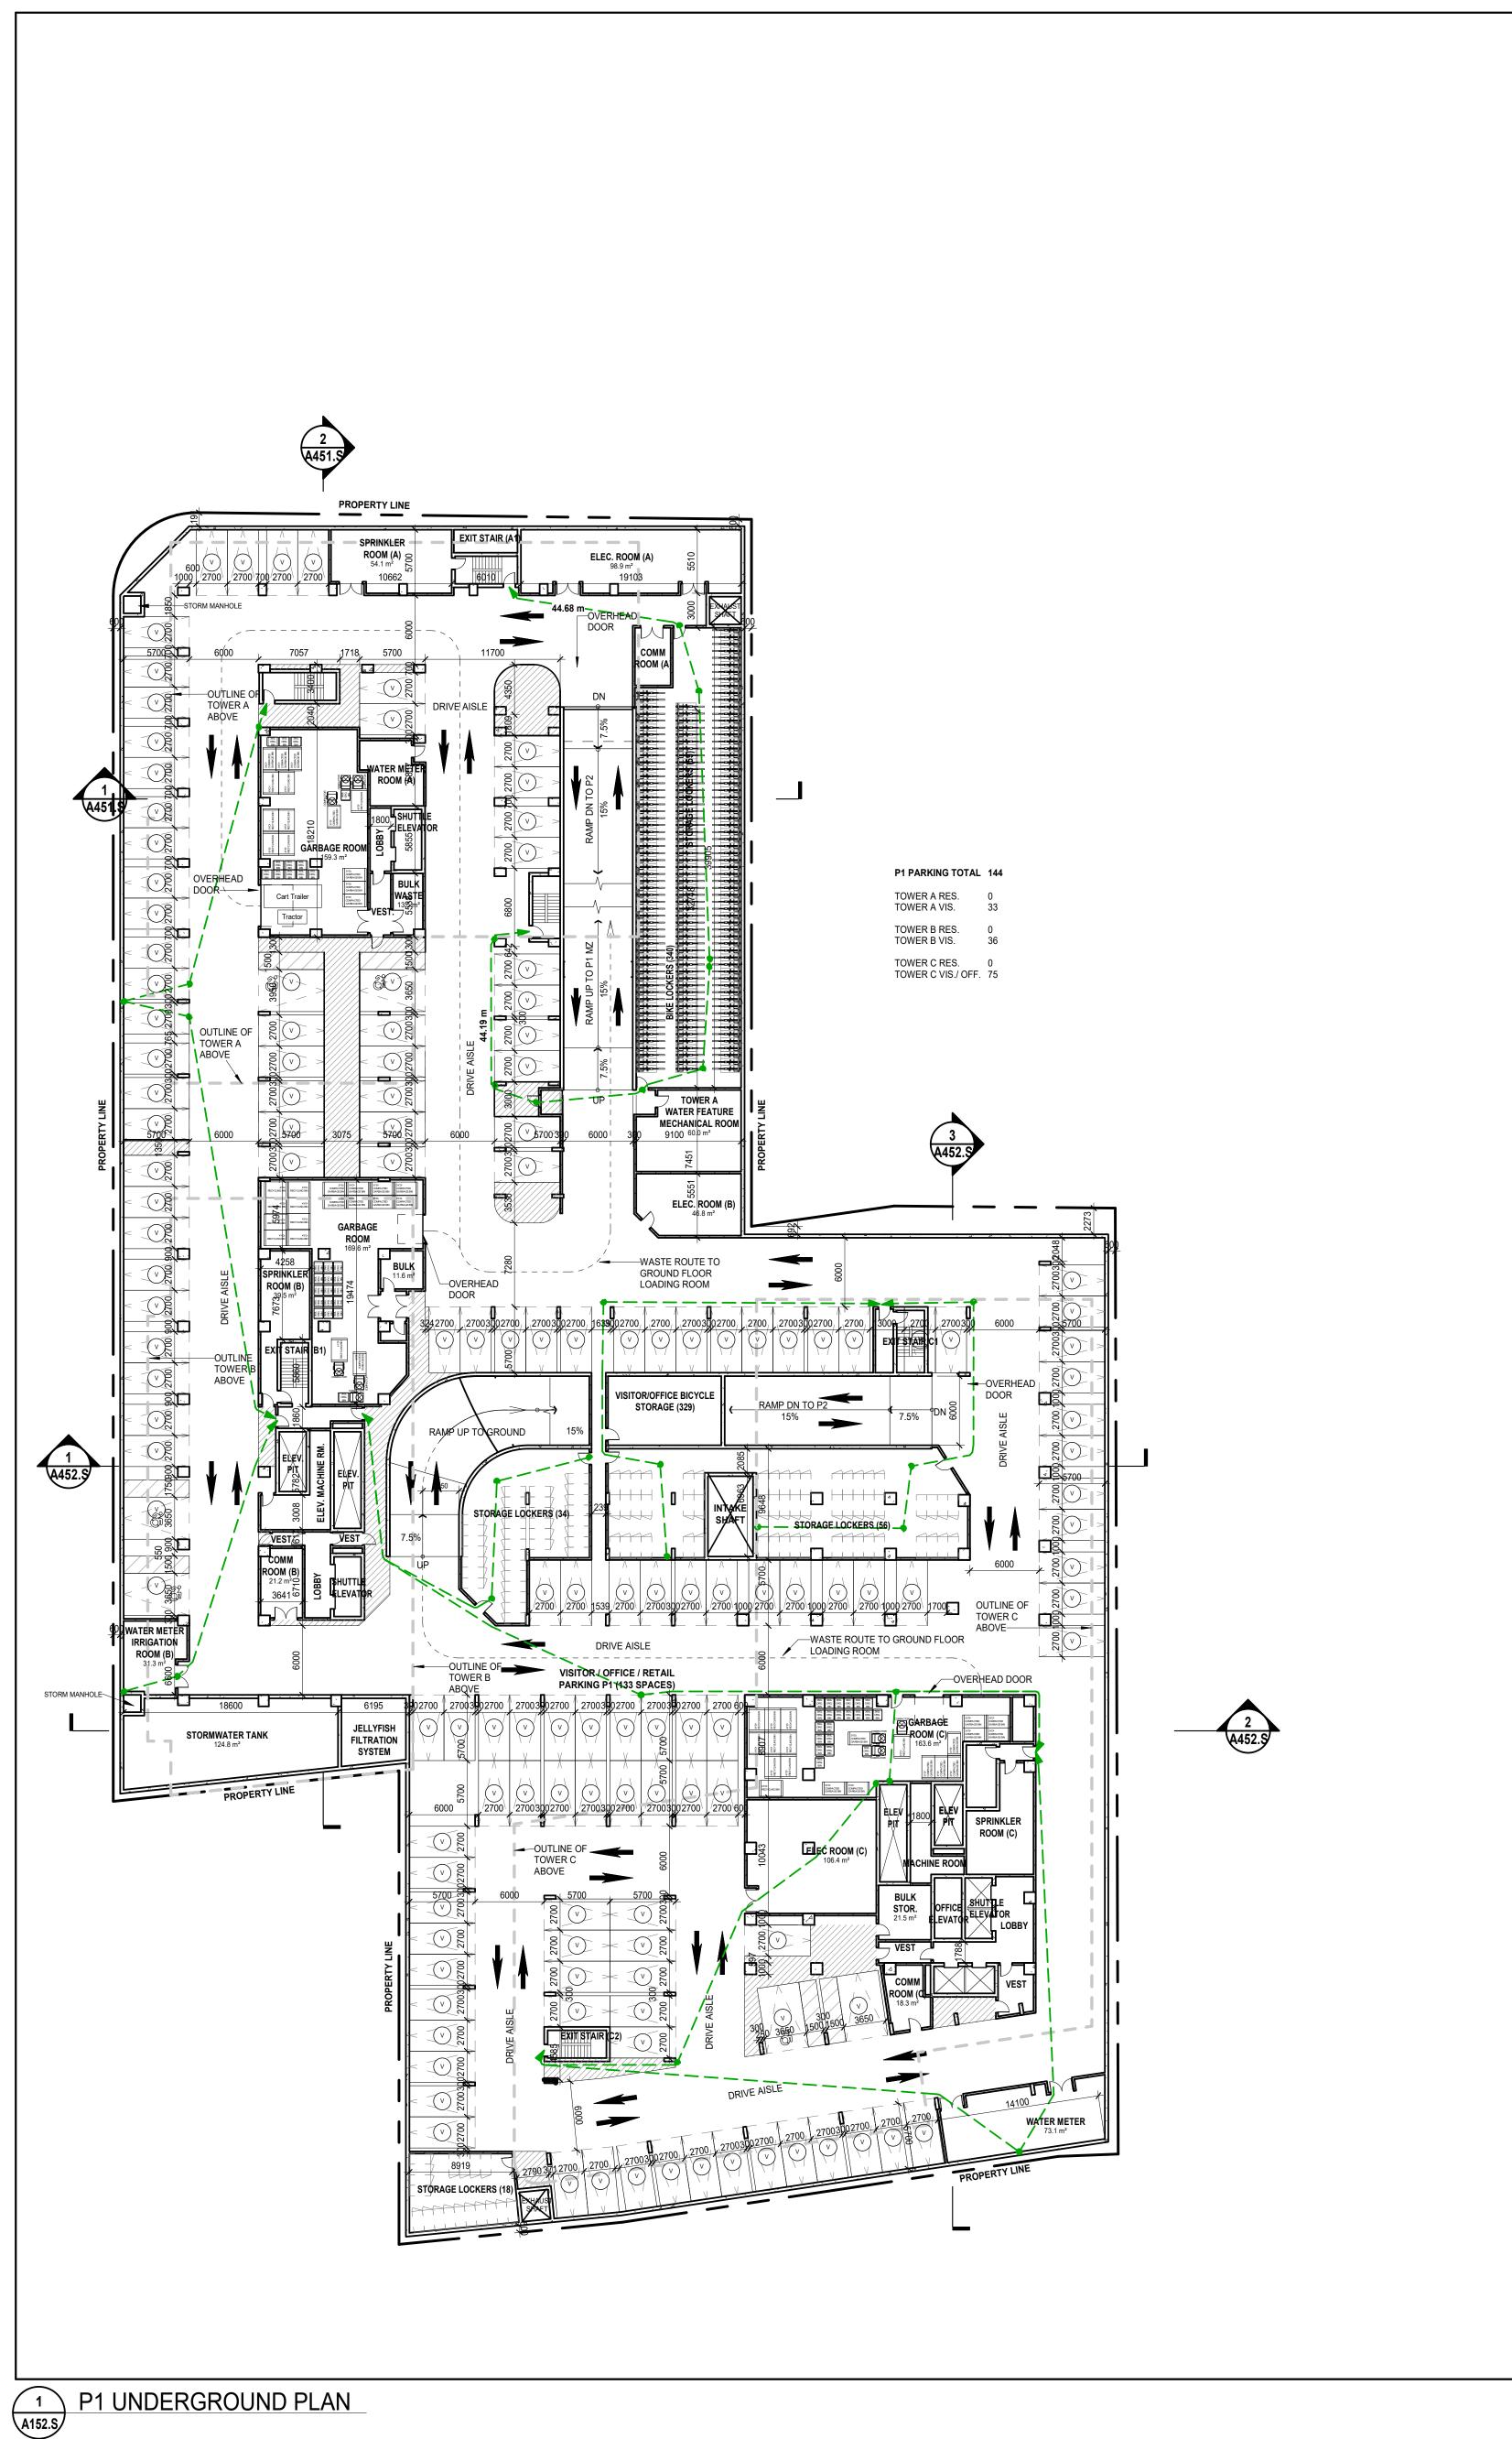

C COMMERCIAL PARKING SPACE

R RESIDENTIAL PARKING SPACE

VISITOR PARKING SPACE

V VISITOR PARKING SPACE

E EXISTING PARKING SPACE

BIKE LOCKER

BIKE PARKING (STACKED)

BIKE PARKING (VERTICAL)

CONVEX MIRROR

ELECTRIC VEHICLE

O^{LS} LIGHT STANDARD

FIRE-RATED BULKHEAD

2900 / \ 00

TYPICAL ONE SIDE OBSTRUCTRED

3900 3400

ACCESSIBLE ACCESSIBLE


ACCESSIBLE VISITOR - TYPE A

ate No. Description

REVISION RECORD

No. Description

2023-10-01 Issued for Rezoning & OLT 2022-04-19 Issued for Rezoning



BDP. Quadrangle

Quadrangle Architects Limited
901 King Street West, Suite 701 Toronto, ON M5V 3H5
t 416 598 1240 www.bdpquadrangle.com

217-227 Cross Avenue and 571-587 Argus Road

Distrikt Developments


19072 1:250 PROJECT SCALE

P2 and P1 Underground Plan

A152.S

Note: This drawing is the property of the Architect and may not be reproduced or used without the expressed consent of the Architect. The Contractor is responsible for checking and verifying all levels and dimensions and shall report all discrepancies to the Architect and obtain clarification prior to commencing work.

UI KVE DRAWN REVIEWED

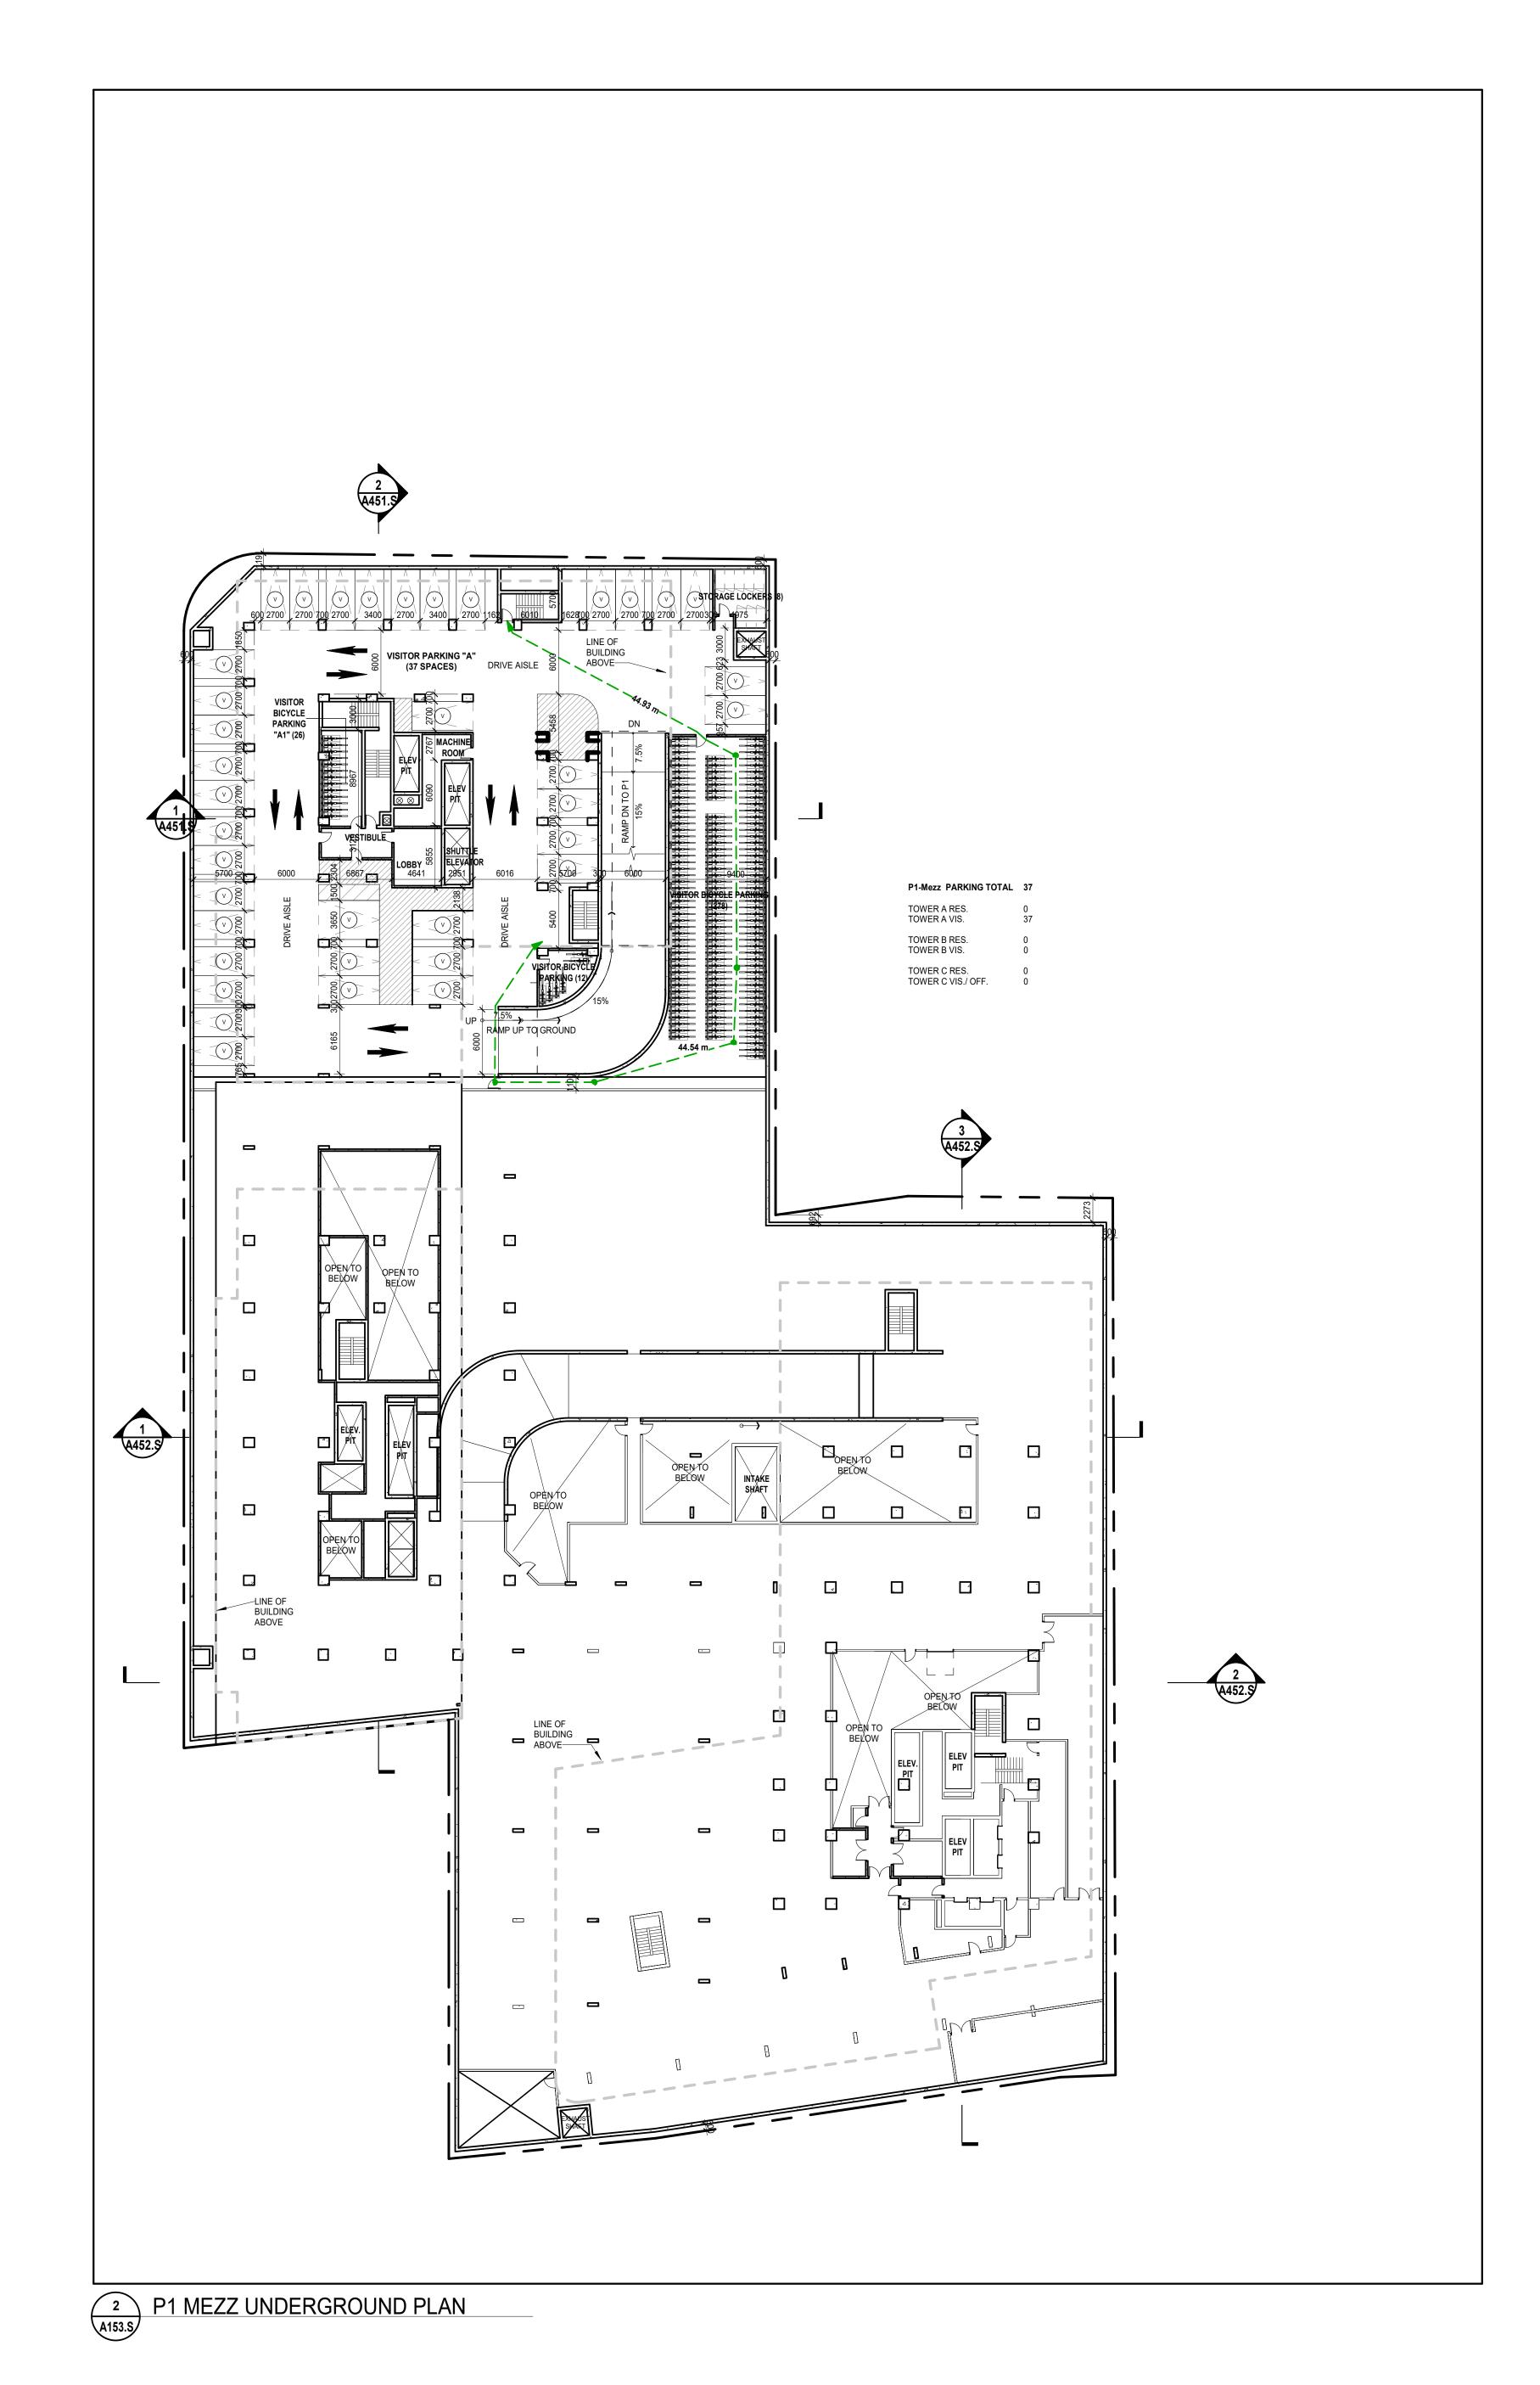

PARKING NOTES: 1. MINIMUM PARKING SPACE SIZES (UNLESS OTHERWISE NOTED):
- 2600mm WIDE X 5600mm LONG (NO SIDES OBSTRUCTED)
- 2900mm WIDE X 5600mm LONG (ONE SIDE OBSTRUCTED)
- 3200mm WIDE X 5600mm LONG (TWO SIDES OBSTRUCTED) 2. MAINTAIN MININUM DRIVE AISLE WIDTH OF 6000mm UNLESS OTHERWISE NOTED. 3. MAINTAIN MINIMUM HEADROOM CLEARANCE OF 2100mm THROUGHOUT. PARKING LEGEND: C COMMERCIAL PARKING SPACE R RESIDENTIAL PARKING SPACE V VISITOR PARKING SPACE

E EXISTING PARKING SPACE BIKE LOCKER BIKE PARKING (STACKED)

BIKE PARKING (VERTICAL) CONVEX MIRROR


ELECTRIC VEHICLE OLS LIGHT STANDARD

FIRE-RATED BULKHEAD

ACCESSIBLE ACCESSIBLE VISITOR - TYPE B ACCESSIBLE

No. Description REVISION RECORD

2023-10-01 Issued for Rezoning & OLT ISSUE RECORD



BDP. Quadrangle

Quadrangle Architects Limited
901 King Street West, Suite 701 Toronto, ON M5V 3H5
t 416 598 1240 www.bdpquadrangle.com

217-227 Cross Avenue and 571-587 Argus Road


Distrikt Developments


19072 1:250 PROJECT SCALE

P1 Mezzanine Underground Plan

UI KVE DRAWN REVIEWED

A153.S

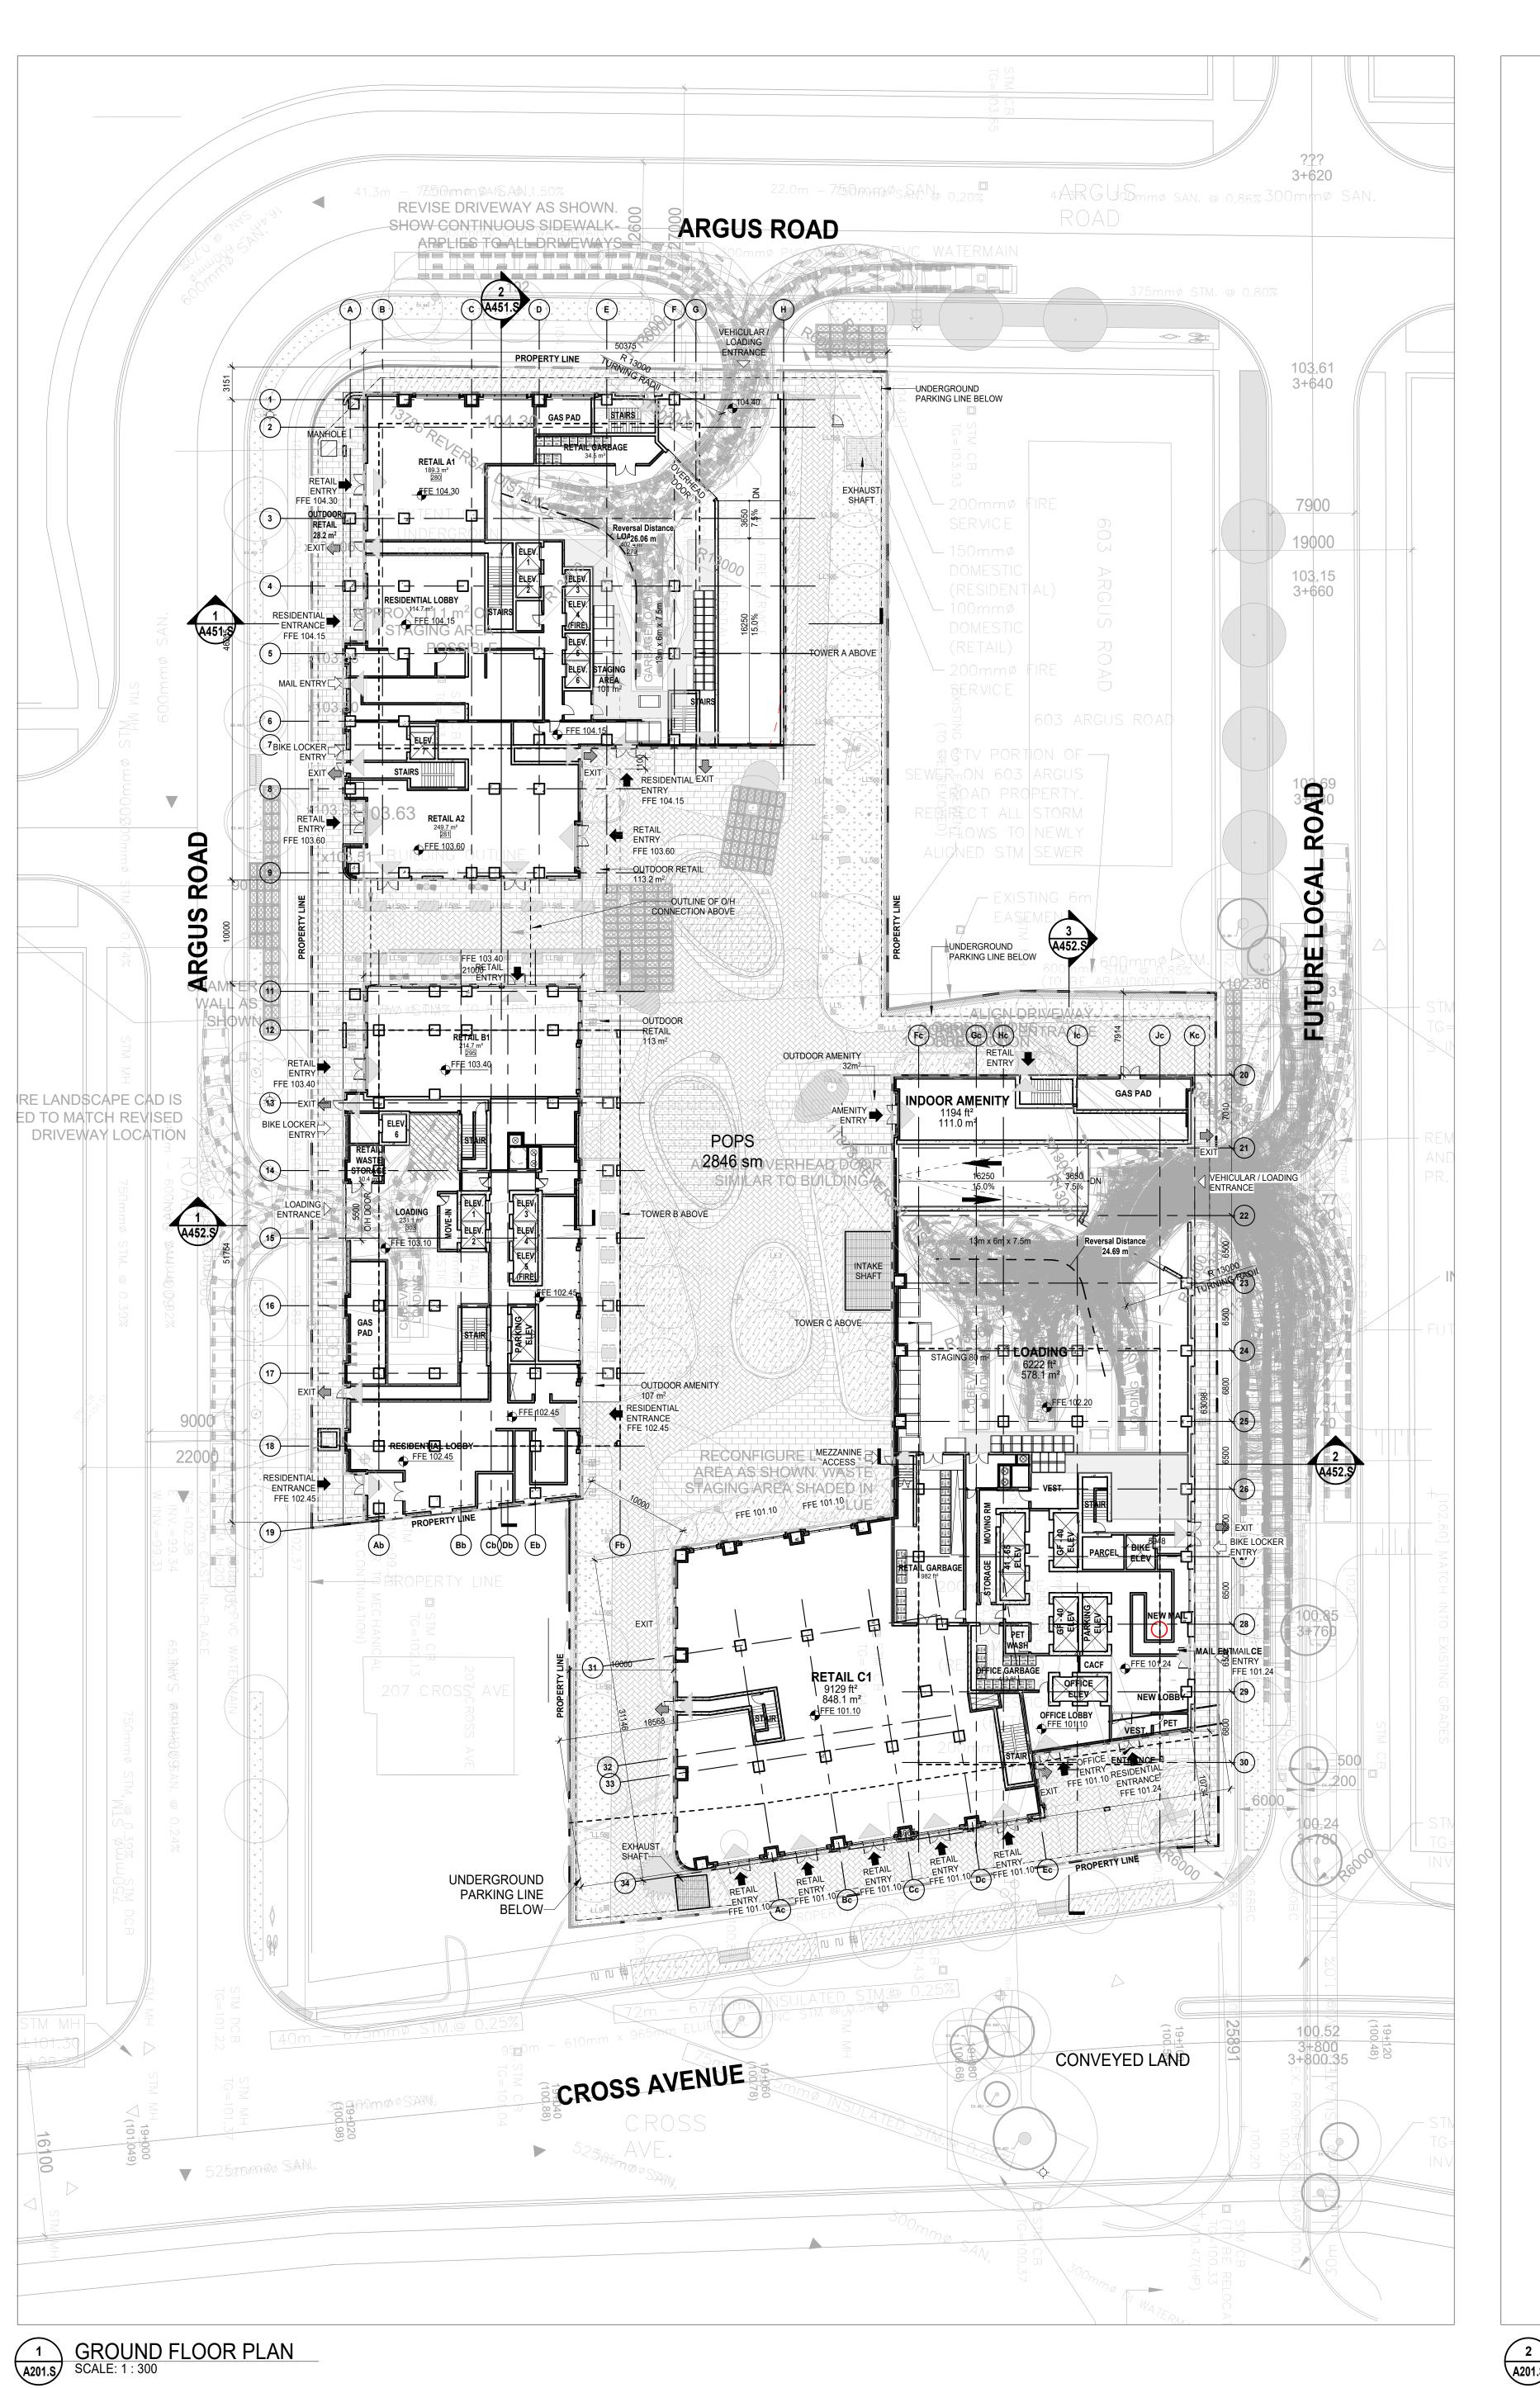

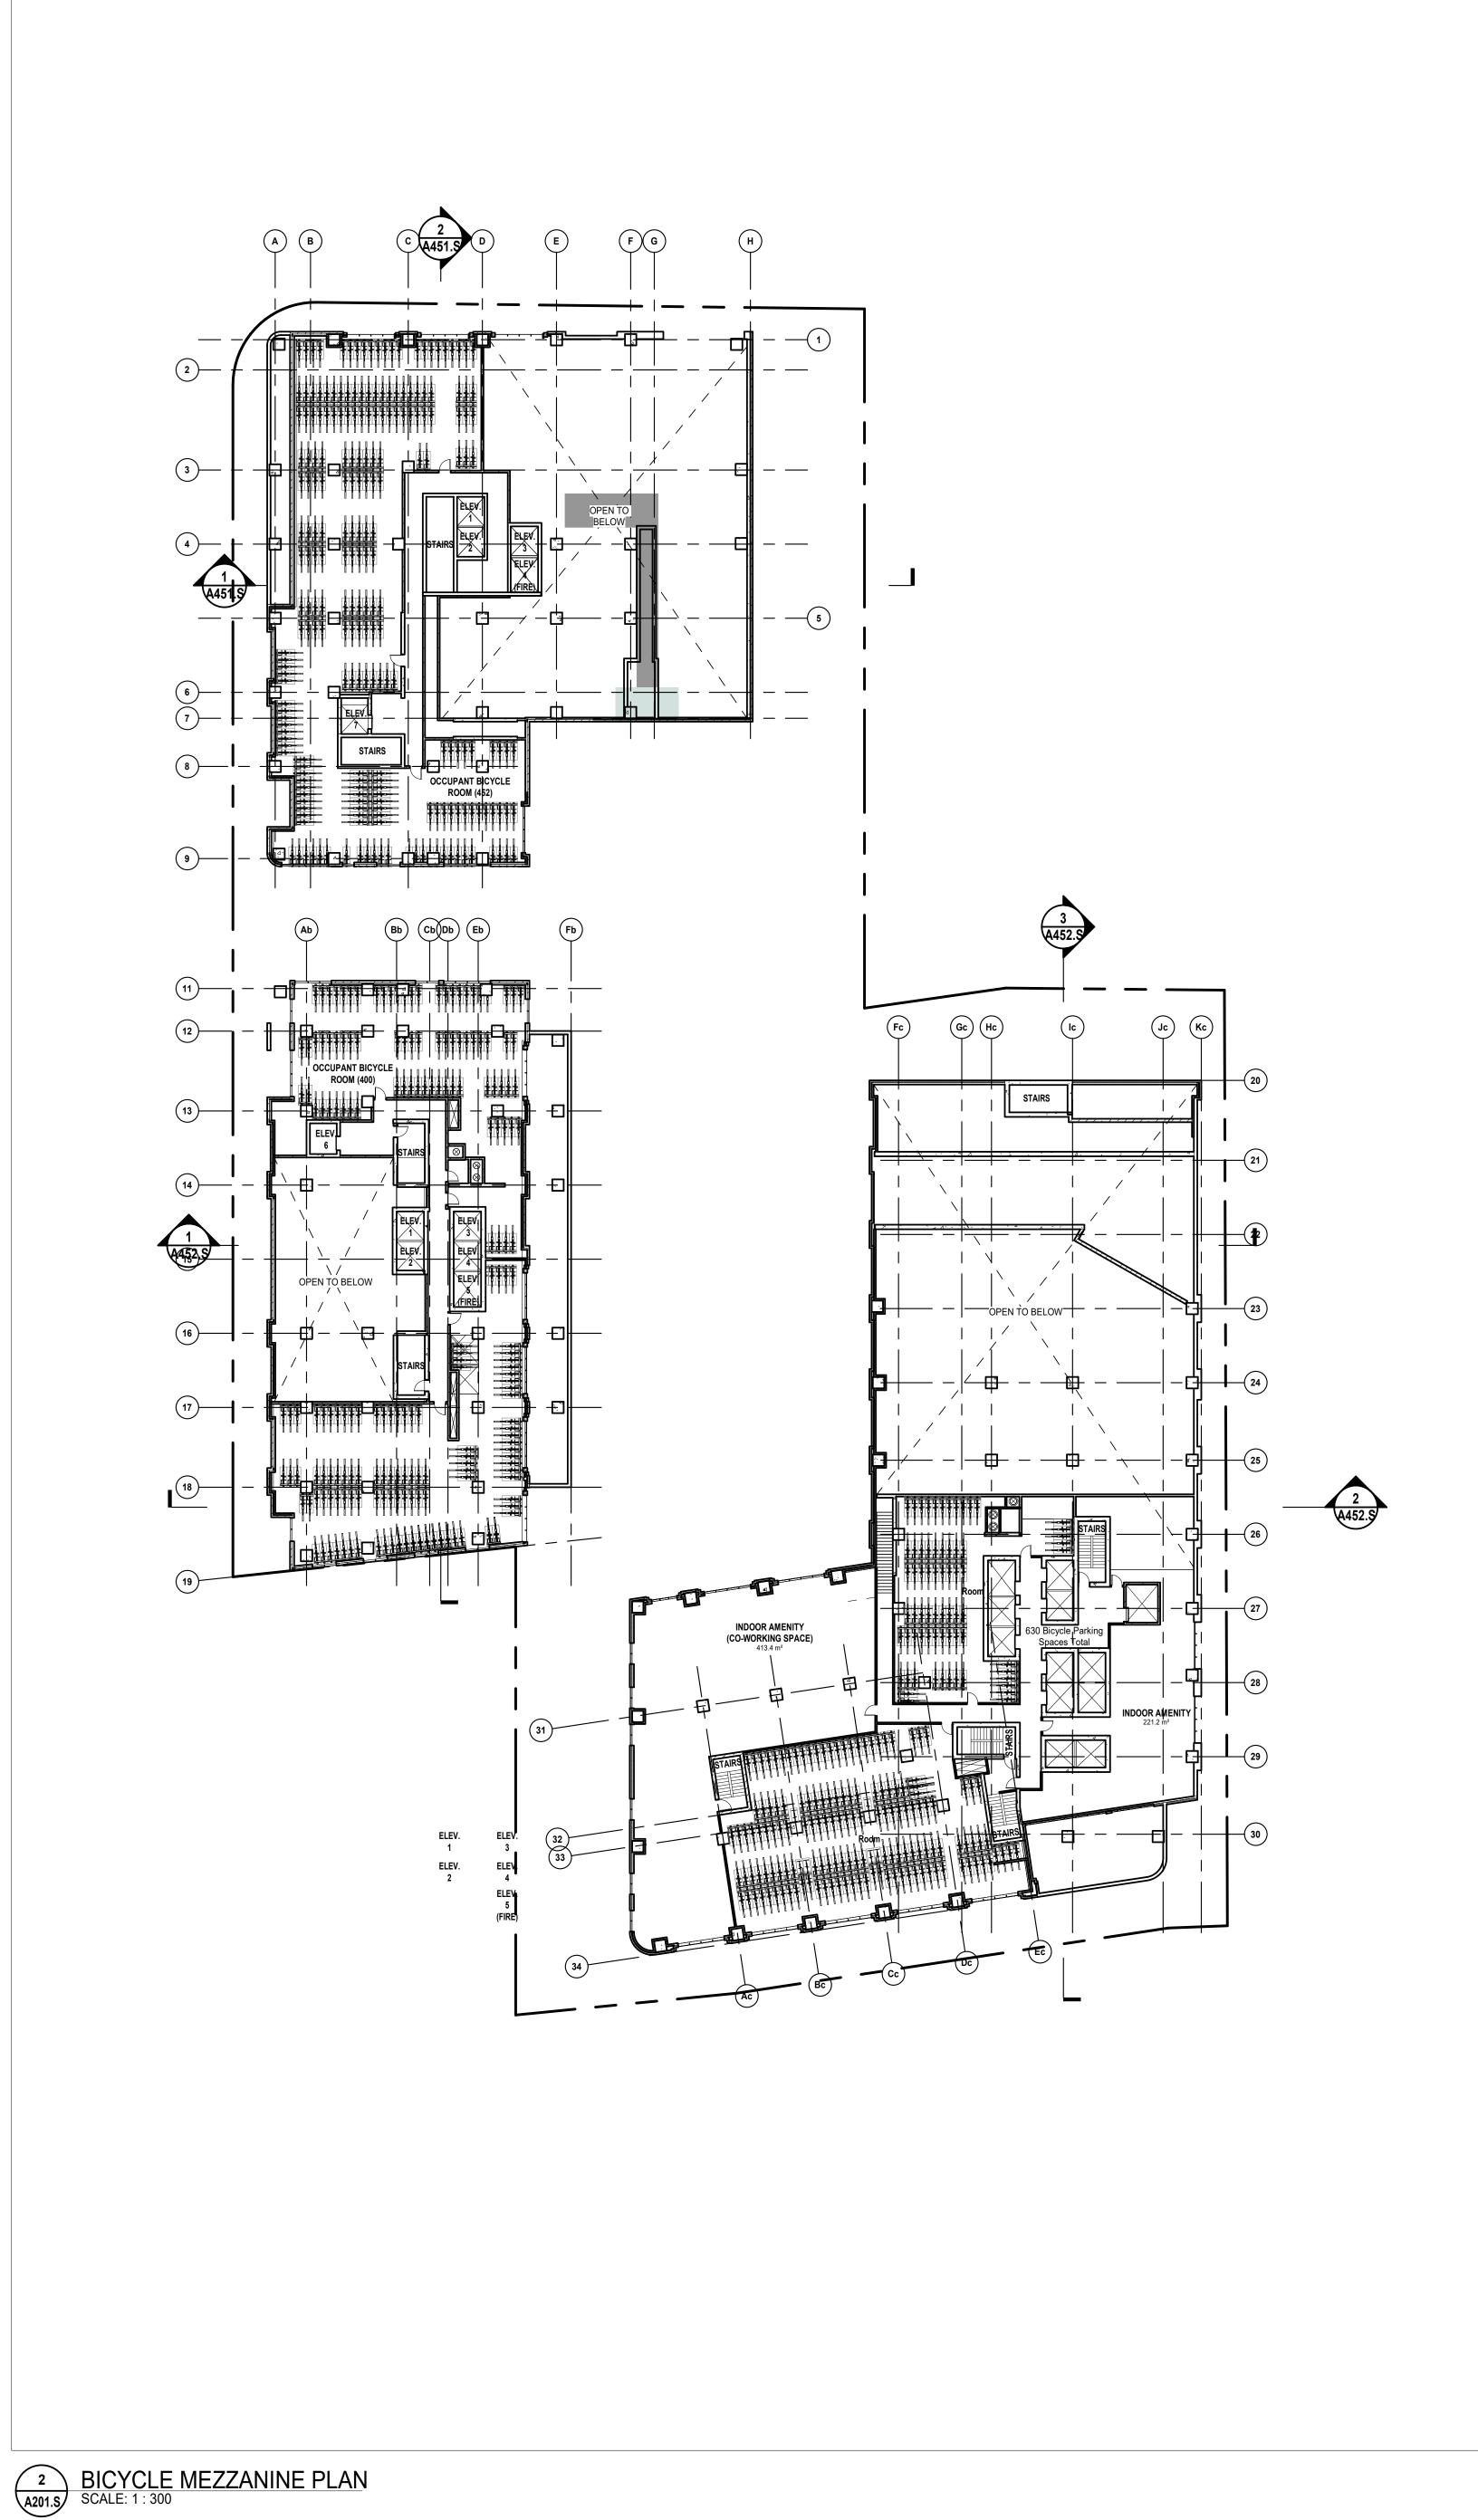


Date No. Description

Date No. Description

REVISION RECORD

ORAN,

2023-10-01 Issued for Rezoning & OLT 2022-04-19 Issued for Rezoning



BDP. Quadrangle

Quadrangle Architects Limited
901 King Street West, Suite 701 Toronto, ON M5V 3H5
t 416 598 1240 www.bdpquadrangle.com


217-227 Cross Avenue and
571-587 Argus Road


Distrikt Developments

19072 1:300 EG KVE
PROJECT SCALE DRAWN REVIEWED

Ground and Bicycle Mezzanine Plans

A201.S

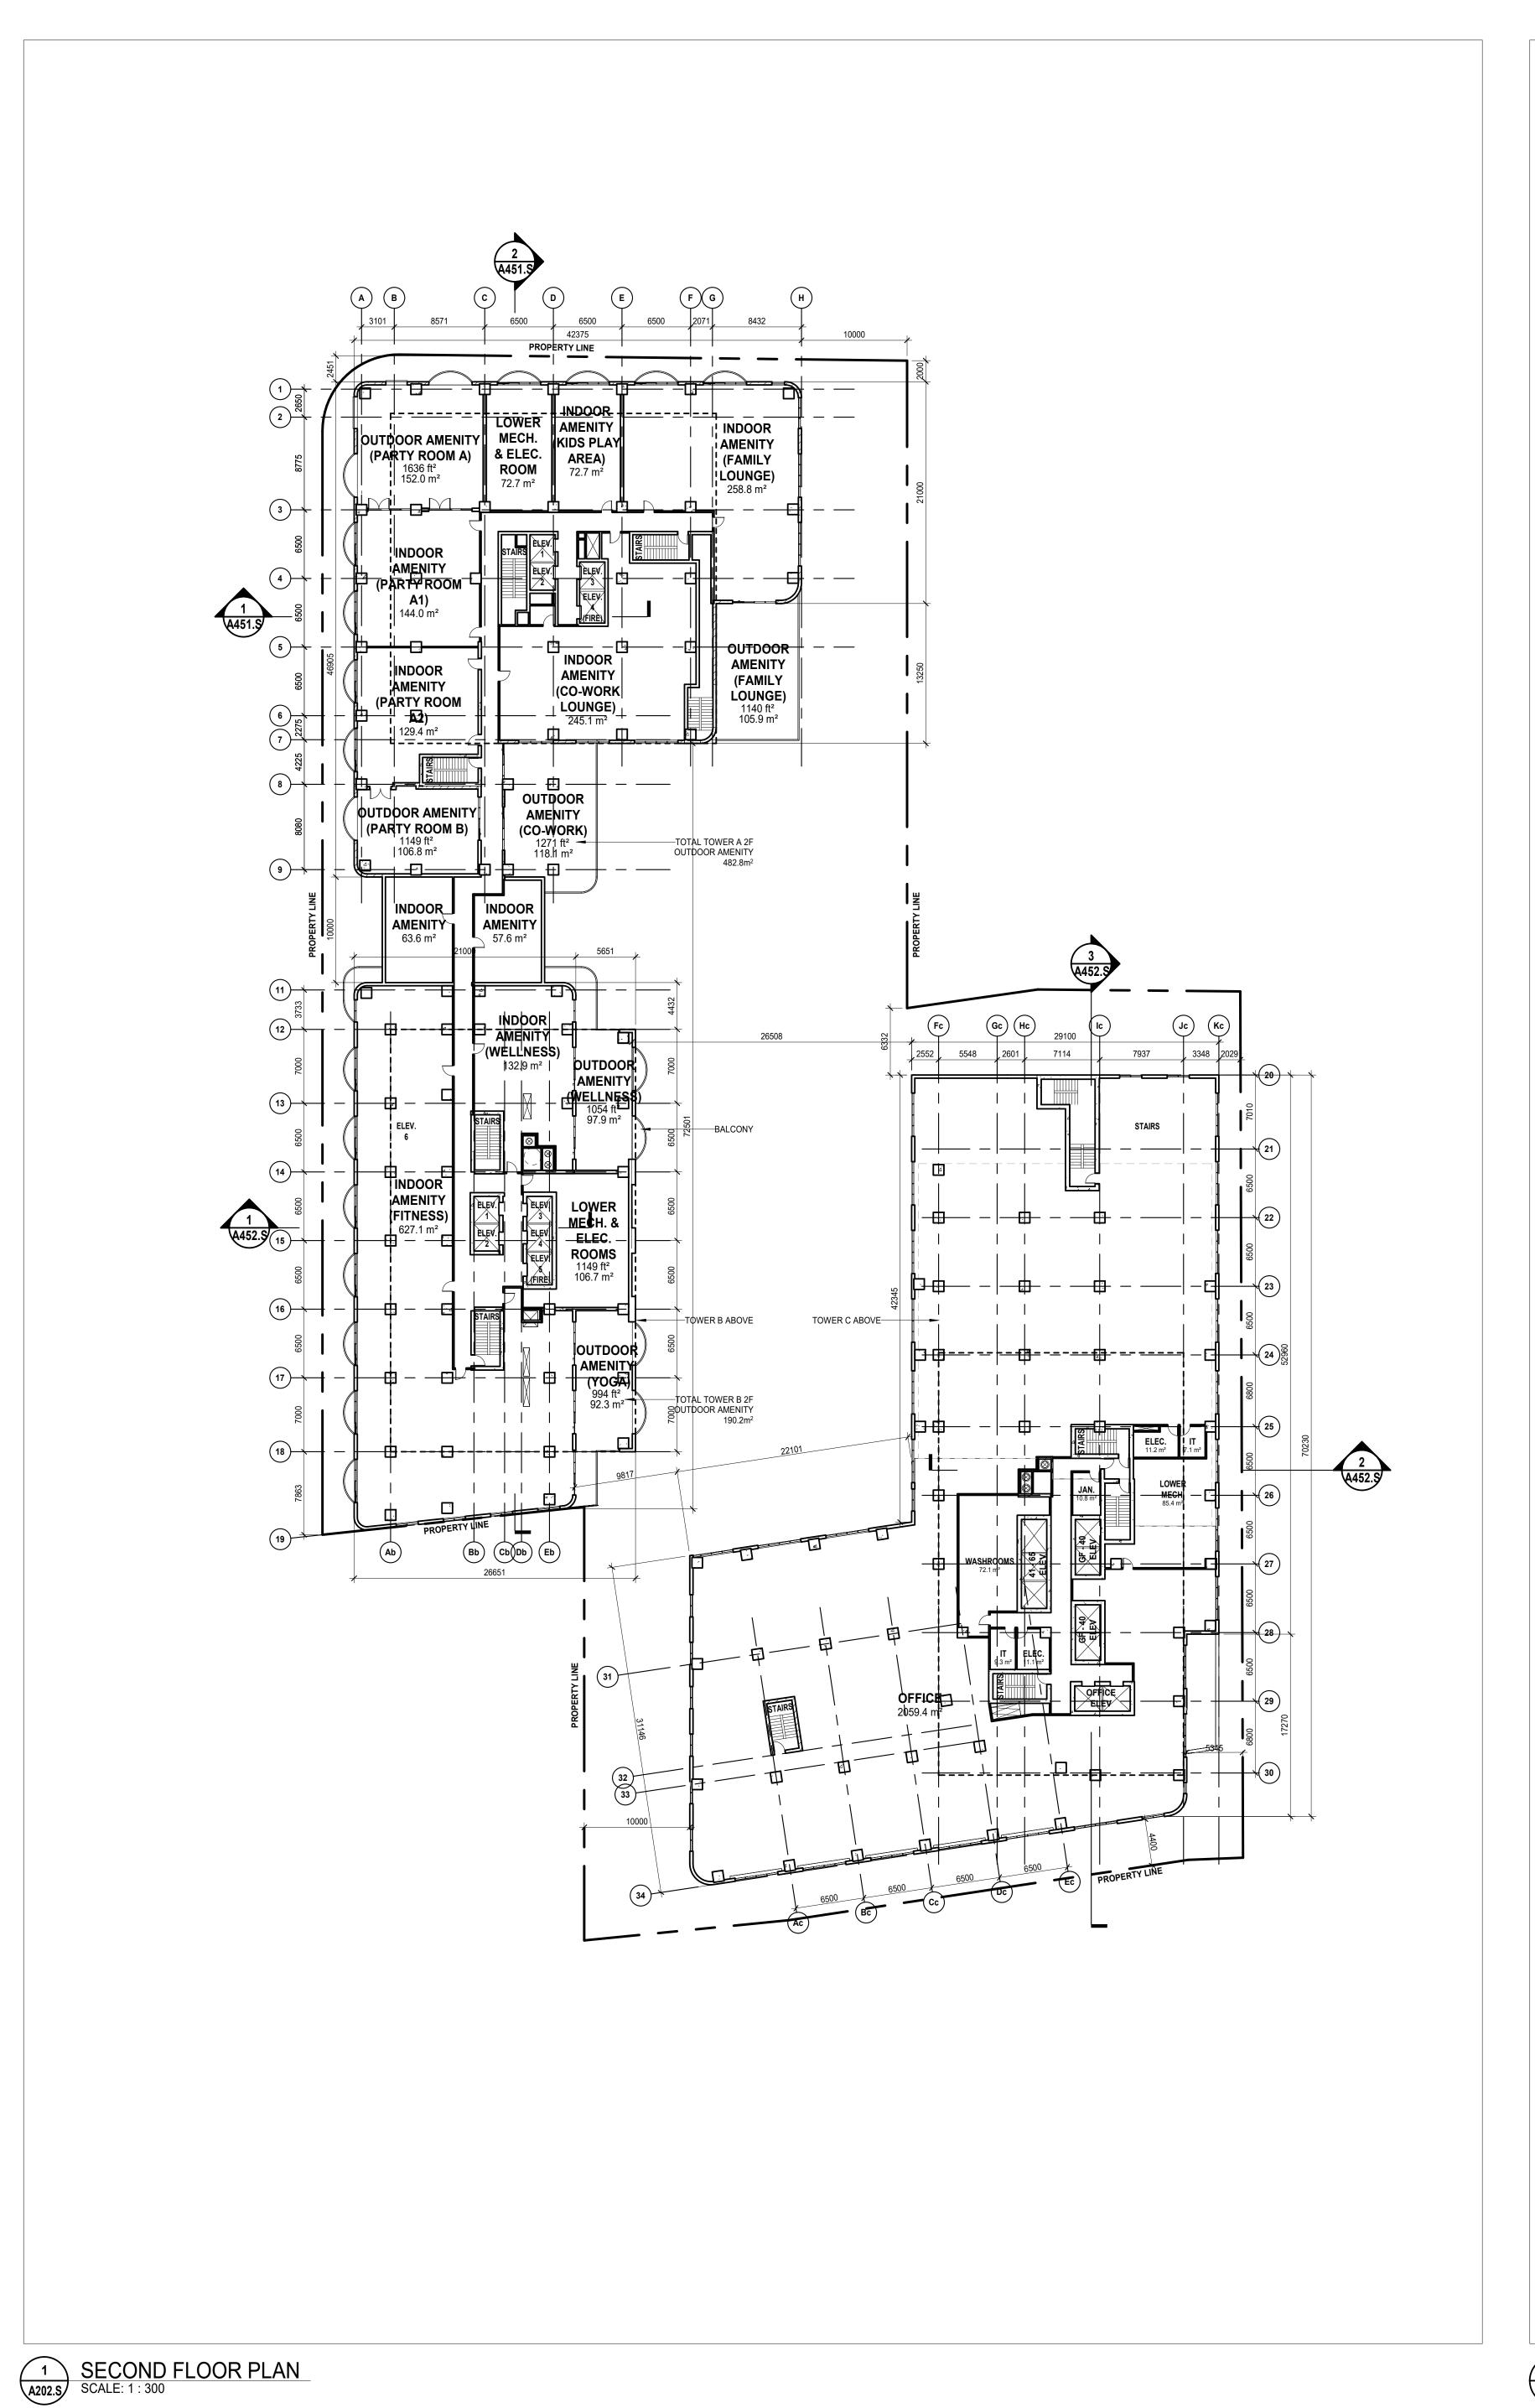

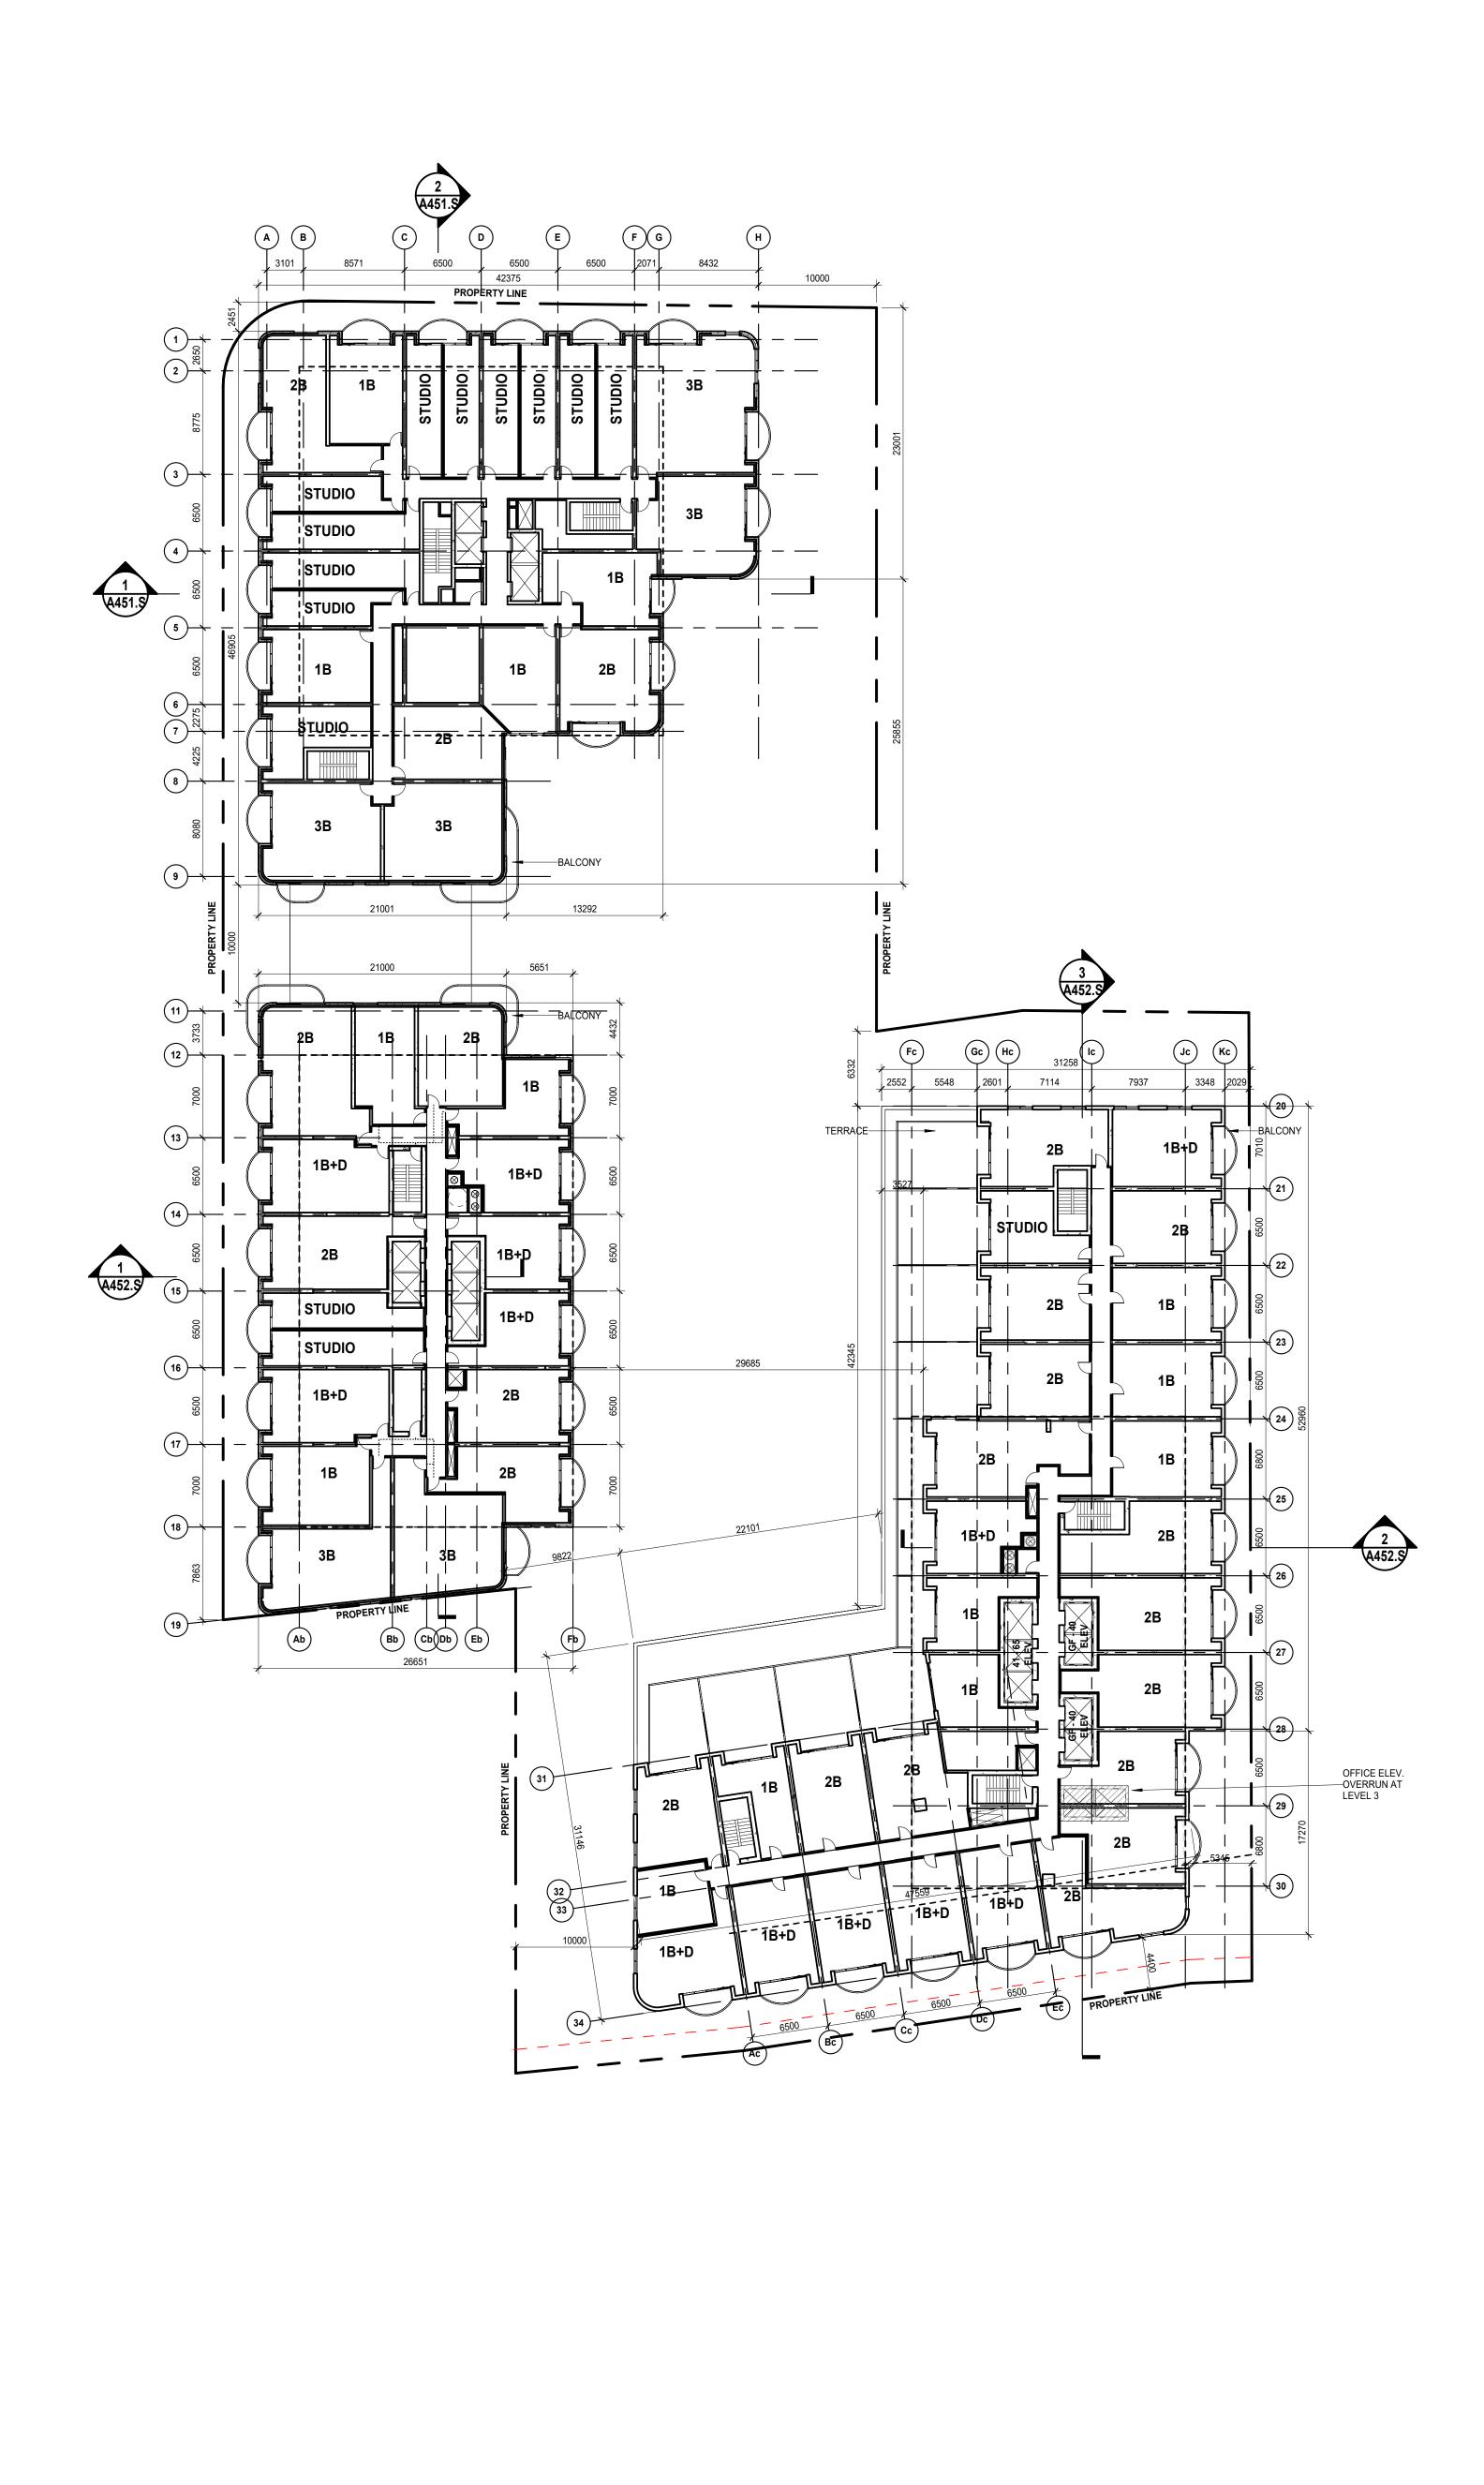


Date No. Description

Date No. Description

REVISION RECORD

2023-10-01 Issued for Rezoning & OLT
2022-04-19 Issued for Rezoning
ISSUERECORD



BDP. Quadrangle

Quadrangle Architects Limited
901 King Street West, Suite 701 Toronto, ON M5V 3H5
t 416 598 1240 www.bdpquadrangle.com


217-227 Cross Avenue and 571-587 Argus Road


Distrikt Developments

19072 1:300 DC KVE
PROJECT SCALE DRAWN REVIEWED

Second and Typical Third to Sixth Floor Plans

A202.S

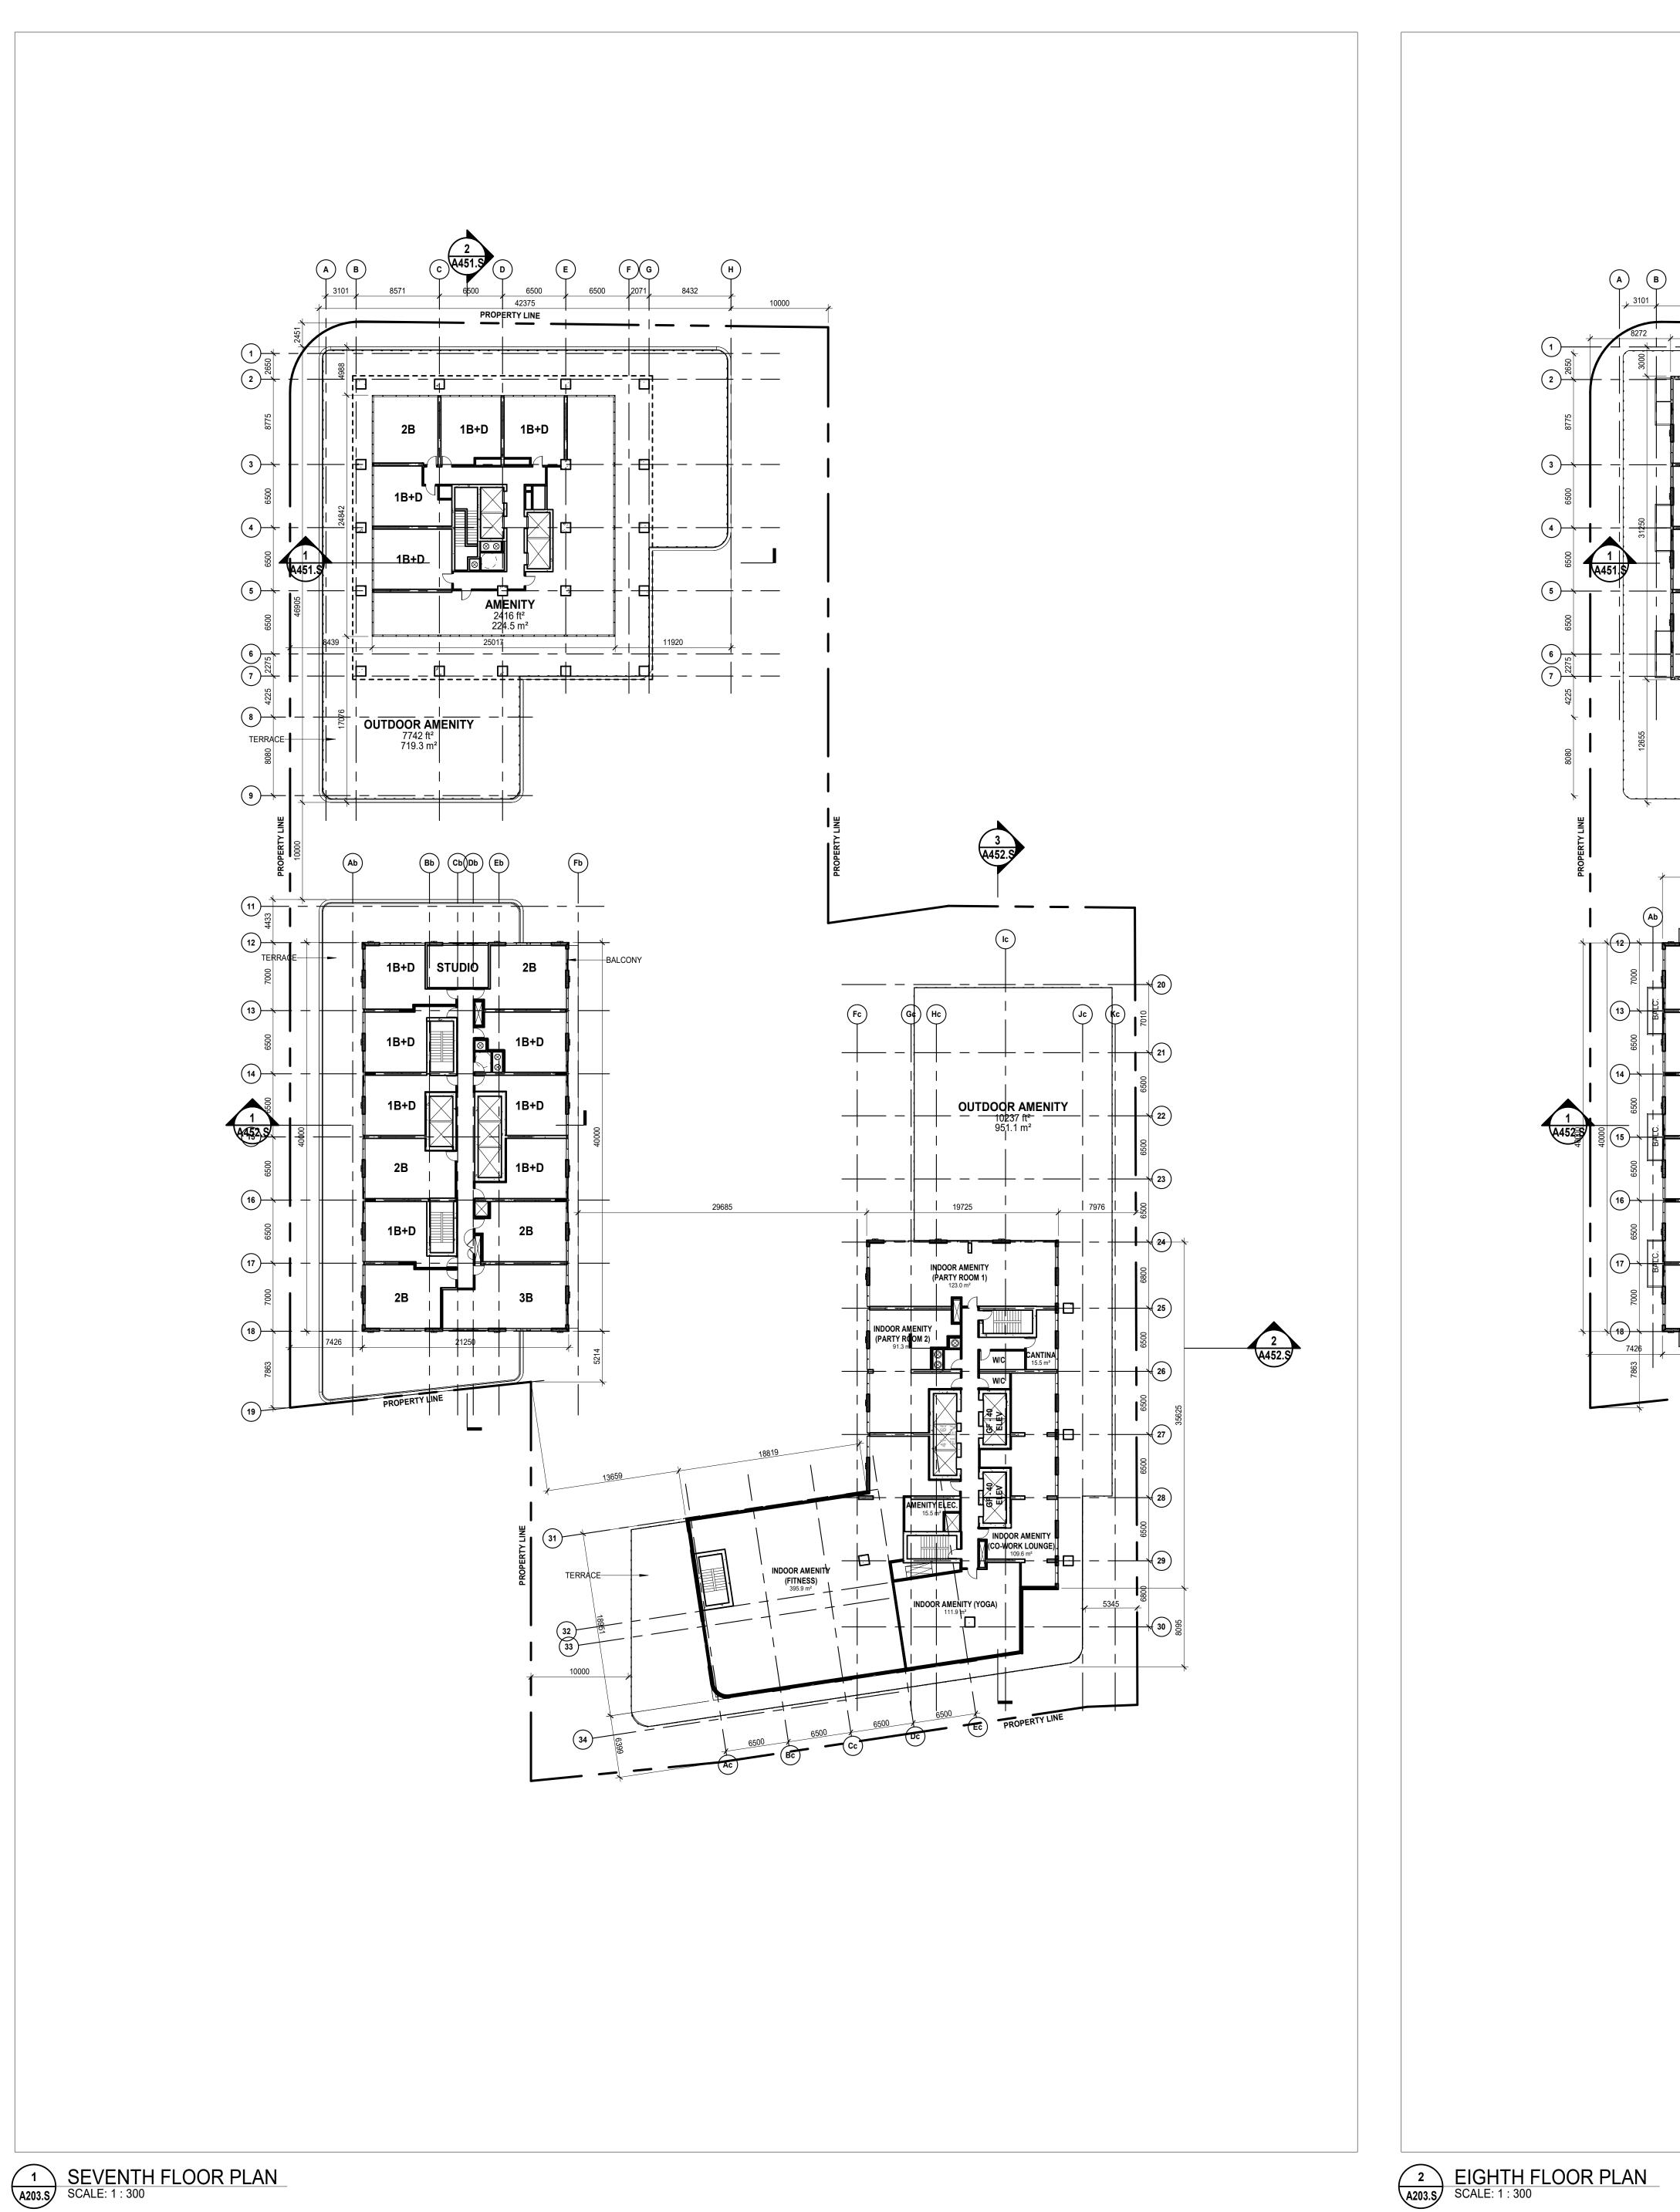


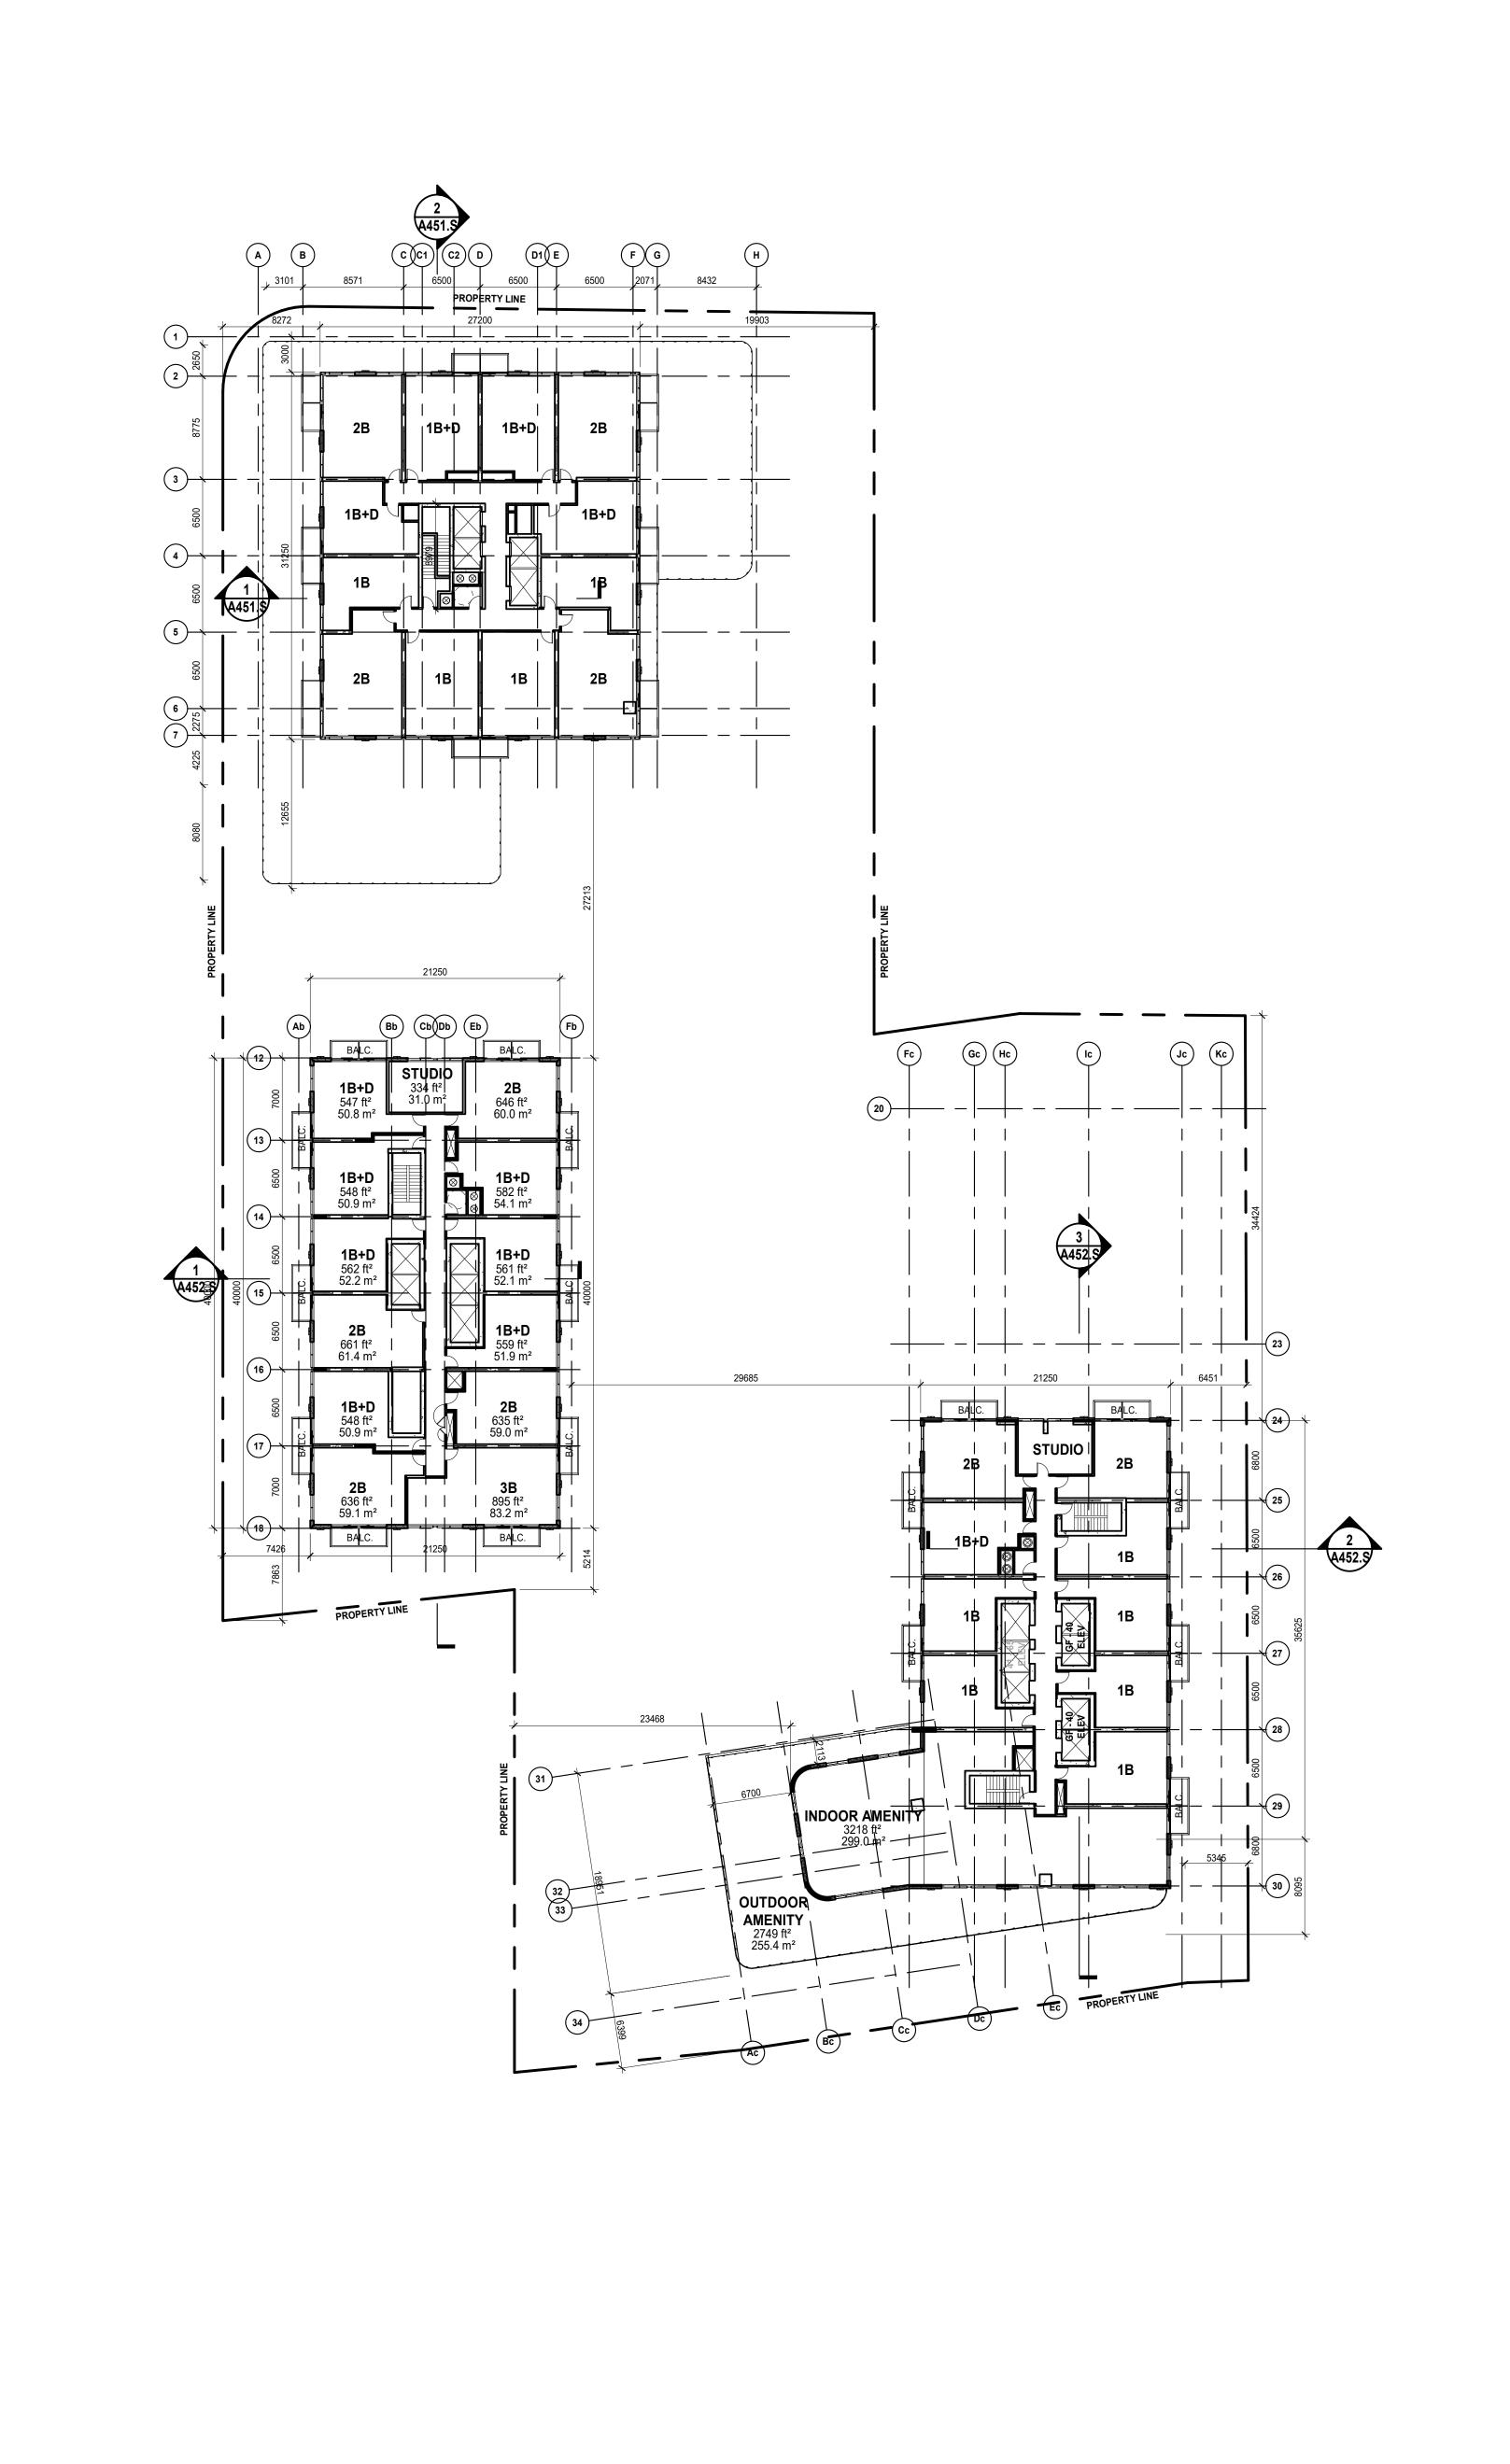

DateNo.DescriptionDateNo.DescriptionREVISION RECORD



2023-10-01 Issued for Rezoning & OLT
2022-04-19 Issued for Rezoning
ISSUERECORD



BDP. Quadrangle

Quadrangle Architects Limited
901 King Street West, Suite 701 Toronto, ON M5V 3H5
t 416 598 1240 www.bdpquadrangle.com


217-227 Cross Avenue and 571-587 Argus Road

19072 1:300 DC KVE PROJECT SCALE DRAWN REVIEWED

Distrikt Developments

Seventh and Eighth Floor Plans

A203.S

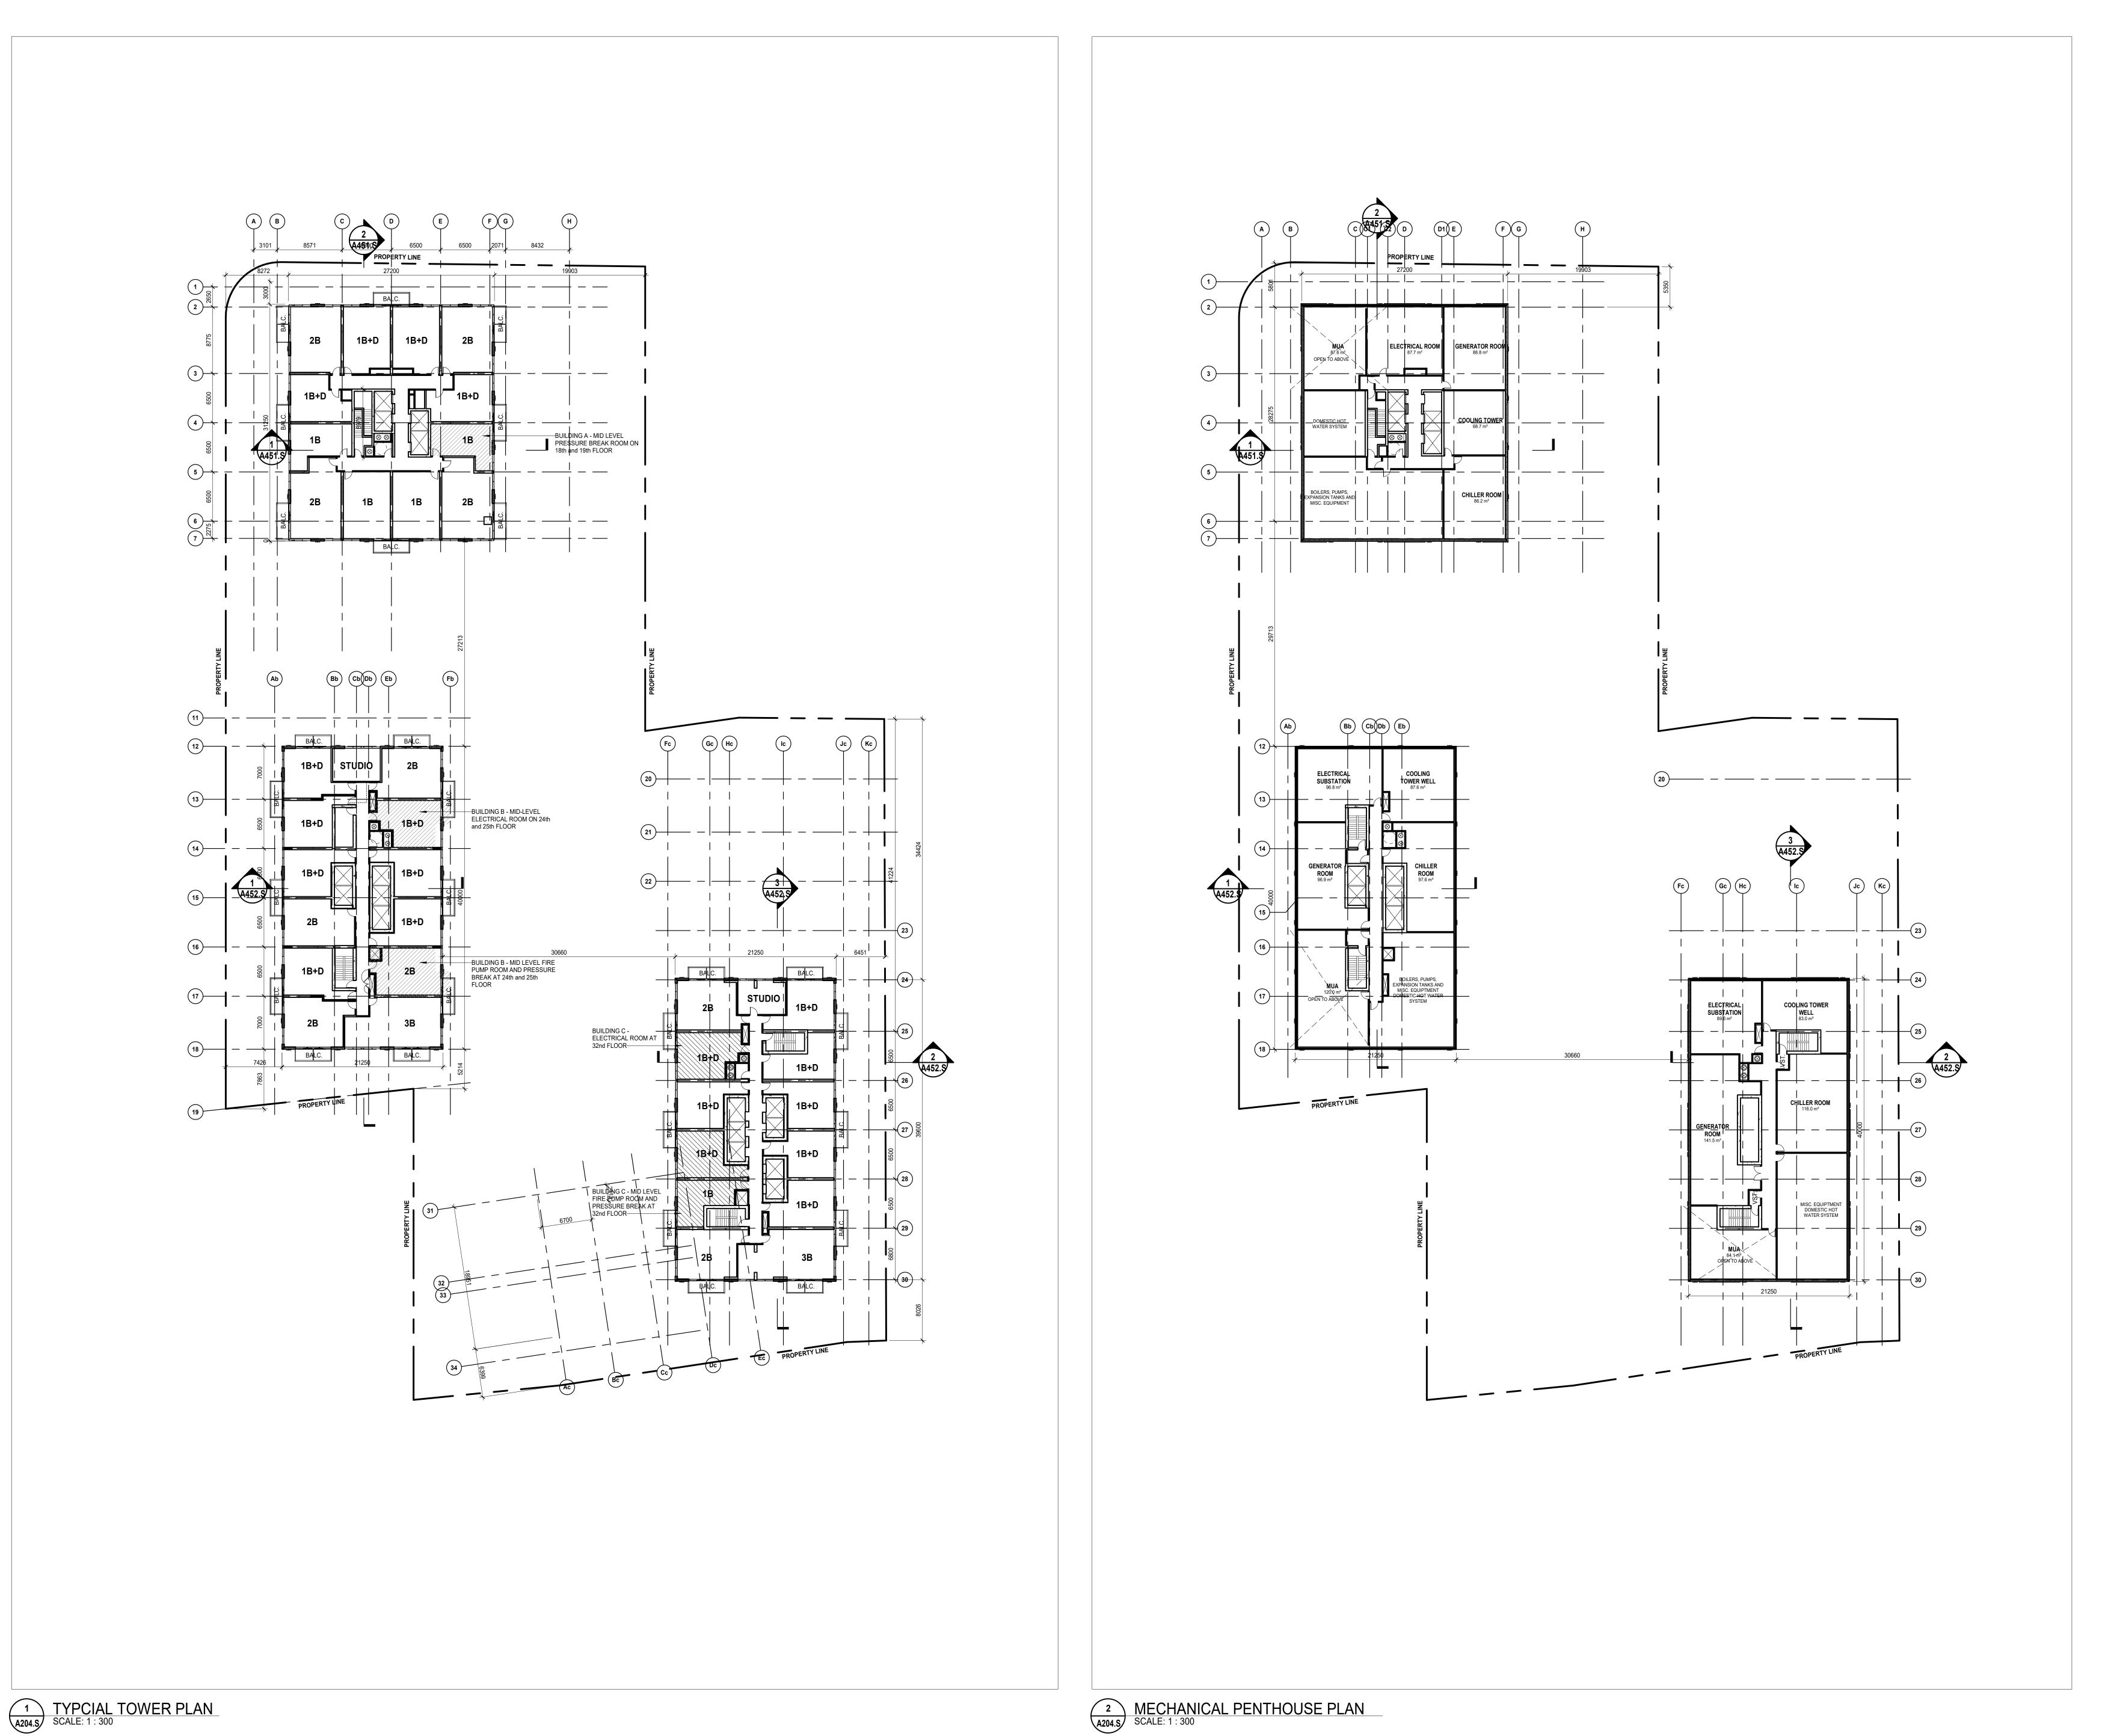


Date No. Description

Date No. Description

REVISION RECORD

2023-10-01 Issued for Rezoning & OLT 2022-04-19 Issued for Rezoning



BDP. Quadrangle

Quadrangle Architects Limited
901 King Street West, Suite 701 Toronto, ON M5V 3H5
t 416 598 1240 www.bdpquadrangle.com

217-227 Cross Avenue and
571-587 Argus Road


for

Distrikt Developments

19072 1:300 DC KVE
PROJECT SCALE DRAWN REVIEWED


Typical Tower and Mechanical Penthouse Plans

A204.S

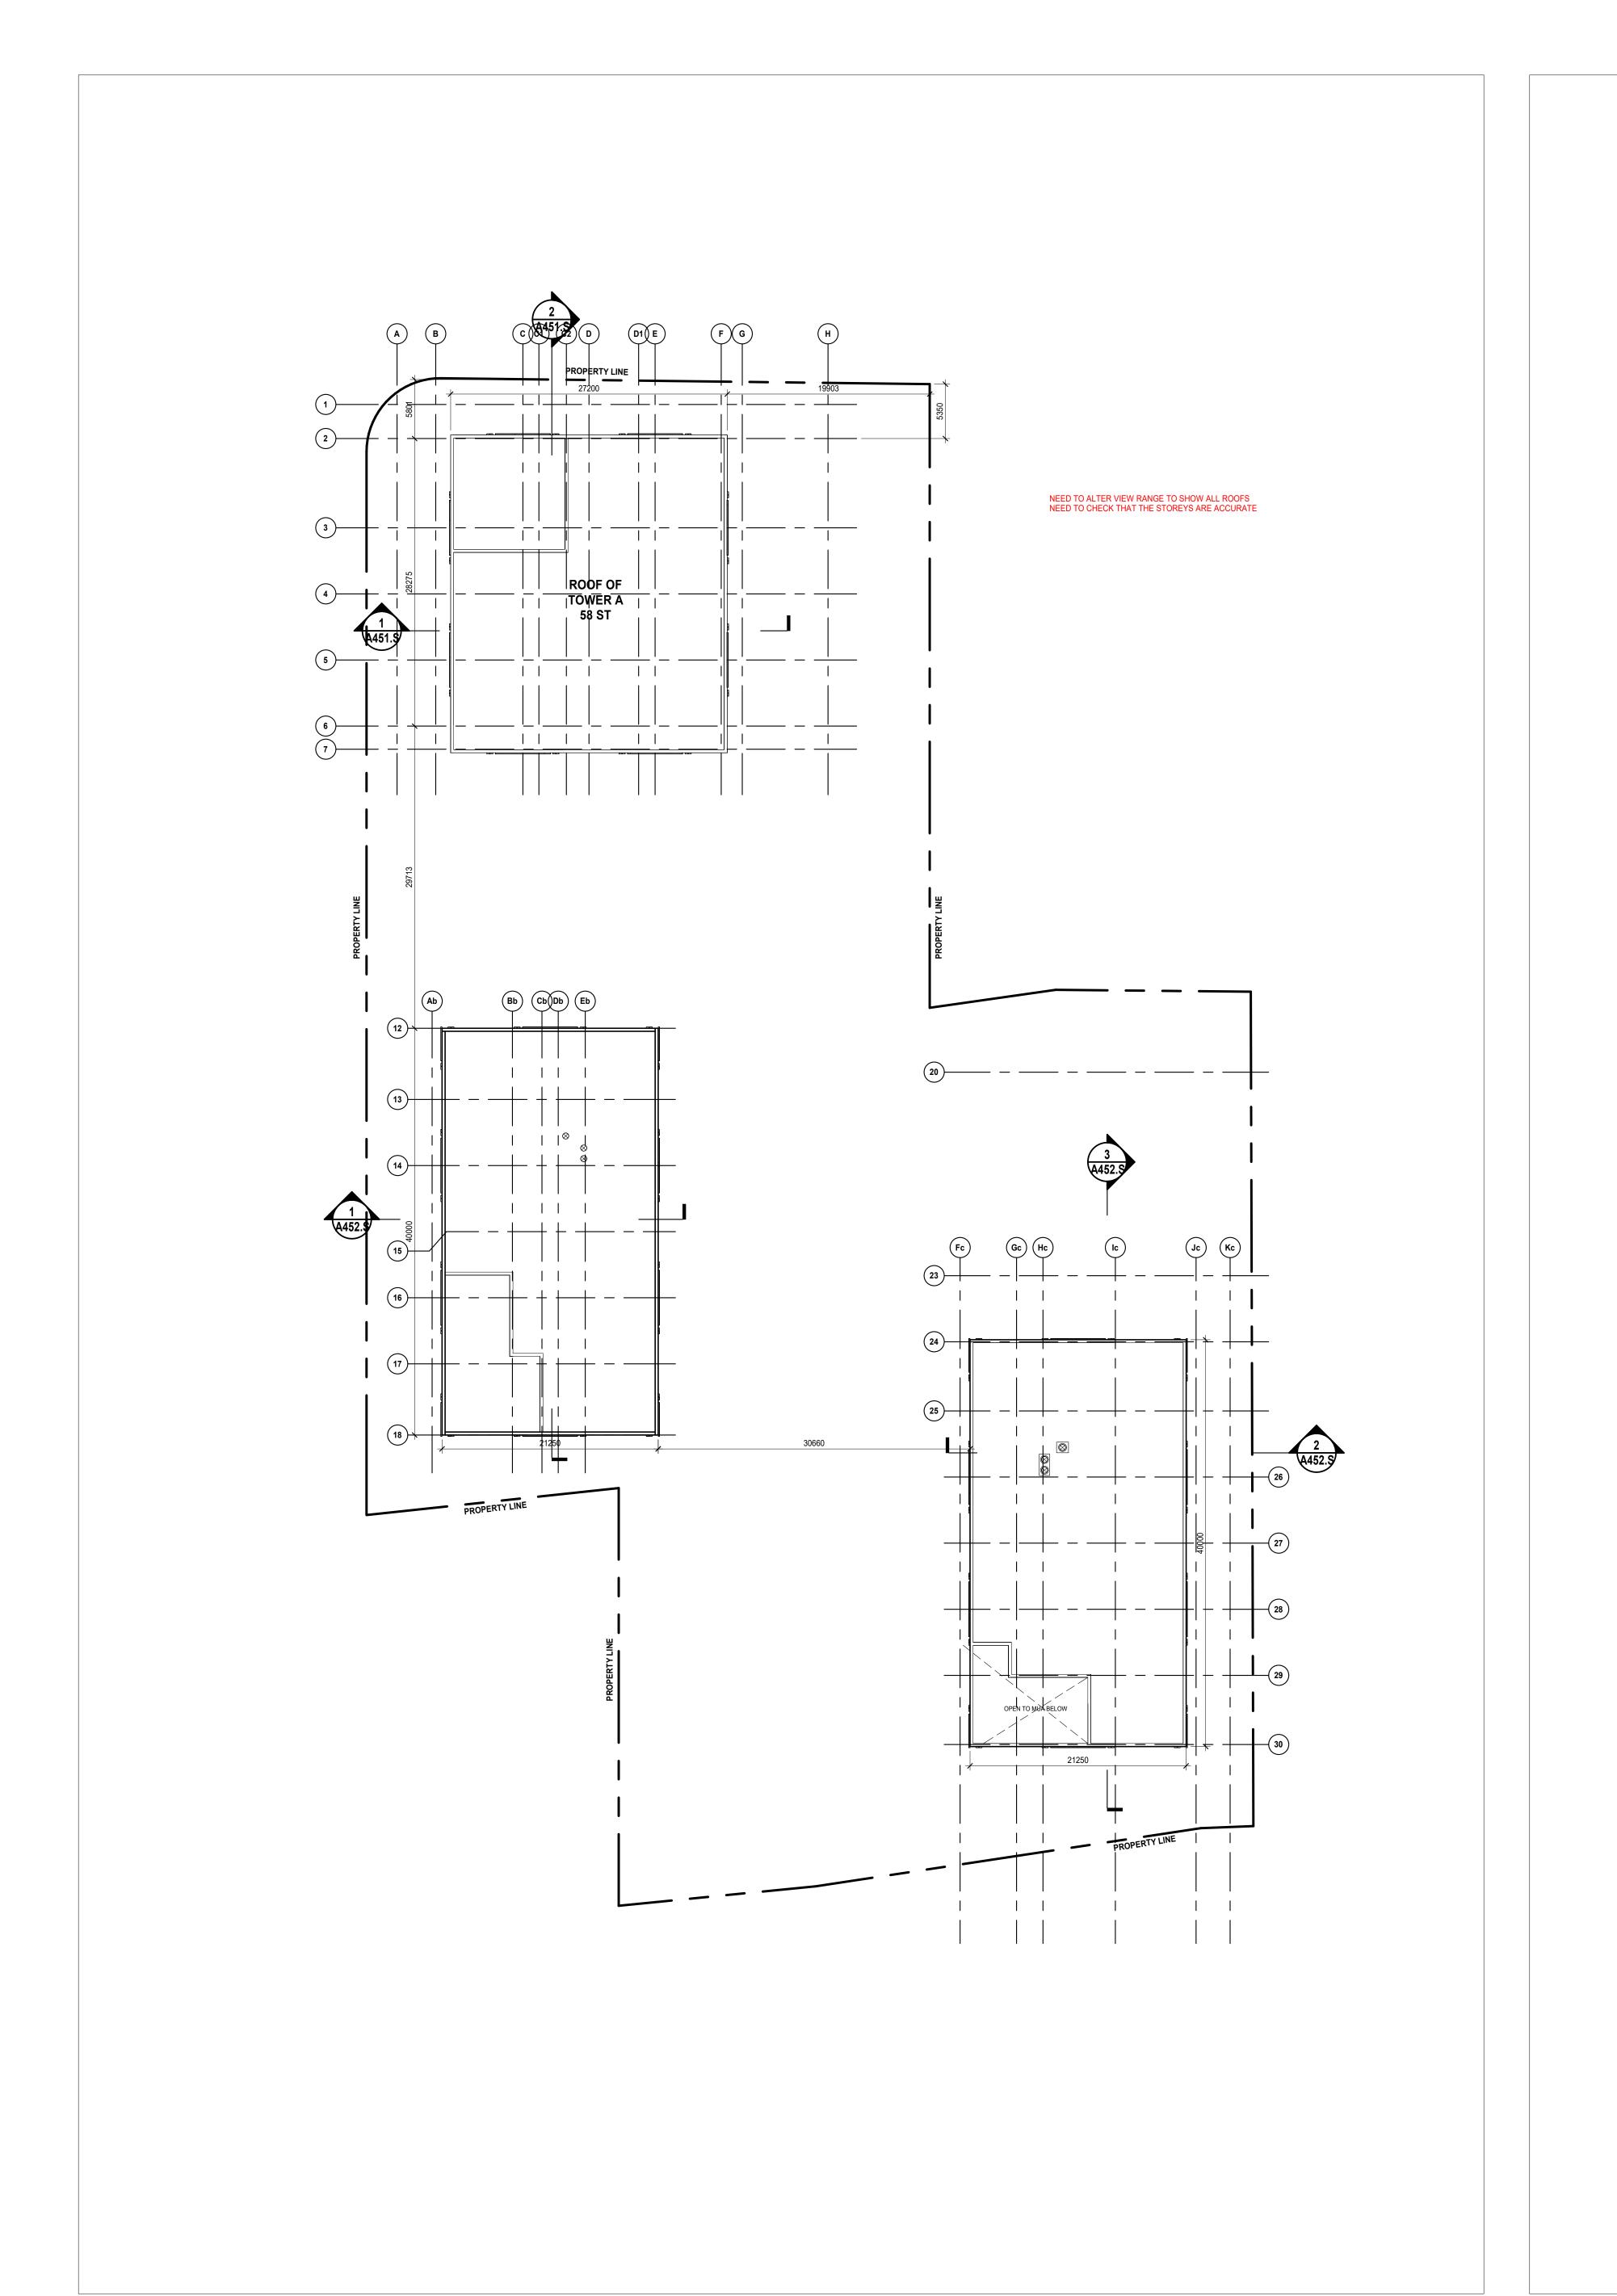

No. Description REVISION RECORD

2023-10-01 Issued for Rezoning & OLT ISSUE RECORD



BDP. Quadrangle

Quadrangle Architects Limited
901 King Street West, Suite 701 Toronto, ON M5V 3H5
t 416 598 1240 www.bdpquadrangle.com

217-227 Cross Avenue and 571-587 Argus Road

Distrikt Developments

19072 1:300 PROJECT SCALE


Roof Plan


A205.S

Note: This drawing is the property of the Architect and may not be reproduced or used without the expressed consent of the Architect. The Contractor is responsible for checking and verifying all levels and dimensions and shall report all discrepancies to the Architect and obtain clarification prior to commencing work.

AuthorChecker

1 ROOF PLAN

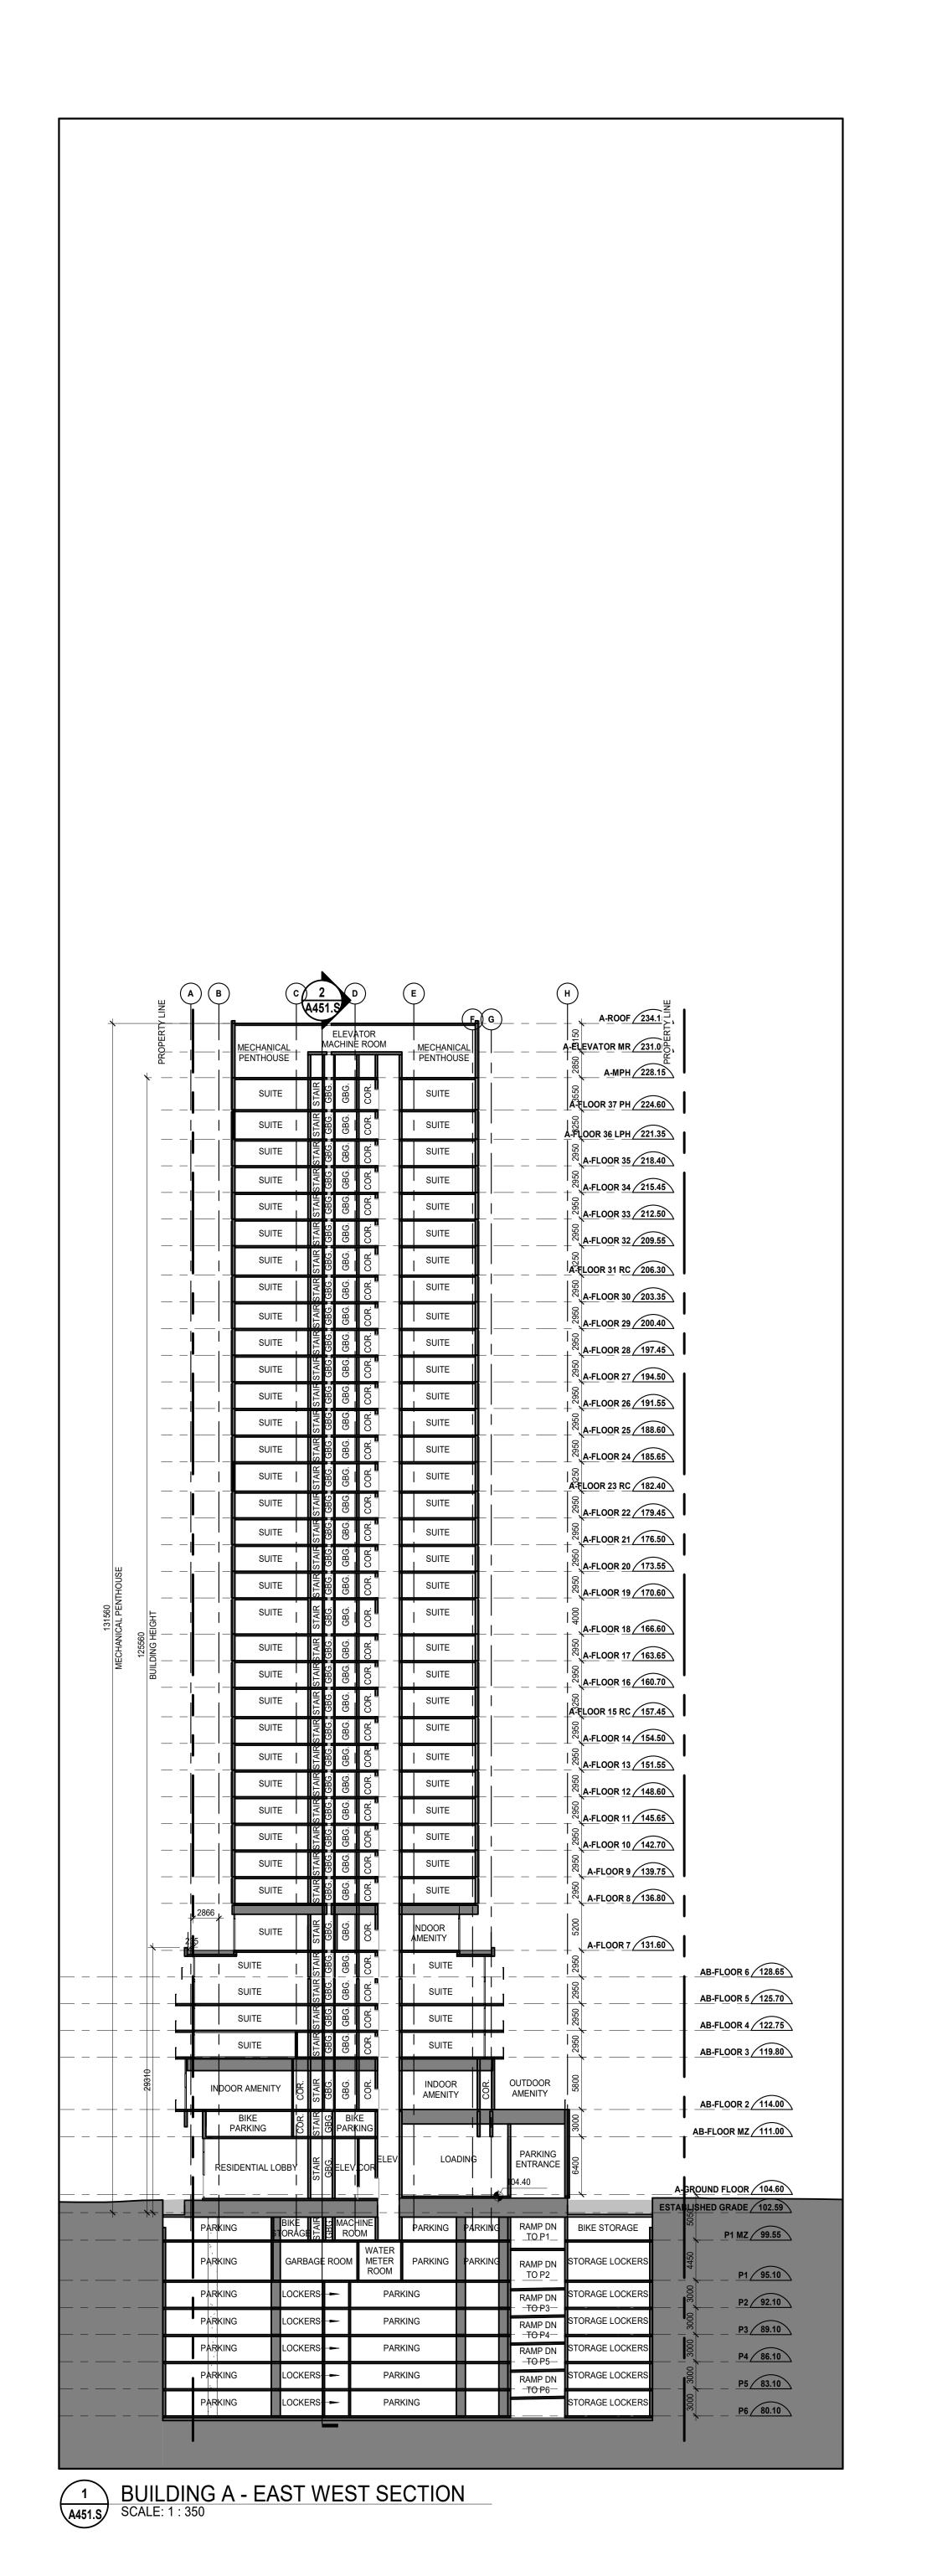

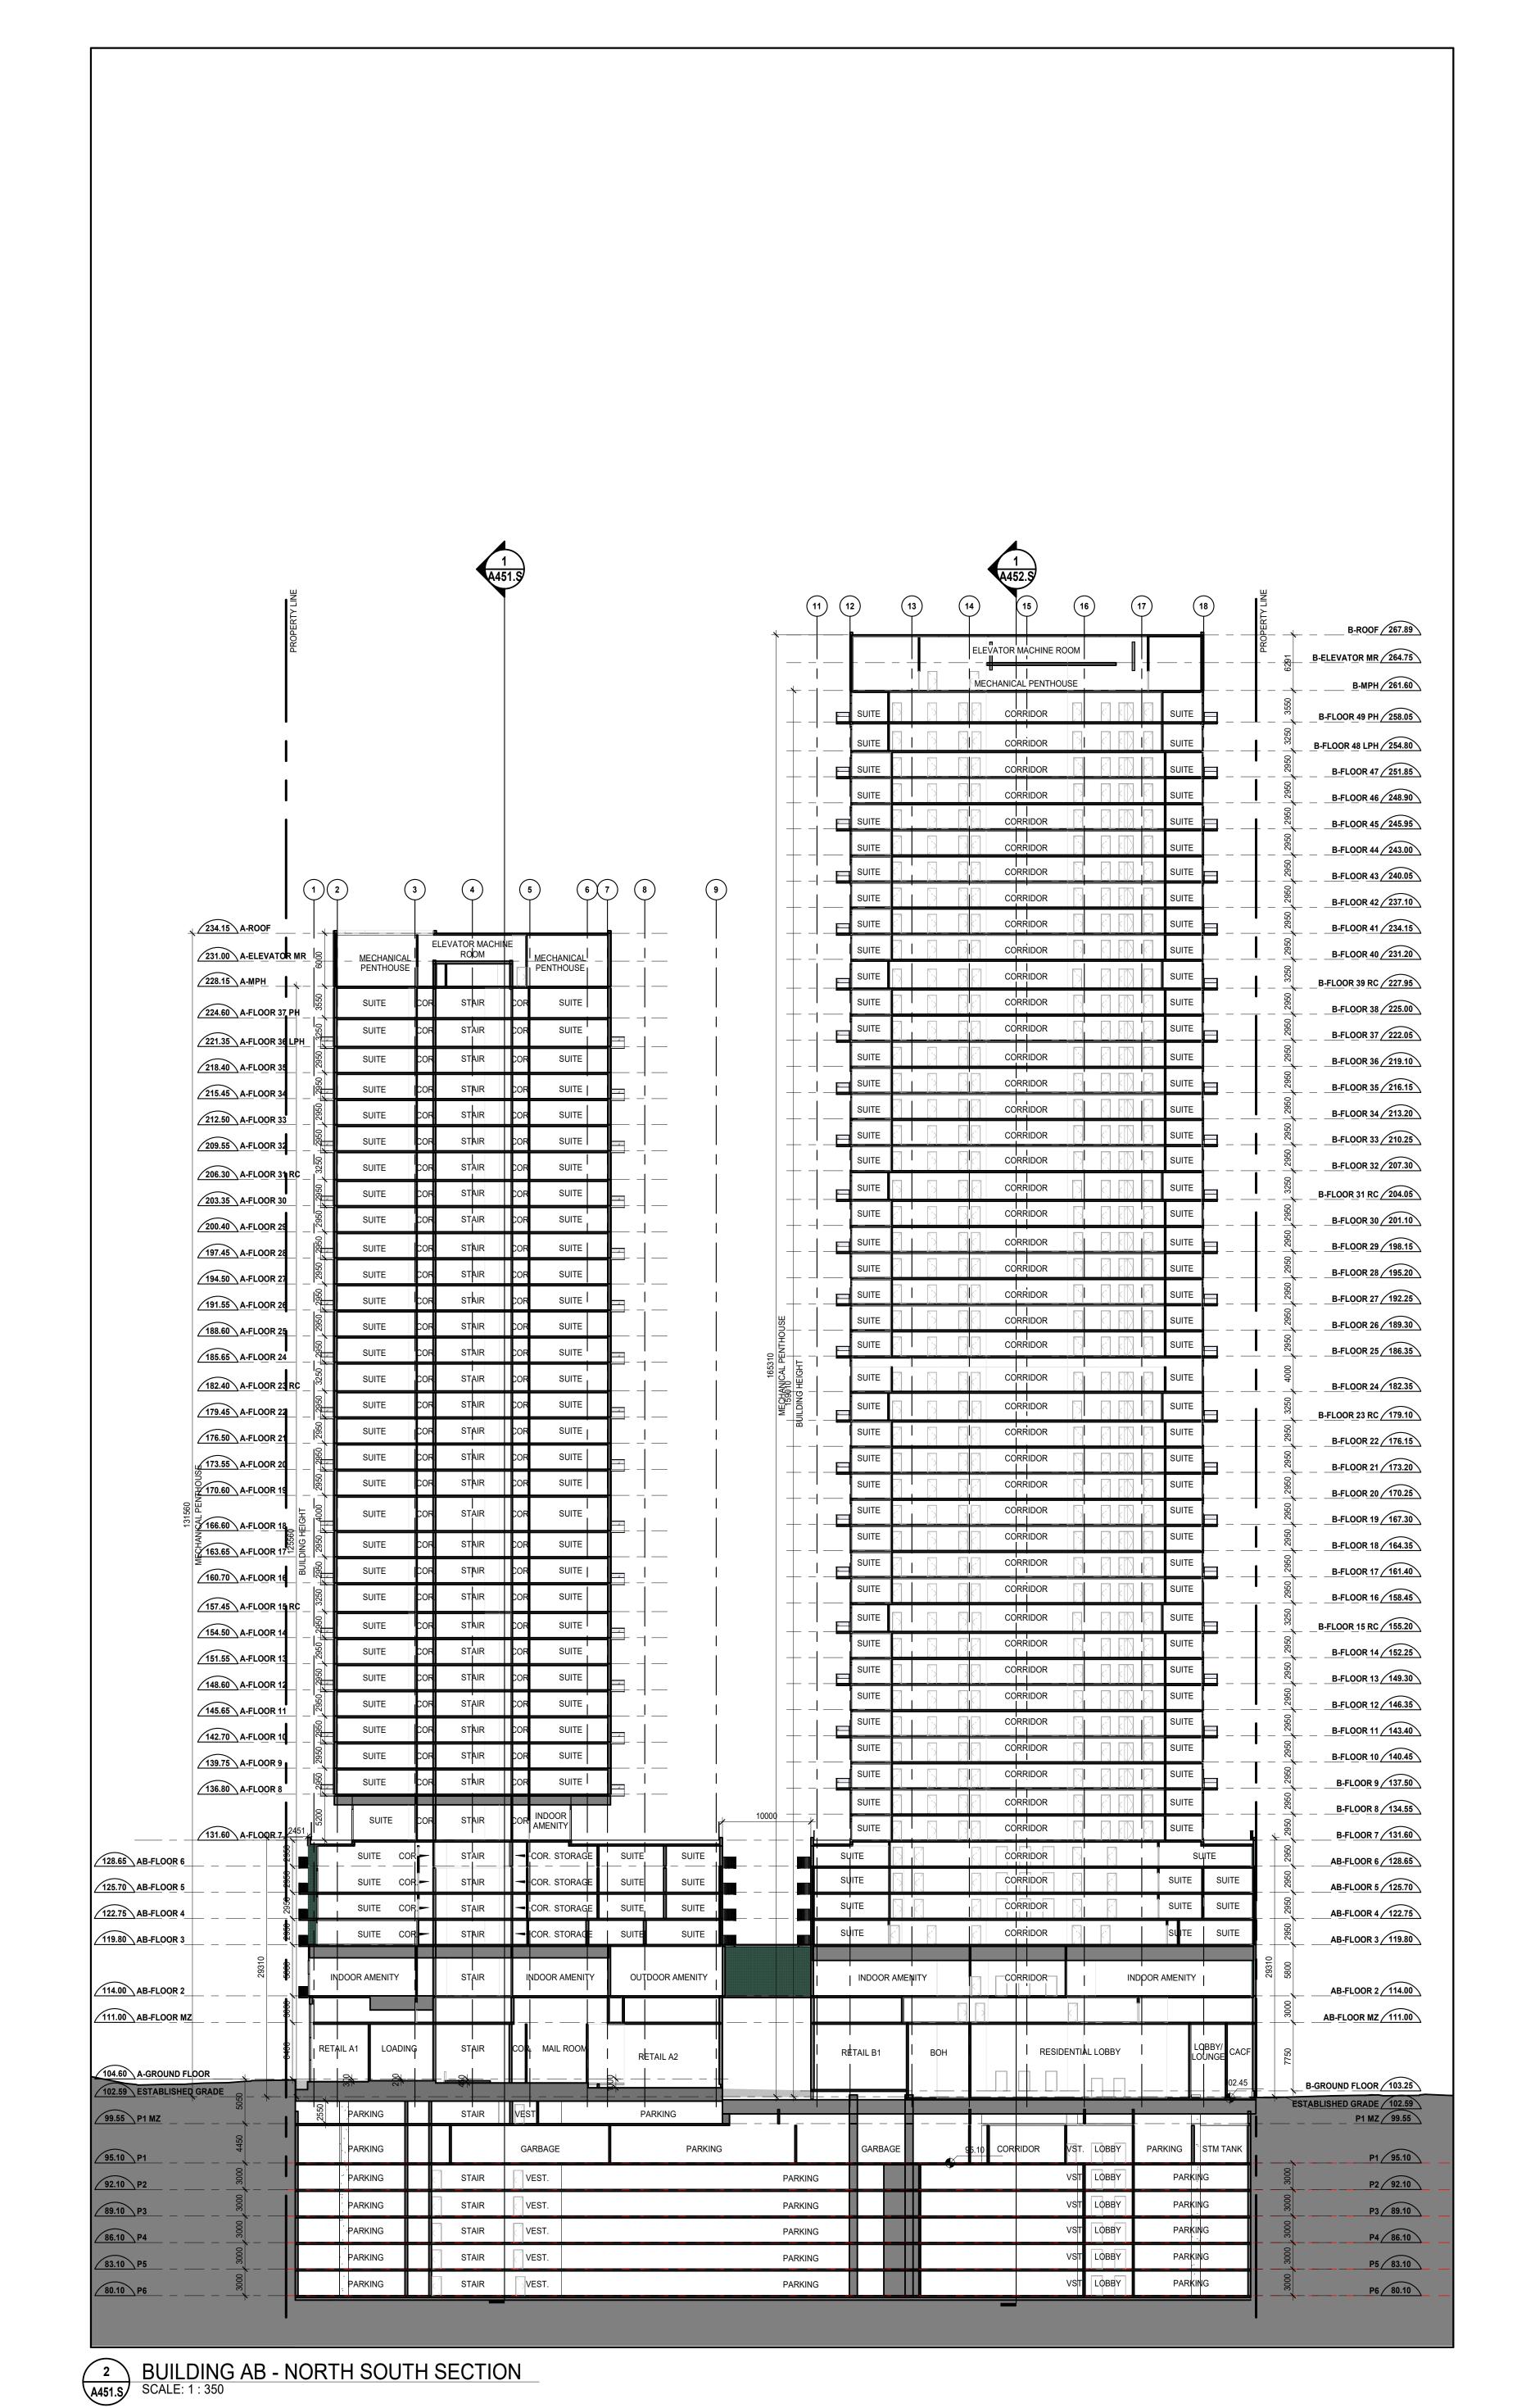

Date No. Description
Date No. Description

REVISION RECORD

024

2023-10-01 Issued for Rezoning & OLT 2022-04-19 Issued for Rezoning

BDP. Quadrangle

Quadrangle Architects Limited
901 King Street West, Suite 701 Toronto, ON M5V 3H5
t 416 598 1240 www.bdpquadrangle.com


217-227 Cross Avenue and 571-587 Argus Road


Distrikt Developments

19072 1:350 EG KVE PROJECT SCALE DRAWN REVIEWED

Building A and B Sections

A451.S

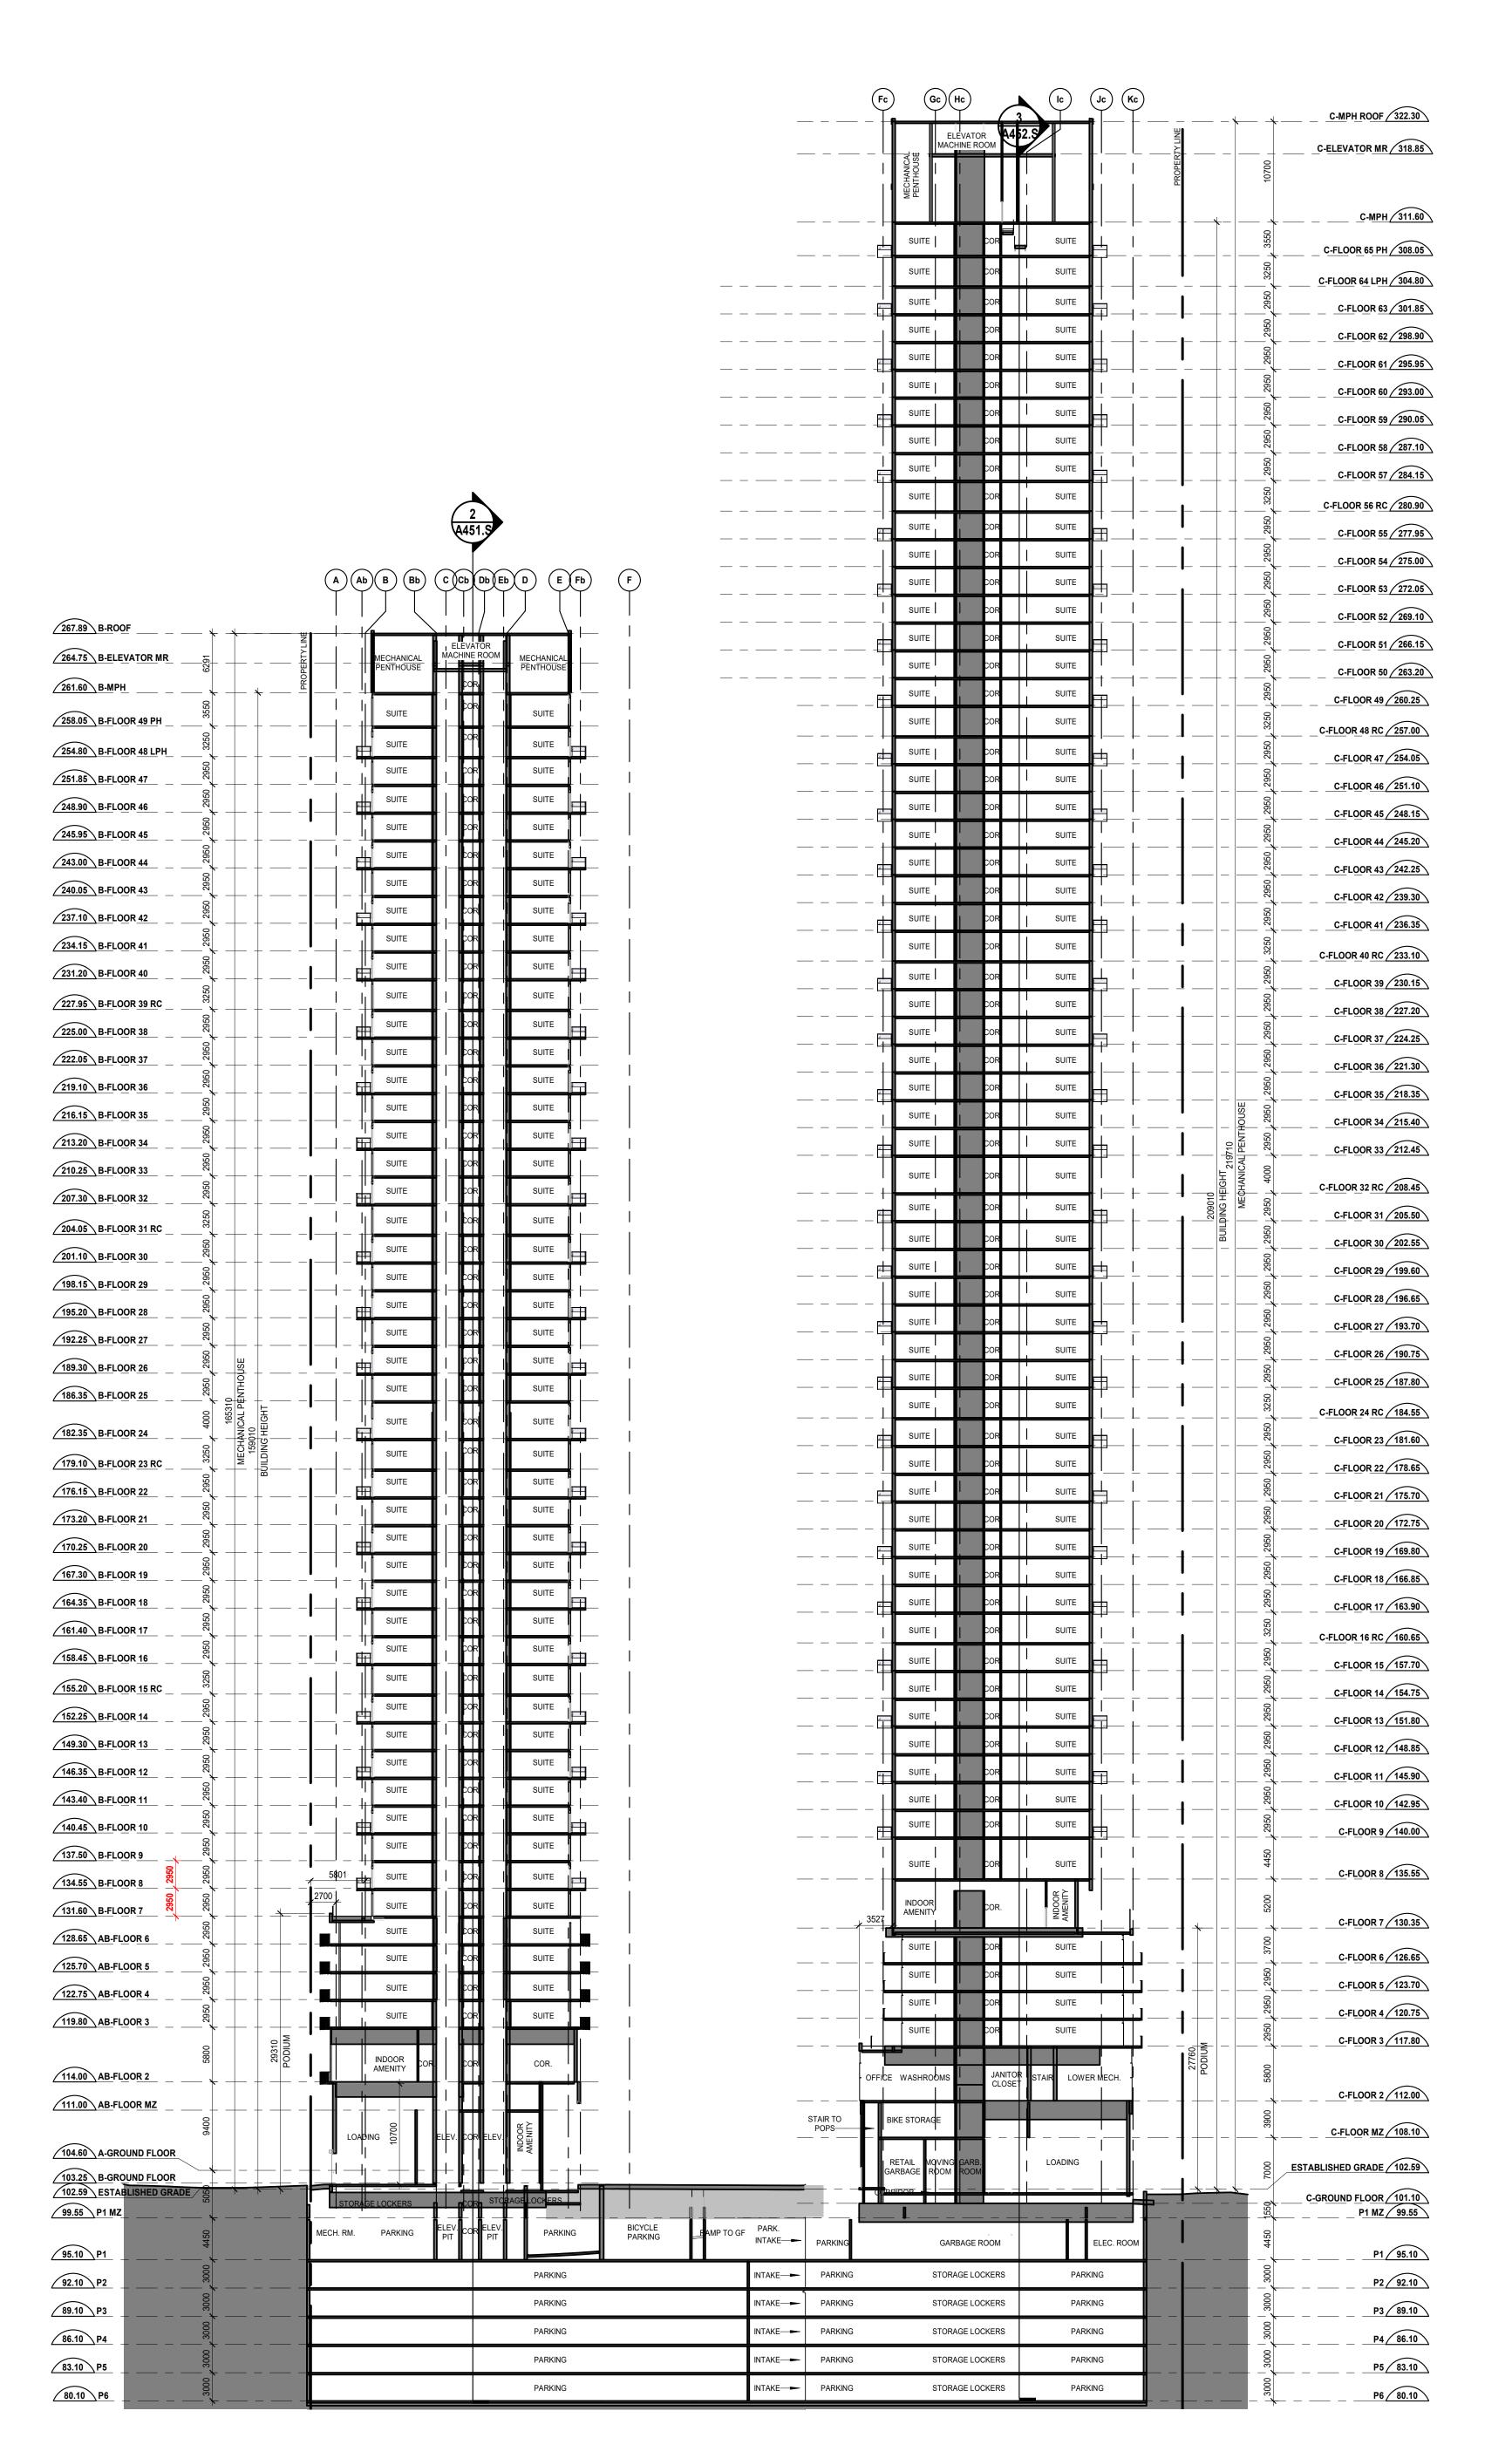

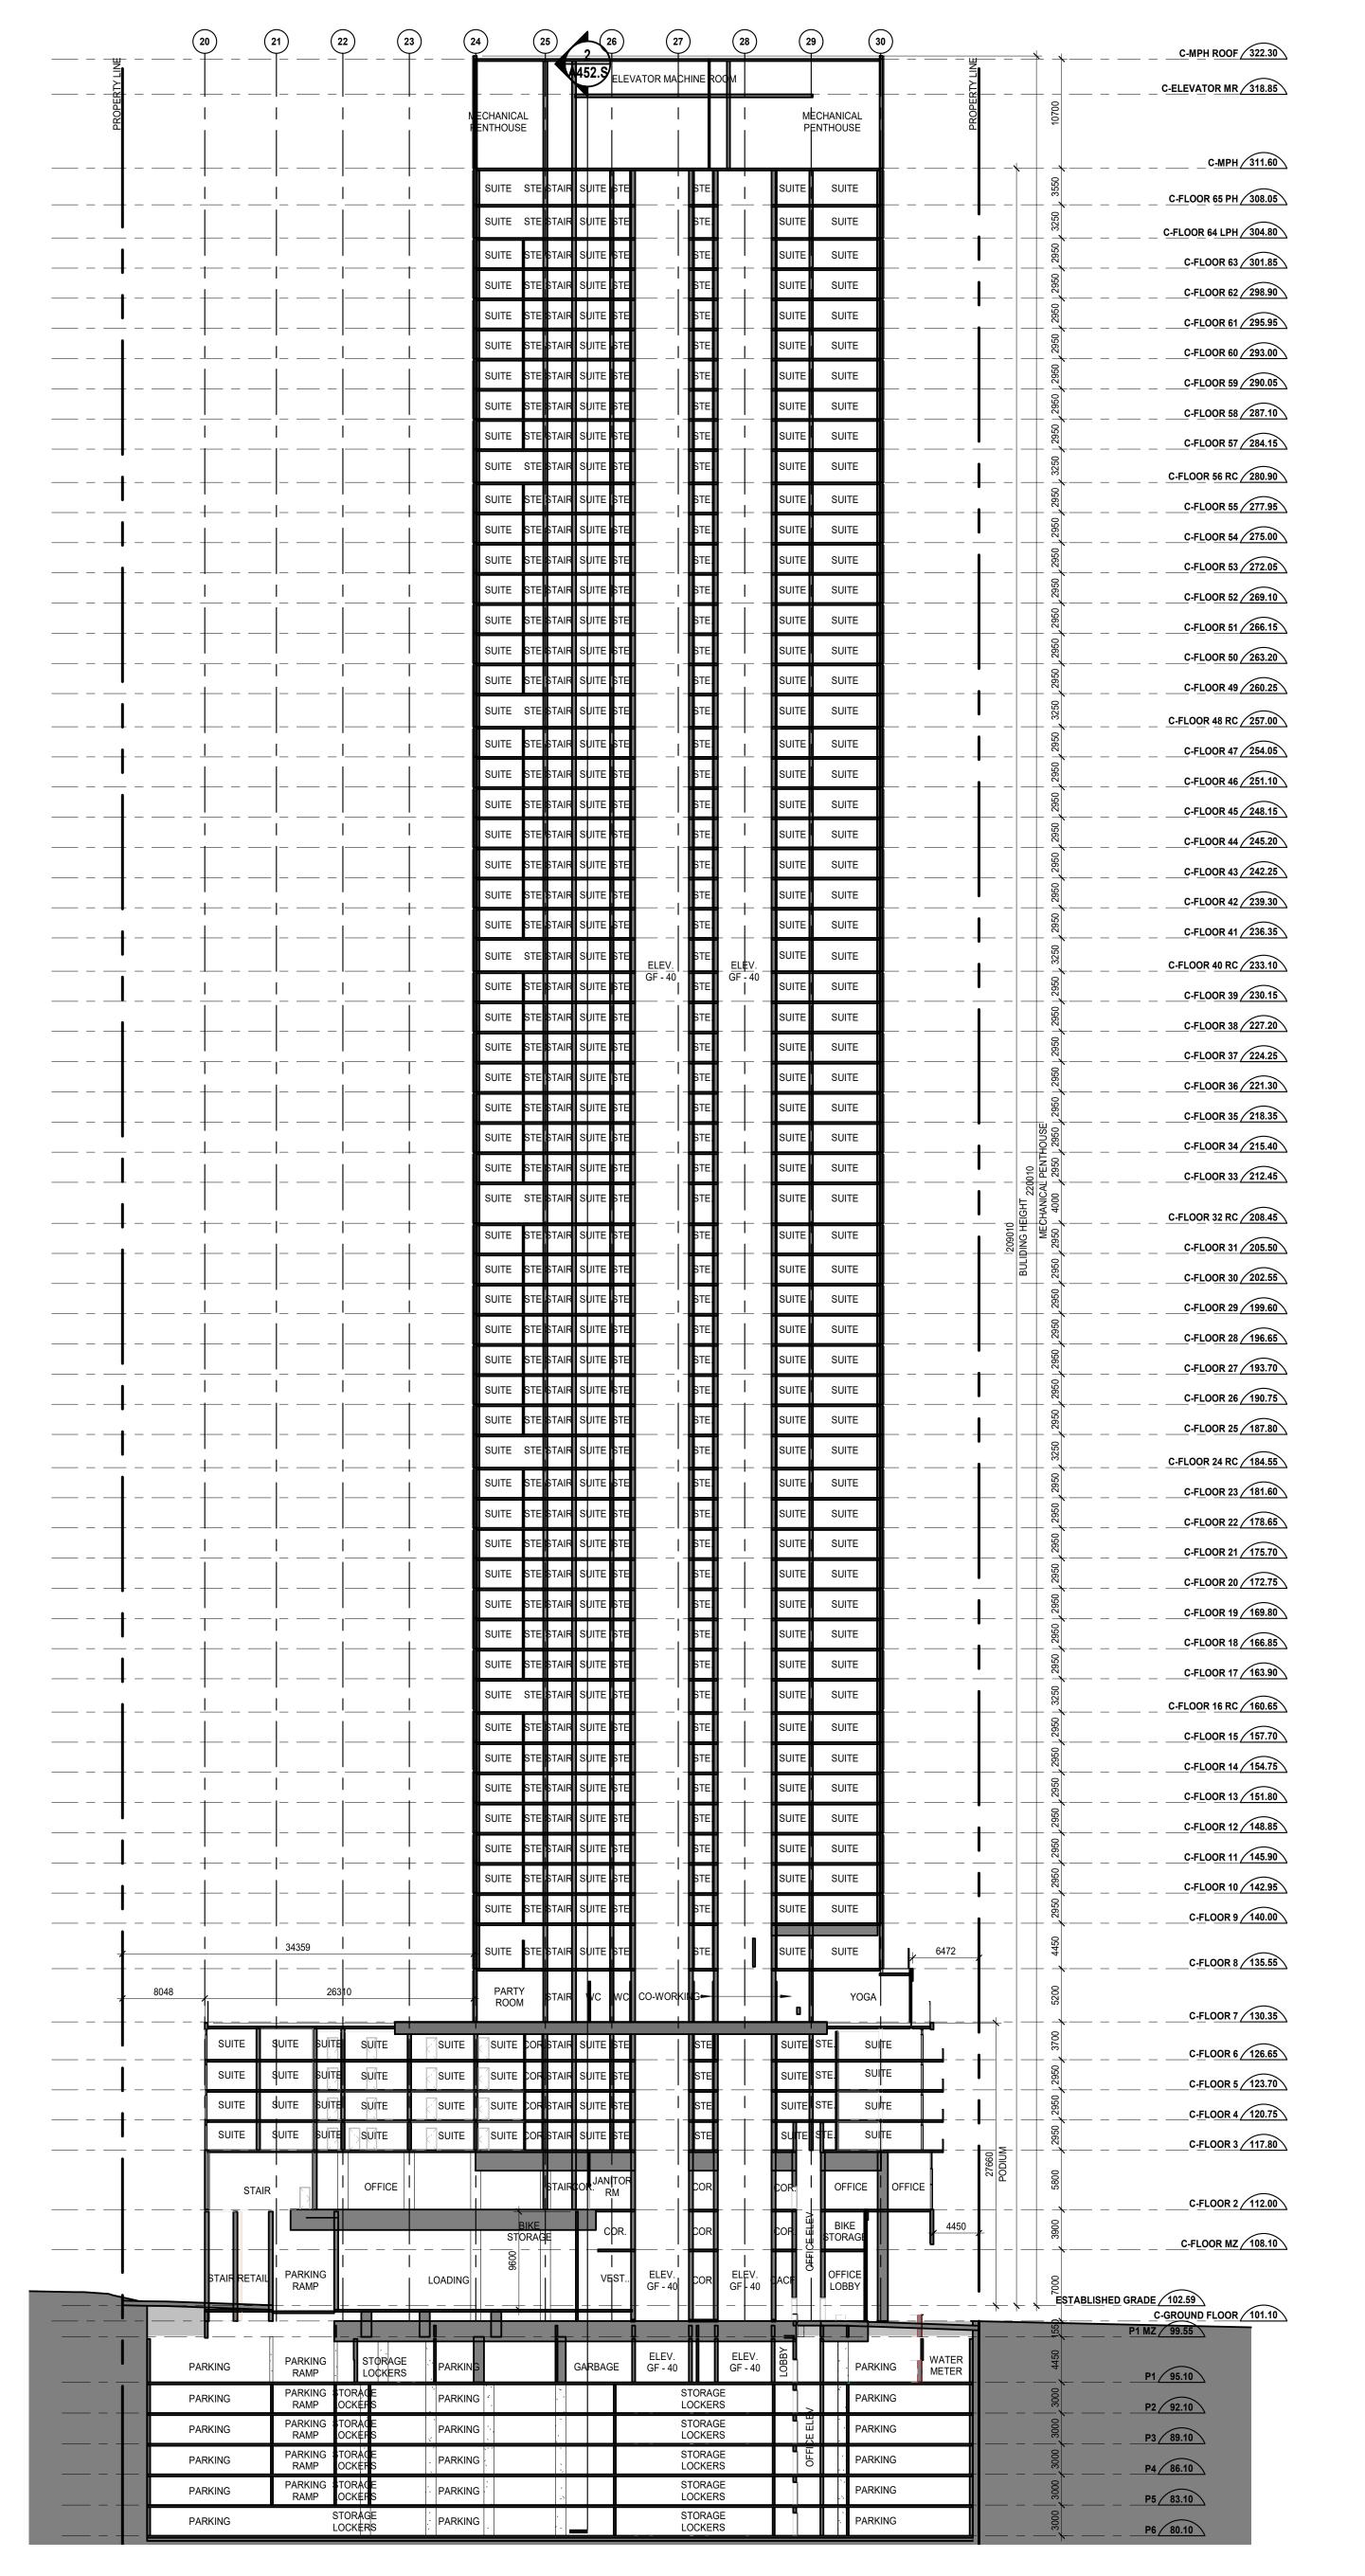

BUILDING B - EAST WEST SECTION
SCALE: 1:350

BUILDING C - EAST WEST SECTION
SCALE: 1:350

BUILDING C - NORTH SOUTH SECTION
SCALE: 1:350

Date No. Description

No. Description

REVISION RECORD

000

2023-10-01 Issued for Rezoning & OLT 2022-04-19 Issued for Rezoning

BDP. Quadrangle

Quadrangle Architects Limited
901 King Street West, Suite 701 Toronto, ON M5V 3H5
t 416 598 1240 www.bdpquadrangle.com

217-227 Cross Avenue and 571-587 Argus Road

Distrikt Developments

19072 1:350 EG KVE
PROJECT SCALE DRAWN REVIEWED

Building B and C Sections

A452.S